

YE-4G20



# YG

## 4G MILLS

**Y-COATED SOLID CARBIDE END MILLS**  
High Speed Cutting for Pre-Hardened Steels up to HRC55

**YG-1 CO., LTD.**

**HEAD OFFICE**

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

**Note** The information is provided for reference only. Tool specifications are subject to change without prior notice.  
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.  
YG-1 or publishers are not liable for any damage for use of the information.




Search 'YG-1' on social media outlets

YG1E2200619008


## High Speed Cutting for Pre-Hardened Steels up to HRc55 - 4G MILLS

Suitable for a wide range of work material, specifically for increasing tool life when machining pre-hardened materials, low hardness materials, cast iron, etc. High speed cutting, dry and wet cut recommended together.

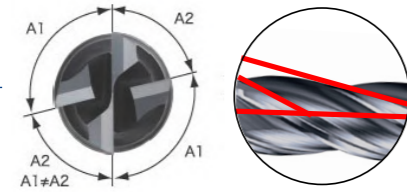


### Unequal Index & Multiple Helix

4G Mills, 4 Flute Multiple Helix End Mills exclusively designed to reduce vibration and also to achieve excellent chip evacuation



### Optimal Edge Preparation

All 4G Mills products contain an Optimal Edge Preparation to prevent chipping, also obtaining an excellent surface finish with a longer tool life in High Speed Cutting



### Ultra Micro Grain & Nano Grain Carbide

Premium Grade Carbide Substrate Materials achieving exceptional wear resistance making it possible for High Precision Machining

### High Technology Y-Coating

AlCr Based, YG-1's High Technology In-house coating for maximum tool life and high performance Excellent quality coating developed by YG-1

### Holds a Large Variety of Product Range for Multiple Use


Large Variety of Products For Several Different Applications with Different Size and Lengths  
 ▶ Size : Ø0.03mm~Ø25.0mm




## CASE STUDY

### ▶ Y-Coated Solid Carbide 2 Flute, Ball End Mills


Cutting Conditions	
Tool	SEMD98060E
Size(mm)	Ø6 x 6 x 12 x 90
Work Material	KP4M (HRc35 / DIN 1.2738 Improved)
Cutting Speed	130.061 m/min.
RPM	6900 rev./min.
Feed	830 mm/min.
Feed per tooth	0.060 mm/tooth
Milling Method	Profiling
Milling Depth	Axial : 0.2 mm Radial : 1.2 mm
Coolant	Oil Mist
Overhang	26 mm
Machine	Machining Center

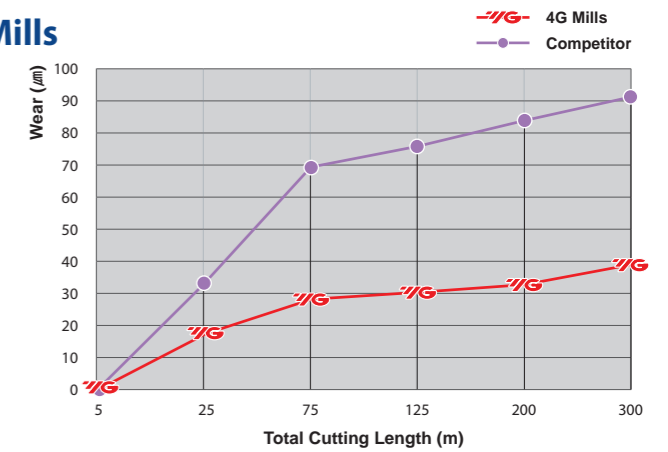

Competitor (Total Cutting Length : 300m)

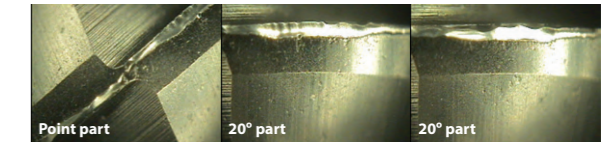


4G MILLS (Total Cutting Length : 300m)

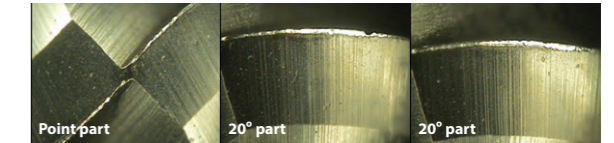


### ▶ Y-Coated Solid Carbide 4 Flute, Corner Radius End Mills


Cutting Conditions	
Tool	SEME0110005E
Size(mm)	Ø10(R0.5) x 10 x 25 x 100
Work Material	KP4M (HRc35 / DIN 1.2738 Improved)
Cutting Speed	51.522 m/min.
RPM	1640 rev./min.
Feed	180 mm/min.
Feed per tooth	0.027 mm/tooth
Milling Method	Down & Side Cutting
Milling Depth	Axial : 25 mm Radial : 0.5 mm
Coolant	Oil Mist
Overhang	41 mm
Machine	Machining Center

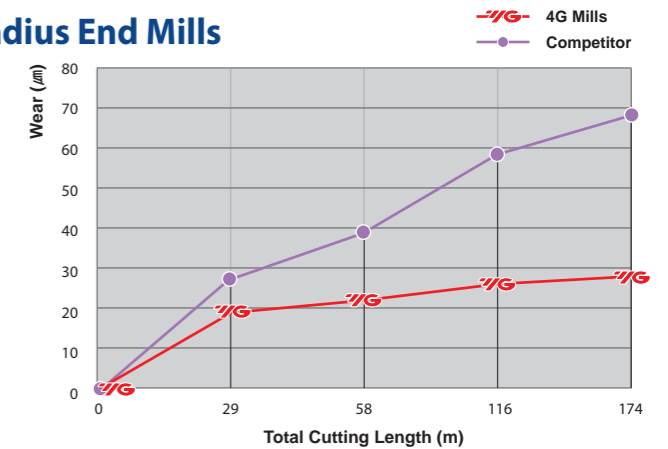

Competitor (Total Cutting Length : 174m)



4G MILLS (Total Cutting Length : 174m)



SELECTION GUIDE



**SOLID CARBIDE**  
**4G MILL**  
**END MILLS**  
 High Speed Cutting  
 for Pre-Hardened Steels up to HRc55


Material Groups  
 Go to page 188  
 Please visit [globalyg1.com/mat](http://globalyg1.com/mat)  
 for material search

Recommended cutting conditions : P 118

⊙ : Excellent ○ : Good


SERIES	SEMD98	SEM846	SEM846	SEMD99
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.05	R0.05	R0.25	D0.2
SIZE MAX	R12.5	R6.0	R1.0	D20.0
PAGE	8	14	24	27

-	EXTENDED NECK	EXTENDED NECK (6mm Shank)	-
Y-Coating	Y-Coating	Y-Coating	Y-Coating

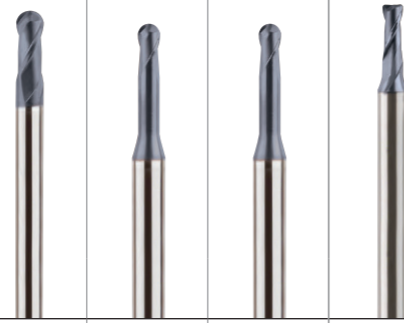

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	SEMD98	SEM846	SEM846	SEMD99	
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○	
	2		About 0.45% C Annealed	190	13	○	○	○	○	
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	○	
	4		About 0.75% C Annealed	270	28	⊙	⊙	⊙	⊙	
	5		About 0.75% C Quenched & Tempered	300	32	⊙	⊙	⊙	⊙	
	6	Low alloy steel	Annealed	180	10	○	○	○	○	
	7		Quenched & Tempered	275	29	○	○	○	○	
	8		Quenched & Tempered	300	32	⊙	⊙	⊙	⊙	
	9		Quenched & Tempered	350	38	⊙	⊙	⊙	⊙	
	10	High alloyed steel, and tool steel	Annealed	200	15	○	○	○	○	
	11		Quenched & Tempered	325	35	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○	
	18		Pearlitic	250	25	○	○	○	○	
	19		Ferritic	130		○	○	○	○	
20	Malleable cast iron	Pearlitic	230	21	○	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110						
	27		CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Ni or Co Based Cured	350	38					
	35		Cast	320	34					
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55	○	○	○	○	
	39		Hardened	630	60					
	40	Chilled Cast Iron	Cast	400	42	⊙	⊙	⊙	⊙	
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○	

SERIES	SEME61	SEME01	SEME64	SEME35	SEME35	SEME35	SEME70	SEM845	SEME36	SEME71	SEME72	SEME73	SEME75
FLUTE	2	4	4	2	2	2	2	2	4	4	4	4	6
HELIX ANGLE	30°	27°/30° (MULTIPLE HELIX)	27°/30° (MULTIPLE HELIX)	30°	30°	30°	30°	30°	27°/30° (MULTIPLE HELIX)	35°/38° (MULTIPLE HELIX)	30°	30°	45°
CORNER RADIUS	D0.2	D1.0	D1.0	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D0.2	D1.0	D1.0	D0.1	D0.1	D0.1	D1.0	D0.1	D0.8	D1.0	D1.0	D1.0	D6.0
SIZE MAX	D20.0	D20.0	D20.0	D25.0	D4.0	D3.0	D25.0	D12.0	D25.0	D20.0	D25.0	D12.0	D20.0
PAGE	35	54	61	76	79	80	81	87	96	98	102	108	113
	EXTENDED NECK	-	EXTENDED NECK	-	(4mm Shank)	(3mm Shank)	LONG LENGTH	EXTENDED NECK	-	(Sharp Corner Removal)	LONG LENGTH	EXTENDED NECK	-
	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating

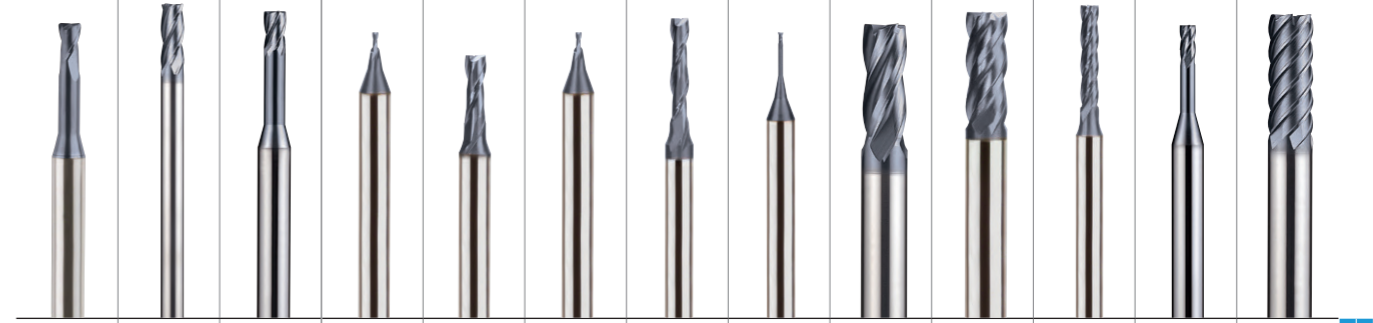

○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



**SOLID CARBIDE & HSS-PM**  
**X-SPEED ROUGHER**  
**END MILLS**

High Speed Cutting  
 for Pre-Hardened Steels up to HRc40

Material Groups  
 Go to page 188  
 Please visit [globalyg1.com/mat](http://globalyg1.com/mat)  
 for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 186

SERIES	G9D75 G9D67	G9D76 G9D68	G9D77 G9D69	GAE53
FLUTE	4&5	4&5	4&5	4&5
HELIX ANGLE	44°~45° (MULTIPLE HELIX)	44°~45° (MULTIPLE HELIX)	44°~45° (MULTIPLE HELIX)	44°~45° (MULTIPLE HELIX)
CUTTING EDGE SHAPE	CORNER RADIUS ROUGHING	CORNER RADIUS ROUGHING	CORNER RADIUS ROUGHING	CORNER RADIUS ROUGHING
SIZE MIN	D6.0	D6.0	D6.0	D6.0
SIZE MAX	D20.0	D20.0	D20.0	D20.0
PAGE	115	115	116	117

SHORT LENGTH	LONG LENGTH	LONG REACH	SHORT LENGTH
X-Coating	X-Coating	X-Coating	X-Coating
			HSS-PM



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	G9D75	G9D76	G9D77	GAE53
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○
	2		About 0.45% C Annealed	190	13	○	○	○	○
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	○
	6	Low alloy steel	Annealed	180	10	○	○	○	○
	7		Quenched & Tempered	275	29	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎	○
	9		Quenched & Tempered	350	38	◎	◎	◎	○
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11	Quenched & Tempered		325	35	◎	◎	◎	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	
	14		Austenitic	180	10	○	○	○	◎
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	◎
	16		Pearlitic (Martensitic)	260	26	◎	◎	◎	◎
	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎	◎
	18		Pearlitic	250	25	◎	◎	◎	◎
	19	Malleable cast iron	Ferritic	130		◎	◎	◎	◎
20	Pearlitic		230	21	◎	◎	◎	◎	
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○
	27		CuZn, CuSnZn (Brass)	90		○	○	○	○
28	CuSn, lead-free copper and electrolytic copper		100		○	○	○	○	
29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm					
37	Alpha + Beta Alloys		Hardened	1050 Rm					
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Hardened Cast Iron		Cast	400	42			
	41			Hardened	550	55			



**CHARACTERISTICS**

Unique flute design for excellent chip evacuation and vibration reduction.  
 Optimal roughing tooth profile to reduce cutting forces.  
 Special tool geometry for high feed rate and heavy cutting.  
 Strong end tooth design for plunge and pocket milling.  
 Custom engineered coating to allow long tool life and excellent chip evacuation.

▶ 4 FLUTE




▶ 5 FLUTE




**CHIP THICKNESS AND SHAPE**

▶ Conventional Roughing End Mills

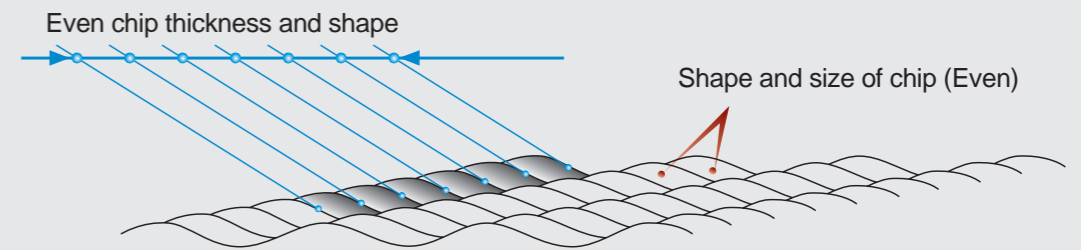

▶ X-SPEED Rougher

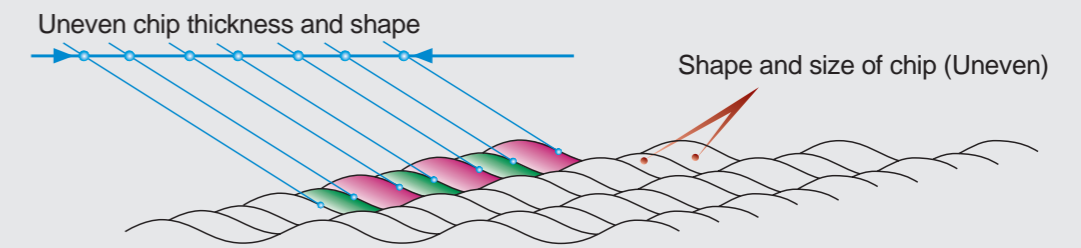








Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

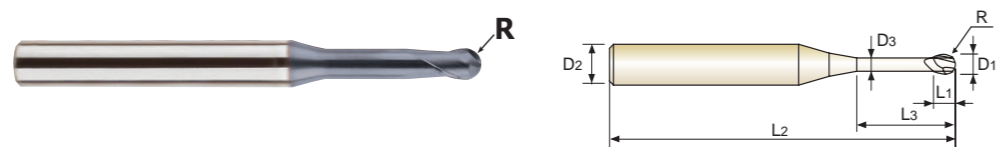

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>3</sub>	L <sub>2</sub>	D <sub>3</sub>
SEM846001002E	R0.05	0.1	4	0.1	0.2	40	0.085
SEM846001003E	R0.05	0.1	4	0.1	0.3	40	0.085
SEM846001005E	R0.05	0.1	4	0.1	0.5	40	0.085
SEM84600101E	R0.05	0.1	4	0.1	1	40	0.085
★ SEM846002005E	R0.1	0.2	4	0.2	0.5	40	0.17
★ SEM84600201E	R0.1	0.2	4	0.2	1	40	0.17
SEM846002015E	R0.1	0.2	4	0.2	1.5	40	0.17
★ SEM84600202E	R0.1	0.2	4	0.2	2	40	0.17
SEM84600203E	R0.1	0.2	4	0.2	3	40	0.17
★ SEM84600301E	R0.15	0.3	4	0.3	1	40	0.27
★ SEM846003015E	R0.15	0.3	4	0.3	1.5	40	0.27
★ SEM84600302E	R0.15	0.3	4	0.3	2	40	0.27
SEM846003025E	R0.15	0.3	4	0.3	2.5	40	0.27
★ SEM84600303E	R0.15	0.3	4	0.3	3	40	0.27
★ SEM84600304E	R0.15	0.3	4	0.3	4	40	0.27
SEM84600305E	R0.15	0.3	4	0.3	5	40	0.27
★ SEM84600401E	R0.2	0.4	4	0.4	1	40	0.37
★ SEM846004015E	R0.2	0.4	4	0.4	1.5	40	0.37
★ SEM84600402E	R0.2	0.4	4	0.4	2	40	0.37
★ SEM846004025E	R0.2	0.4	4	0.4	2.5	40	0.37
★ SEM84600403E	R0.2	0.4	4	0.4	3	40	0.37
★ SEM84600404E	R0.2	0.4	4	0.4	4	40	0.37
★ SEM84600405E	R0.2	0.4	4	0.4	5	40	0.37
★ SEM84600406E	R0.2	0.4	4	0.4	6	40	0.37

★ : Stock Item

▶ NEXT PAGE


Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

ISO Material Description	P											M		K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel	Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

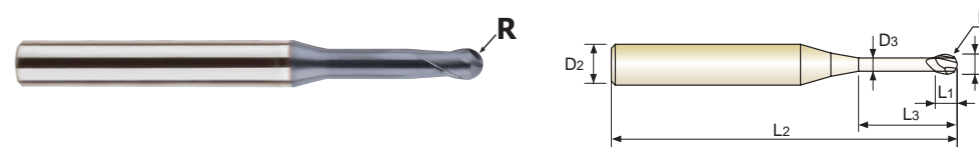

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>3</sub>	L <sub>2</sub>	D <sub>3</sub>
SEM84600408E	R0.2	0.4	4	0.4	8	40	0.37
SEM84600410E	R0.2	0.4	4	0.4	10	40	0.37
★ SEM84600501E	R0.25	0.5	4	0.5	1	45	0.45
SEM846005015E	R0.25	0.5	4	0.5	1.5	45	0.45
★ SEM84600502E	R0.25	0.5	4	0.5	2	45	0.45
SEM846005025E	R0.25	0.5	4	0.5	2.5	45	0.45
★ SEM84600503E	R0.25	0.5	4	0.5	3	45	0.45
★ SEM84600504E	R0.25	0.5	4	0.5	4	45	0.45
★ SEM84600505E	R0.25	0.5	4	0.5	5	45	0.45
★ SEM84600506E	R0.25	0.5	4	0.5	6	45	0.45
★ SEM84600508E	R0.25	0.5	4	0.5	8	45	0.45
★ SEM84600510E	R0.25	0.5	4	0.5	10	45	0.45
SEM84600512E	R0.25	0.5	4	0.5	12	45	0.45
SEM84600514E	R0.25	0.5	4	0.5	14	45	0.45
SEM84600516E	R0.25	0.5	4	0.5	16	45	0.45
★ SEM84600601E	R0.3	0.6	4	0.6	1	45	0.55
★ SEM84600602E	R0.3	0.6	4	0.6	2	45	0.55
★ SEM84600603E	R0.3	0.6	4	0.6	3	45	0.55
★ SEM84600604E	R0.3	0.6	4	0.6	4	45	0.55
★ SEM84600605E	R0.3	0.6	4	0.6	5	45	0.55
★ SEM84600606E	R0.3	0.6	4	0.6	6	45	0.55
★ SEM84600608E	R0.3	0.6	4	0.6	8	45	0.55
★ SEM84600610E	R0.3	0.6	4	0.6	10	45	0.55
★ SEM84600612E	R0.3	0.6	4	0.6	12	45	0.55

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	


ISO Material Description	P											M		K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel	Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○



Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

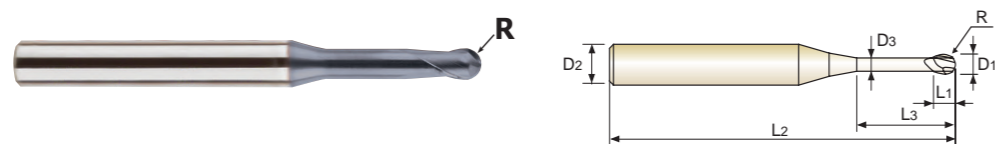

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM84600614E	R0.3	0.6	4	0.6	14	45	0.55
SEM84600616E	R0.3	0.6	4	0.6	16	45	0.55
★ SEM84600702E	R0.35	0.7	4	0.7	2	45	0.65
★ SEM84600704E	R0.35	0.7	4	0.7	4	45	0.65
★ SEM84600706E	R0.35	0.7	4	0.7	6	45	0.65
SEM84600708E	R0.35	0.7	4	0.7	8	45	0.65
SEM84600710E	R0.35	0.7	4	0.7	10	45	0.65
SEM84600712E	R0.35	0.7	4	0.7	12	45	0.65
SEM84600801E	R0.4	0.8	4	0.8	1	45	0.75
★ SEM84600802E	R0.4	0.8	4	0.8	2	45	0.75
★ SEM84600803E	R0.4	0.8	4	0.8	3	45	0.75
★ SEM84600804E	R0.4	0.8	4	0.8	4	45	0.75
★ SEM84600805E	R0.4	0.8	4	0.8	5	45	0.75
★ SEM84600806E	R0.4	0.8	4	0.8	6	45	0.75
★ SEM84600808E	R0.4	0.8	4	0.8	8	45	0.75
★ SEM84600810E	R0.4	0.8	4	0.8	10	45	0.75
★ SEM84600812E	R0.4	0.8	4	0.8	12	45	0.75
SEM84600814E	R0.4	0.8	4	0.8	14	45	0.75
SEM84600816E	R0.4	0.8	4	0.8	16	45	0.75
SEM84600820E	R0.4	0.8	4	0.8	20	45	0.75
★ SEM84600904E	R0.45	0.9	4	0.9	4	45	0.85
SEM84600906E	R0.45	0.9	4	0.9	6	45	0.85
★ SEM84600908E	R0.45	0.9	4	0.9	8	45	0.85
★ SEM84600910E	R0.45	0.9	4	0.9	10	45	0.85

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	


◎ : Excellent ○ : Good

ISO Material Description	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
HRC	125	130	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	21
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

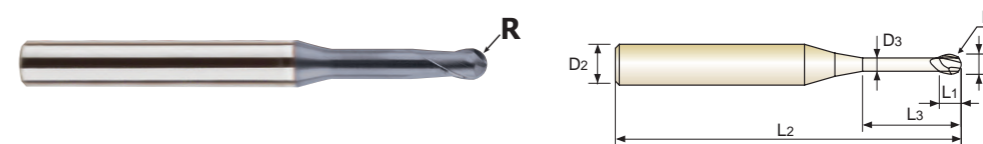

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84601002E	R0.5	1.0	4	1	2	50	0.95
★ SEM84601003E	R0.5	1.0	4	1	3	50	0.95
★ SEM84601004E	R0.5	1.0	4	1	4	50	0.95
★ SEM84601005E	R0.5	1.0	4	1	5	50	0.95
★ SEM84601006E	R0.5	1.0	4	1	6	50	0.95
★ SEM84601007E	R0.5	1.0	4	1	7	50	0.95
★ SEM84601008E	R0.5	1.0	4	1	8	50	0.95
SEM84601009E	R0.5	1.0	4	1	9	50	0.95
★ SEM84601010E	R0.5	1.0	4	1	10	50	0.95
★ SEM84601012E	R0.5	1.0	4	1	12	50	0.95
★ SEM84601014E	R0.5	1.0	4	1	14	50	0.95
★ SEM84601016E	R0.5	1.0	4	1	16	50	0.95
★ SEM84601018E	R0.5	1.0	4	1	18	50	0.95
★ SEM84601020E	R0.5	1.0	4	1	20	50	0.95
SEM84601022E	R0.5	1.0	4	1	22	60	0.95
★ SEM84601026E	R0.5	1.0	4	1	26	60	0.95
★ SEM84601030E	R0.5	1.0	4	1	30	70	0.95
SEM84601040E	R0.5	1.0	4	1	40	80	0.95
SEM84601050E	R0.5	1.0	4	1	50	100	0.95
★ SEM84601204E	R0.6	1.2	4	1.2	4	50	1.15
★ SEM84601206E	R0.6	1.2	4	1.2	6	50	1.15
★ SEM84601208E	R0.6	1.2	4	1.2	8	50	1.15
★ SEM84601210E	R0.6	1.2	4	1.2	10	50	1.15
★ SEM84601212E	R0.6	1.2	4	1.2	12	50	1.15

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
HRC	125	130	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	21
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○






## Y-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

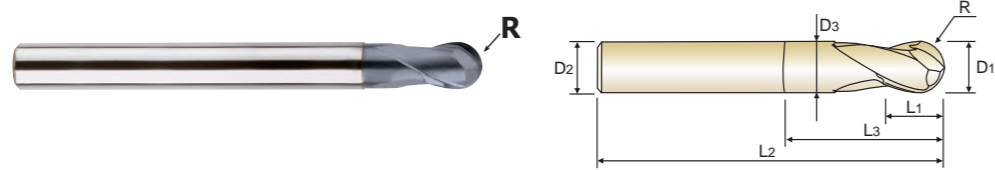

CARBIDE 2 30° R R PLAIN P.120-131  
 R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>3</sub>	L <sub>2</sub>	D <sub>3</sub>
★ SEM84604040E	R2.0	4.0	6	4	40	80	3.85
SEM84604045E	R2.0	4.0	6	4	45	90	3.85
★ SEM84604050E	R2.0	4.0	6	4	50	100	3.85
SEM84604055E	R2.0	4.0	6	4	55	100	3.85
SEM84604060E	R2.0	4.0	6	4	60	100	3.85
SEM84605015E	R2.5	5.0	6	6	15	60	4.85
★ SEM84605020E	R2.5	5.0	6	6	20	60	4.85
★ SEM84605026E	R2.5	5.0	6	6	26	65	4.85
★ SEM84605030E	R2.5	5.0	6	6	30	70	4.85
★ SEM84605035E	R2.5	5.0	6	6	35	70	4.85
★ SEM84605040E	R2.5	5.0	6	6	40	80	4.85
SEM84605045E	R2.5	5.0	6	6	45	90	4.85
★ SEM84605050E	R2.5	5.0	6	6	50	100	4.85
SEM84605055E	R2.5	5.0	6	6	55	100	4.85
SEM84605060E	R2.5	5.0	6	6	60	100	4.85
★ SEM84606020E	R3.0	6.0	6	8	20	60	5.85
★ SEM84606030E	R3.0	6.0	6	8	30	60	5.85
★ SEM84606020090E	R3.0	6.0	6	12	20	90	5.85
★ SEM84606030090E	R3.0	6.0	6	12	30	90	5.85
★ SEM84608025E	R4.0	8.0	8	10	25	70	7.70
★ SEM84608035E	R4.0	8.0	8	10	35	70	7.70
SEM84608025100E	R4.0	8.0	8	14	25	100	7.70
★ SEM84608035100E	R4.0	8.0	8	14	35	100	7.70
★ SEM84610030E	R5.0	10.0	10	12	30	75	9.70

★ : Stock Item

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	10	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

## Y-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE with EXTENDED NECK

SEM846 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

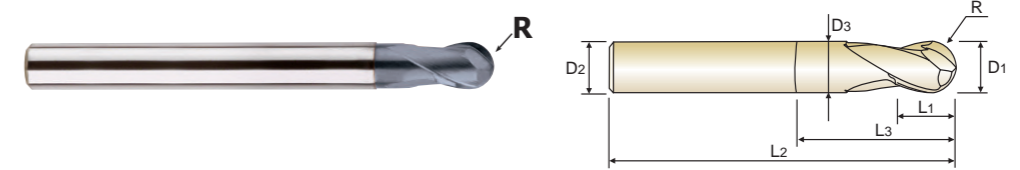

CARBIDE 2 30° R R PLAIN P.120-131  
 R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>3</sub>	L <sub>2</sub>	D <sub>3</sub>
★ SEM84610040E	R5.0	10.0	10	12	40	75	9.70
★ SEM84610030100E	R5.0	10.0	10	18	30	100	9.70
★ SEM84610040100E	R5.0	10.0	10	18	40	100	9.70
★ SEM84612032E	R6.0	12.0	12	14	32	80	11.70
SEM84612045E	R6.0	12.0	12	14	45	80	11.70
★ SEM84612032110E	R6.0	12.0	12	22	32	110	11.70
★ SEM84612045110E	R6.0	12.0	12	22	45	110	11.70

★ : Stock Item

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	10	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○	○












## Y-COATED SOLID CARBIDE END MILLS

### 2 FLUTE CORNER RADIUS (Short, Regular, Long Shank)

SEMD99 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in short, regular and long shank end mills.
- ▶ Available with various corner radius end mills, from 0.02mm to 5.0mm corner radius.

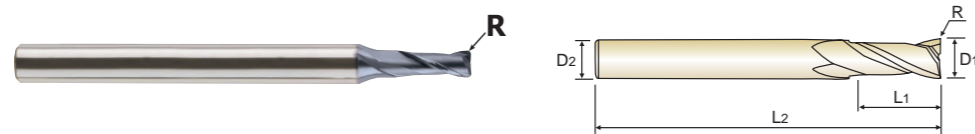

**CARBIDE** 2 **30°** **±0.010** **±0.015** **PLAIN** P.132-133

00.2-06 07-020

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	
SEMD9908003070E	R0.3	8.0	8	20	70	Short
★ SEMD9908005070E	R0.5	8.0	8	20	70	Short
★ SEMD9908010070E	R1.0	8.0	8	20	70	Short
SEMD99080001E	R0.1	8.0	8	20	100	Regular
SEMD99080002E	R0.2	8.0	8	20	100	Regular
SEMD99080003E	R0.3	8.0	8	20	100	Regular
★ SEMD99080005E	R0.5	8.0	8	20	100	Regular
★ SEMD9908010E	R1.0	8.0	8	20	100	Regular
★ SEMD9908015E	R1.5	8.0	8	20	100	Regular
★ SEMD9908020E	R2.0	8.0	8	20	100	Regular
SEMD9908025E	R2.5	8.0	8	20	100	Regular
SEMD9908030E	R3.0	8.0	8	20	100	Regular
SEMD9908005120E	R0.5	8.0	8	20	120	Long
SEMD9908010120E	R1.0	8.0	8	20	120	Long
SEMD9908015150E	R0.5	8.0	8	20	150	Long
SEMD9908010150E	R1.0	8.0	8	20	150	Long
SEMD9910003075E	R0.3	10.0	10	25	75	Short
★ SEMD9910005075E	R0.5	10.0	10	25	75	Short
★ SEMD9910010075E	R1.0	10.0	10	25	75	Short
SEMD9910001E	R0.1	10.0	10	25	100	Regular
SEMD9910002E	R0.2	10.0	10	25	100	Regular
SEMD9910003E	R0.3	10.0	10	25	100	Regular
★ SEMD9910005E	R0.5	10.0	10	25	100	Regular
★ SEMD9910010E	R1.0	10.0	10	25	100	Regular

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	35	20	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## Y-COATED SOLID CARBIDE END MILLS

### 2 FLUTE CORNER RADIUS (Short, Regular, Long Shank)

SEMD99 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in short, regular and long shank end mills.
- ▶ Available with various corner radius end mills, from 0.02mm to 5.0mm corner radius.

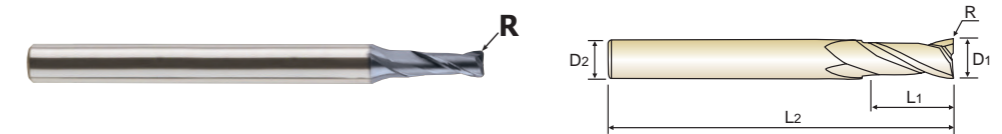

**CARBIDE** 2 **30°** **±0.010** **±0.015** **PLAIN** P.132-133

00.2-06 07-020

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D <sub>1</sub>	D <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	
★ SEMD9910015E	R1.5	10.0	10	25	100	Regular
★ SEMD9910020E	R2.0	10.0	10	25	100	Regular
SEMD9910025E	R2.5	10.0	10	25	100	Regular
SEMD9910030E	R3.0	10.0	10	25	100	Regular
SEMD9910040E	R4.0	10.0	10	25	100	Regular
SEMD9910005130E	R0.5	10.0	10	25	130	Long
SEMD9910010130E	R1.0	10.0	10	25	130	Long
SEMD9910005150E	R0.5	10.0	10	25	150	Long
SEMD9910010150E	R1.0	10.0	10	25	150	Long
SEMD9911002E	R0.2	11.0	12	25	110	-
SEMD9911003E	R0.3	11.0	12	25	110	-
SEMD9911005E	R0.5	11.0	12	25	110	-
SEMD9911010E	R1.0	11.0	12	25	110	-
SEMD9911020E	R2.0	11.0	12	25	110	-
SEMD9912003080E	R0.3	12.0	12	30	80	Short
★ SEMD9912005080E	R0.5	12.0	12	30	80	Short
★ SEMD9912010080E	R1.0	12.0	12	30	80	Short
SEMD9912001E	R0.1	12.0	12	30	110	Regular
SEMD9912002E	R0.2	12.0	12	30	110	Regular
SEMD9912003E	R0.3	12.0	12	30	110	Regular
★ SEMD9912005E	R0.5	12.0	12	30	110	Regular
★ SEMD9912010E	R1.0	12.0	12	30	110	Regular
★ SEMD9912015E	R1.5	12.0	12	30	110	Regular
★ SEMD9912020E	R2.0	12.0	12	30	110	Regular

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	35	20	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



Y-COATED SOLID CARBIDE END MILLS
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

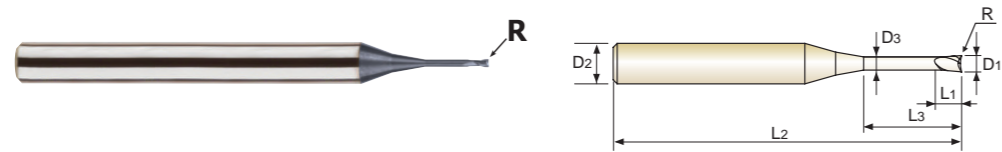

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances (±0.010, ±0.015), PLAIN, and P.134-141.

Table with columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME61 end mill specifications.


Table with columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Shows tolerances for up to Ø6 and over Ø6.

ISO material compatibility table for SEME61 series, showing suitability for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, etc.

Y-COATED SOLID CARBIDE END MILLS
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

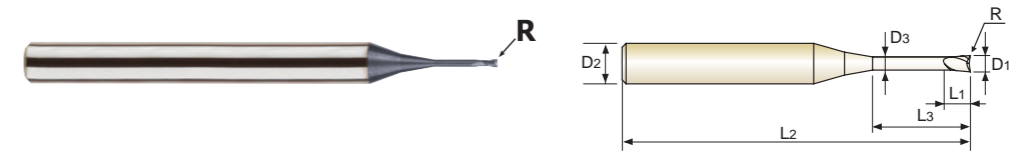

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances (±0.010, ±0.015), PLAIN, and P.134-141.

Table with columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME61 end mill specifications.

Table with columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Shows tolerances for up to Ø6 and over Ø6.


ISO material compatibility table for SEME61 series, showing suitability for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, etc.



Y-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

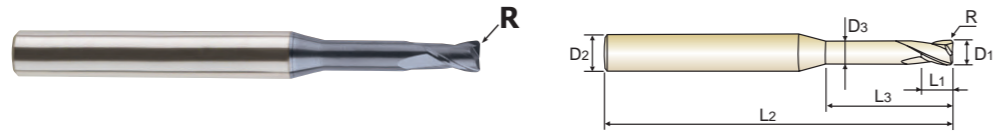

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances (±0.010, ±0.015), PLAIN, and P.134-141.

Ø0.2-Ø6 Ø7-Ø20

Unit : mm

Table with columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME61 series end mill models.

★ : Stock Item

▶ NEXT PAGE

Table with columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values for up to Ø6 and over Ø6.


◎ : Excellent ○ : Good

Material compatibility chart showing ISO descriptions and material groups (P, M, K, N, S, H) with recommendation symbols.

Y-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

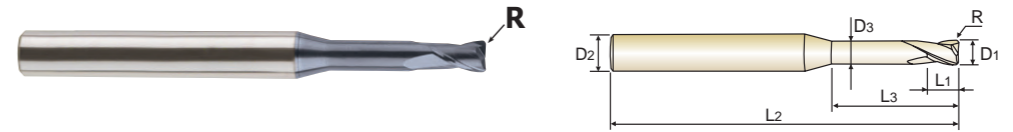

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances (±0.010, ±0.015), PLAIN, and P.134-141.

Ø0.2-Ø6 Ø7-Ø20

Unit : mm

Table with columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME61 series end mill models.

★ : Stock Item

▶ NEXT PAGE

Table with columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Values for up to Ø6 and over Ø6.



◎ : Excellent ○ : Good

Material compatibility chart showing ISO descriptions and material groups (P, M, K, N, S, H) with recommendation symbols.

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- ▶ Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available various products like regular length and long shank end mills etc.
- ▶ Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
- ▶ Available more various effective length and overall length end mills than previous standard products.



Ø0.2-Ø6 Ø7-Ø20

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME610120320E	R0.3	1.2	4	1.8	20	50	1.15	-
★ SEME6101500504E	R0.05	1.5	4	2.3	4	50	1.45	-
★ SEME6101500506E	R0.05	1.5	4	2.3	6	50	1.45	-
★ SEME6101500508E	R0.05	1.5	4	2.3	8	50	1.45	-
SEME6101500510E	R0.05	1.5	4	2.3	10	50	1.45	-
SEME6101500512E	R0.05	1.5	4	2.3	12	50	1.45	-
SEME6101500514E	R0.05	1.5	4	2.3	14	50	1.45	-
SEME6101500516E	R0.05	1.5	4	2.3	16	50	1.45	-
SEME6101500520E	R0.05	1.5	4	2.3	20	50	1.45	-
SEME6101500522E	R0.05	1.5	4	2.3	22	60	1.45	-
SEME6101500526E	R0.05	1.5	4	2.3	26	60	1.45	-
★ SEME610150104E	R0.1	1.5	4	2.3	4	50	1.45	-
★ SEME610150106E	R0.1	1.5	4	2.3	6	50	1.45	-
★ SEME610150108E	R0.1	1.5	4	2.3	8	50	1.45	-
★ SEME610150110E	R0.1	1.5	4	2.3	10	50	1.45	-
★ SEME610150112E	R0.1	1.5	4	2.3	12	50	1.45	-
SEME610150114E	R0.1	1.5	4	2.3	14	50	1.45	-
SEME610150116E	R0.1	1.5	4	2.3	16	50	1.45	-
SEME610150120E	R0.1	1.5	4	2.3	20	50	1.45	-
SEME610150122E	R0.1	1.5	4	2.3	22	60	1.45	-
SEME610150126E	R0.1	1.5	4	2.3	26	60	1.45	-
★ SEME610150204E	R0.2	1.5	4	2.3	4	50	1.45	-
★ SEME610150206E	R0.2	1.5	4	2.3	6	50	1.45	-
★ SEME610150208E	R0.2	1.5	4	2.3	8	50	1.45	-

★ : Stock Item

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	


◎ : Excellent ○ : Good

ISO Material Description	P										M					K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC	13	25	28	32	10	29	32	38	35	15	35	23	10	10	26	3	25	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- ▶ Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available various products like regular length and long shank end mills etc.
- ▶ Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
- ▶ Available more various effective length and overall length end mills than previous standard products.



Ø0.2-Ø6 Ø7-Ø20

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME610150210E	R0.2	1.5	4	2.3	10	50	1.45	-
★ SEME610150212E	R0.2	1.5	4	2.3	12	50	1.45	-
★ SEME610150214E	R0.2	1.5	4	2.3	14	50	1.45	-
★ SEME610150216E	R0.2	1.5	4	2.3	16	50	1.45	-
★ SEME610150220E	R0.2	1.5	4	2.3	20	50	1.45	-
SEME610150222E	R0.2	1.5	4	2.3	22	60	1.45	-
SEME610150226E	R0.2	1.5	4	2.3	26	60	1.45	-
★ SEME610150304E	R0.3	1.5	4	2.3	4	50	1.45	-
★ SEME610150306E	R0.3	1.5	4	2.3	6	50	1.45	-
★ SEME610150308E	R0.3	1.5	4	2.3	8	50	1.45	-
★ SEME610150310E	R0.3	1.5	4	2.3	10	50	1.45	-
★ SEME610150312E	R0.3	1.5	4	2.3	12	50	1.45	-
★ SEME610150314E	R0.3	1.5	4	2.3	14	50	1.45	-
★ SEME610150316E	R0.3	1.5	4	2.3	16	50	1.45	-
SEME610150320E	R0.3	1.5	4	2.3	20	50	1.45	-
SEME610150322E	R0.3	1.5	4	2.3	22	60	1.45	-
SEME610150326E	R0.3	1.5	4	2.3	26	60	1.45	-
★ SEME610150504E	R0.5	1.5	4	2.3	4	50	1.45	-
★ SEME610150506E	R0.5	1.5	4	2.3	6	50	1.45	-
★ SEME610150508E	R0.5	1.5	4	2.3	8	50	1.45	-
★ SEME610150510E	R0.5	1.5	4	2.3	10	50	1.45	-
★ SEME610150512E	R0.5	1.5	4	2.3	12	50	1.45	-
SEME610150514E	R0.5	1.5	4	2.3	14	50	1.45	-
★ SEME610150516E	R0.5	1.5	4	2.3	16	50	1.45	-

★ : Stock Item

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M					K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC	13	25	28	32	10	29	32	38	35	15	35	23	10	10	26	3	25	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○	○	○








Y-COATED SOLID CARBIDE END MILLS
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

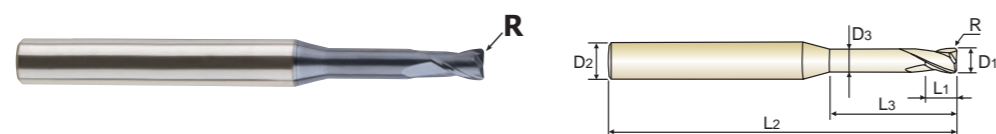

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances, PLAIN, and P.134-141.

00.2-06 07-020 Unit : mm

Table with 9 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Remark. Lists various SEME61 models.

★ : Stock Item

▶ NEXT PAGE


Table with 4 columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Shows tolerances for sizes up to and over 6mm.

ISO Material Recommendation table for SEME61 series, categorized by P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast, alloyed, Copper and Copper Alloys), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).

Y-COATED SOLID CARBIDE END MILLS
2 FLUTE CORNER RADIUS with EXTENDED NECK

SEME61 SERIES

- Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
Available various products like regular length and long shank end mills etc.
Available various corner radius end mills, from min. 0.02mm corner radius to max. 2.0mm corner radius.
Available more various effective length and overall length end mills than previous standard products.

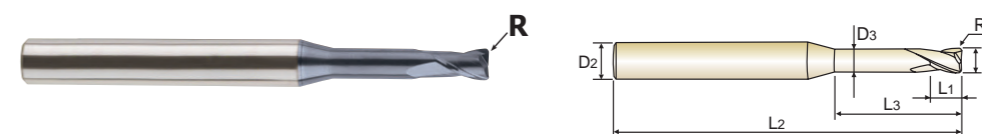

Icons for CARBIDE, 2 flutes, 30 degree angle, tolerances, PLAIN, and P.134-141.

00.2-06 07-020 Unit : mm

Table with 9 columns: EDP No., Corner Radius, Mill Diameter, Shank Diameter, Length of Cut, Length Below Shank, Overall Length, Neck Diameter, Remark. Lists various SEME61 models.

★ : Stock Item

▶ NEXT PAGE

Table with 4 columns: Size, Corner Radius Tolerance (mm), Mill Dia. Tolerance (mm), Shank Dia. Tolerance. Shows tolerances for sizes up to and over 6mm.

ISO Material Recommendation table for SEME61 series, categorized by P (Non-alloy steel, Low alloy steel, High alloyed steel), M (Stainless steel, Grey cast iron, Nodular cast iron, Malleable cast iron), N (Aluminum-wrought alloy, Aluminum-cast, alloyed, Copper and Copper Alloys), S (Heat Resistant Super Alloys, Titanium Alloys), H (Hardened steel, Chilled Cast Iron, Hardened Cast Iron).







Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

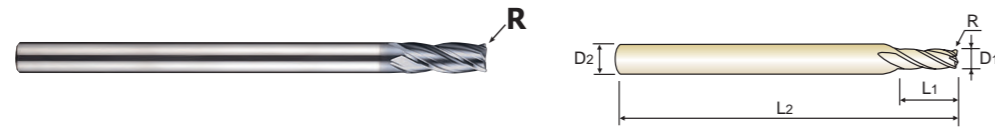

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME010100054SE	R0.05	1.0	4	2.5	50	4mm Shank
SEME01010014SE	R0.1	1.0	4	2.5	50	4mm Shank
SEME01010024SE	R0.2	1.0	4	2.5	50	4mm Shank
SEME01010034SE	R0.3	1.0	4	2.5	50	4mm Shank
SEME01010005E	R0.05	1.0	6	2.5	50	-
★ SEME0101001E	R0.1	1.0	6	2.5	50	-
SEME0101002E	R0.2	1.0	6	2.5	50	-
SEME0101003E	R0.3	1.0	6	2.5	50	-
SEME010120054SE	R0.05	1.2	4	3	50	4mm Shank
SEME01012014SE	R0.1	1.2	4	3	50	4mm Shank
SEME01012024SE	R0.2	1.2	4	3	50	4mm Shank
SEME01012034SE	R0.3	1.2	4	3	50	4mm Shank
SEME01012005E	R0.05	1.2	6	3	50	-
SEME0101201E	R0.1	1.2	6	3	50	-
SEME0101202E	R0.2	1.2	6	3	50	-
SEME0101203E	R0.3	1.2	6	3	50	-
SEME010150054SE	R0.05	1.5	4	4	50	4mm Shank
SEME01015014SE	R0.1	1.5	4	4	50	4mm Shank
SEME01015024SE	R0.2	1.5	4	4	50	4mm Shank
SEME01015034SE	R0.3	1.5	4	4	50	4mm Shank
SEME01015054SE	R0.5	1.5	4	4	50	4mm Shank
SEME01015005E	R0.05	1.5	6	4	50	-
SEME0101501E	R0.1	1.5	6	4	50	-
SEME0101502E	R0.2	1.5	6	4	50	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○



ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

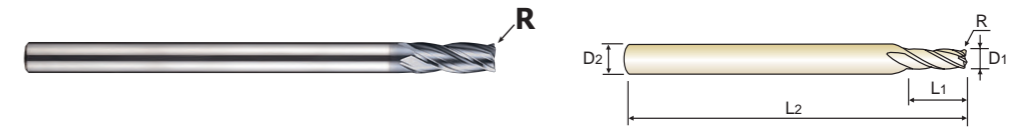

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0101503E	R0.3	1.5	6	4	50	-
SEME0101505E	R0.5	1.5	6	4	50	-
SEME01020014SE	R0.1	2.0	4	6	50	4mm Shank
SEME01020024SE	R0.2	2.0	4	6	50	4mm Shank
SEME01020034SE	R0.3	2.0	4	6	50	4mm Shank
SEME01020054SE	R0.5	2.0	4	6	50	4mm Shank
★ SEME0102001E	R0.1	2.0	6	6	50	-
★ SEME0102002E	R0.2	2.0	6	6	50	-
SEME0102003E	R0.3	2.0	6	6	50	-
SEME0102005E	R0.5	2.0	6	6	50	-
SEME01025014SE	R0.1	2.5	4	7	60	4mm Shank
SEME01025024SE	R0.2	2.5	4	7	60	4mm Shank
SEME01025034SE	R0.3	2.5	4	7	60	4mm Shank
SEME01025054SE	R0.5	2.5	4	7	60	4mm Shank
SEME0102501E	R0.1	2.5	6	7	60	-
SEME0102502E	R0.2	2.5	6	7	60	-
SEME0102503E	R0.3	2.5	6	7	60	-
SEME0102505E	R0.5	2.5	6	7	60	-
SEME0103001E	R0.1	3.0	6	8	60	-
★ SEME0103002E	R0.2	3.0	6	8	60	-
★ SEME0103003E	R0.3	3.0	6	8	60	-
★ SEME0103005E	R0.5	3.0	6	8	60	-
SEME0103010E	R1.0	3.0	6	8	60	-
SEME0103501E	R0.1	3.5	6	10	70	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○



ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

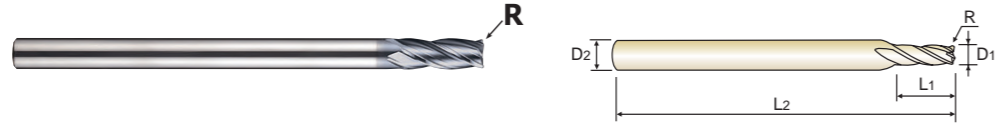

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0103502E	R0.2	3.5	6	10	70	-
SEME0103503E	R0.3	3.5	6	10	70	-
SEME0103505E	R0.5	3.5	6	10	70	-
SEME01040014SE	R0.1	4.0	4	10	70	4mm Shank
SEME01040024SE	R0.2	4.0	4	10	70	4mm Shank
SEME01040034SE	R0.3	4.0	4	10	70	4mm Shank
SEME01040054SE	R0.5	4.0	4	10	70	4mm Shank
SEME01040104SE	R1.0	4.0	4	10	70	4mm Shank
SEME01040011004SE	R0.1	4.0	4	10	100	4mm Shank
SEME01040021004SE	R0.2	4.0	4	10	100	4mm Shank
SEME01040031004SE	R0.3	4.0	4	10	100	4mm Shank
SEME01040051004SE	R0.5	4.0	4	10	100	4mm Shank
SEME01040101004SE	R1.0	4.0	4	10	100	4mm Shank
SEME0104001E	R0.1	4.0	6	10	70	Regular
★ SEME0104002E	R0.2	4.0	6	10	70	Regular
★ SEME0104003E	R0.3	4.0	6	10	70	Regular
★ SEME0104005E	R0.5	4.0	6	10	70	Regular
★ SEME0104010E	R1.0	4.0	6	10	70	Regular
SEME0104501E	R0.1	4.5	6	11	80	-
SEME0104502E	R0.2	4.5	6	11	80	-
SEME0104503E	R0.3	4.5	6	11	80	-
SEME0104505E	R0.5	4.5	6	11	80	-
SEME0105001E	R0.1	5.0	6	13	90	-
SEME0105002E	R0.2	5.0	6	13	90	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	45	15	23	25	28	10	26	3	25	10	21
HB	125	190	250	270	300	180	275	300	350	400	200	240	260	280	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

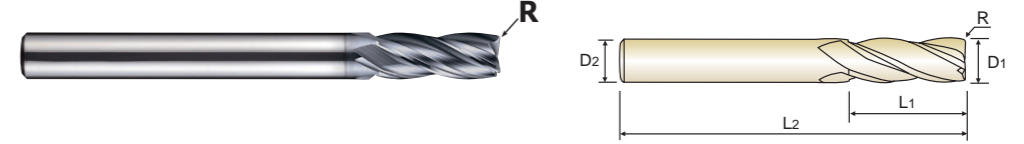

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
★ SEME0105003E	R0.3	5.0	6	13	90	-
★ SEME0105005E	R0.5	5.0	6	13	90	-
SEME0105010E	R1.0	5.0	6	13	90	-
SEME0105501E	R0.1	5.5	6	13	90	-
SEME0105502E	R0.2	5.5	6	13	90	-
SEME0105503E	R0.3	5.5	6	13	90	-
SEME0105505E	R0.5	5.5	6	13	90	-
SEME0105510E	R1.0	5.5	6	13	90	-
SEME0106001060E	R0.1	6.0	6	15	60	Short
SEME0106002060E	R0.2	6.0	6	15	60	Short
SEME0106001E	R0.1	6.0	6	15	90	Regular
★ SEME0106002E	R0.2	6.0	6	15	90	Regular
★ SEME0106003E	R0.3	6.0	6	15	90	Regular
★ SEME0106005E	R0.5	6.0	6	15	90	Regular
★ SEME0106010E	R1.0	6.0	6	15	90	Regular
SEME0106015E	R1.5	6.0	6	15	90	Regular
SEME0106020E	R2.0	6.0	6	15	90	Regular
SEME0106005110E	R0.5	6.0	6	15	110	Long
SEME0106010110E	R1.0	6.0	6	15	110	Long
SEME0106005130E	R0.5	6.0	6	15	130	Long
SEME0106010130E	R1.0	6.0	6	15	130	Long
SEME0107001E	R0.1	7.0	8	16	90	-
SEME0107002E	R0.2	7.0	8	16	90	-
SEME0107003E	R0.3	7.0	8	16	90	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	45	15	23	25	28	10	26	3	25	10	21
HB	125	190	250	270	300	180	275	300	350	400	200	240	260	280	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

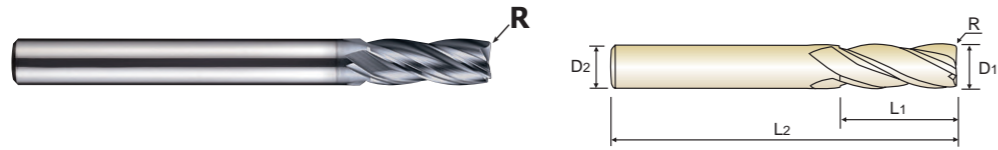

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0107005E	R0.5	7.0	8	16	90	-
SEME0107010E	R1.0	7.0	8	16	90	-
SEME0107020E	R2.0	7.0	8	16	90	-
★ SEME0108003070E	R0.3	8.0	8	20	70	Short
★ SEME0108005070E	R0.5	8.0	8	20	70	Short
★ SEME0108010070E	R1.0	8.0	8	20	70	Short
SEME0108001E	R0.1	8.0	8	20	100	Regular
★ SEME0108002E	R0.2	8.0	8	20	100	Regular
★ SEME0108003E	R0.3	8.0	8	20	100	Regular
★ SEME0108005E	R0.5	8.0	8	20	100	Regular
★ SEME0108010E	R1.0	8.0	8	20	100	Regular
★ SEME0108015E	R1.5	8.0	8	20	100	Regular
★ SEME0108020E	R2.0	8.0	8	20	100	Regular
SEME0108025E	R2.5	8.0	8	20	100	Regular
SEME0108030E	R3.0	8.0	8	20	100	Regular
SEME0108005120E	R0.5	8.0	8	20	120	Long
SEME0108010120E	R1.0	8.0	8	20	120	Long
SEME0108005150E	R0.5	8.0	8	20	150	Long
SEME0108010150E	R1.0	8.0	8	20	150	Long
SEME0110003075E	R0.3	10.0	10	25	75	Short
SEME0110005075E	R0.5	10.0	10	25	75	Short
SEME0110010075E	R1.0	10.0	10	25	75	Short
SEME0110001E	R0.1	10.0	10	25	100	Regular
SEME0110002E	R0.2	10.0	10	25	100	Regular

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	130	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS

4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)

SEME01 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

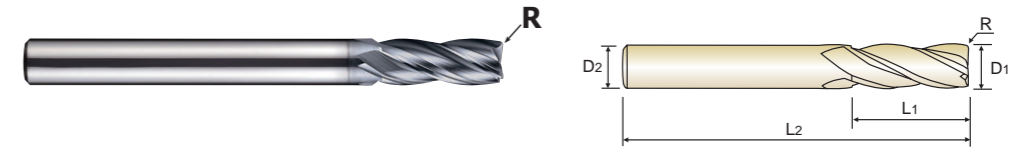

D<Ø3, 30°

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0110003E	R0.3	10.0	10	25	100	Regular
SEME0110005E	R0.5	10.0	10	25	100	Regular
★ SEME0110010E	R1.0	10.0	10	25	100	Regular
★ SEME0110015E	R1.5	10.0	10	25	100	Regular
★ SEME0110020E	R2.0	10.0	10	25	100	Regular
★ SEME0110025E	R2.5	10.0	10	25	100	Regular
SEME0110030E	R3.0	10.0	10	25	100	Regular
SEME0110040E	R4.0	10.0	10	25	100	Regular
SEME0110005130E	R0.5	10.0	10	22	130	Long
SEME0110010130E	R1.0	10.0	10	22	130	Long
SEME0110005150E	R0.5	10.0	10	22	150	Long
SEME0110010150E	R1.0	10.0	10	22	150	Long
★ SEME0111002E	R0.2	11.0	12	25	110	-
★ SEME0111003E	R0.3	11.0	12	25	110	-
SEME0111005E	R0.5	11.0	12	25	110	-
SEME0111010E	R1.0	11.0	12	25	110	-
SEME0111020E	R2.0	11.0	12	25	110	-
SEME0112003080E	R0.3	12.0	12	30	80	Short
SEME0112005080E	R0.5	12.0	12	30	80	Short
SEME0112010080E	R1.0	12.0	12	30	80	Short
SEME0112001E	R0.1	12.0	12	30	110	Regular
SEME0112002E	R0.2	12.0	12	30	110	Regular
SEME0112003E	R0.3	12.0	12	30	110	Regular
★ SEME0112005E	R0.5	12.0	12	30	110	Regular

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	130	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○













Y-COATED SOLID CARBIDE END MILLS
4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK SEME64 SERIES

- New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

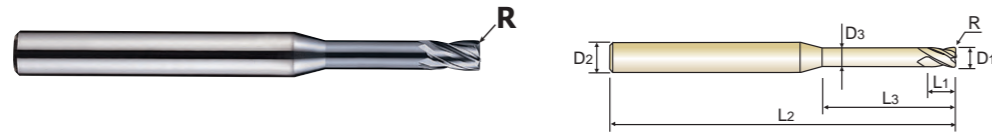

D<Ø3, 30°

Table with 9 columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME64 models with specifications.

★ : Stock Item

▶ NEXT PAGE


Table with 3 columns: Corner Radius Tolerance (mm) ±0.02, Mill Dia. Tolerance (mm) 0 ~ -0.03, Shank Dia. Tolerance h5.

◎ : Excellent ○ : Good

Material compatibility chart for SEME64 series, showing ISO grades and material types like Non-alloy steel, Low alloy steel, High alloyed steel, etc.

Y-COATED SOLID CARBIDE END MILLS
4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK SEME64 SERIES

- New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

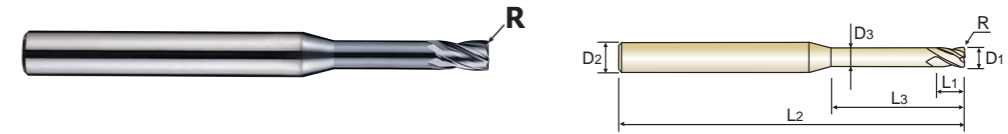

D<Ø3, 30°

Table with 9 columns: EDP No., Corner Radius (R), Mill Diameter (D1), Shank Diameter (D2), Length of Cut (L1), Length Below Shank (L3), Overall Length (L2), Neck Diameter (D3), Remark. Lists various SEME64 models with specifications.

★ : Stock Item

▶ NEXT PAGE

Table with 3 columns: Corner Radius Tolerance (mm) ±0.02, Mill Dia. Tolerance (mm) 0 ~ -0.03, Shank Dia. Tolerance h5.

◎ : Excellent ○ : Good

Material compatibility chart for SEME64 series, showing ISO grades and material types like Non-alloy steel, Low alloy steel, High alloyed steel, etc.







Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE

**SEME35** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ From a sharp edge geometry at the end tooth, cutting abilities at work process is increased.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME35001E	0.1	4	0.2	40
★ SEME350015E	0.15	4	0.3	40
★ SEME35002E	0.2	4	0.4	40
SEME350025E	0.25	4	0.5	40
★ SEME35003E	0.3	4	0.6	40
SEME350035E	0.35	4	0.7	40
★ SEME35004E	0.4	4	0.8	40
SEME350045E	0.45	4	0.9	40
★ SEME35005E	0.5	4	1.0	40
SEME350055E	0.55	4	1.1	40
★ SEME35006E	0.6	4	1.2	40
SEME350065E	0.65	4	1.3	40
★ SEME35007E	0.7	4	1.4	40
SEME350075E	0.75	4	1.5	40
★ SEME35008E	0.8	4	1.6	40
SEME350085E	0.85	4	1.7	40
★ SEME35009E	0.9	4	1.8	40
SEME350095E	0.95	4	2	40
★ SEME35010E	1.0	6	2.5	50
★ SEME35012E	1.2	6	3	50
★ SEME35015E	1.5	6	4	50
★ SEME35020E	2.0	6	6	50
★ SEME35025E	2.5	6	7	50
★ SEME35030E	3.0	6	8	50

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0~ - 0.012	h5
over Ø6	0~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	10	10	26	3	25	3	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE

**SEME35** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ From a sharp edge geometry at the end tooth, cutting abilities at work process is increased.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME35035E	3.5	6	10	50
★ SEME35040E	4.0	6	10	50
★ SEME35045E	4.5	6	14	50
★ SEME35050E	5.0	6	15	60
★ SEME35055E	5.5	6	15	60
★ SEME35060E	6.0	6	15	60
★ SEME35065E	6.5	8	18	60
★ SEME35070E	7.0	8	20	60
★ SEME35075E	7.5	8	20	60
★ SEME35080E	8.0	8	20	70
★ SEME35085E	8.5	10	22	70
★ SEME35090E	9.0	10	22	70
★ SEME35095E	9.5	10	24	70
★ SEME35100E	10.0	10	25	75
★ SEME35105E	10.5	12	26	75
★ SEME35110E	11.0	12	30	75
SEME35115E	11.5	12	30	80
★ SEME35120E	12.0	12	30	80
★ SEME35130E	13.0	12	35	100
SEME3514012SE	14.0	12	35	100
★ SEME3514014SE	14.0	14	35	100
★ SEME35140E	14.0	16	35	100
★ SEME35150E	15.0	16	38	100
★ SEME35160E	16.0	16	40	100

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0~ - 0.012	h5
over Ø6	0~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	10	10	26	3	25	3	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE**

**SEME35** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ From a sharp edge geometry at the end tooth, cutting abilities at work process is increased.

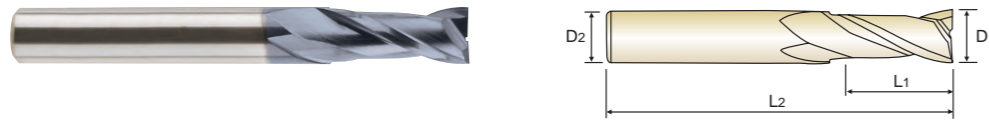

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
SEME35170E	17.0	16	42	100
★ SEME35180E	18.0	16	45	100
SEME3518018SE	18.0	18	45	100
SEME35190E	19.0	20	45	100
★ SEME35200E	20.0	20	45	100
SEME35210E	21.0	20	45	100
SEME35220E	22.0	20	45	100
SEME35230E	23.0	25	50	120
SEME35240E	24.0	25	50	120
SEME35250E	25.0	25	50	120

★ : Stock Item

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0~ - 0.012	h5
over Ø6	0~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

**Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE (4mm Shank)**

**SEME35** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ From a sharp edge geometry at the end tooth, cutting abilities at work process is increased.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME350104SE	1.0	4	2.5	50
★ SEME350114SE	1.1	4	3	50
★ SEME350124SE	1.2	4	3	50
★ SEME350134SE	1.3	4	3	50
★ SEME350144SE	1.4	4	4	50
★ SEME350154SE	1.5	4	4	50
★ SEME350164SE	1.6	4	4	50
★ SEME350174SE	1.7	4	4	50
★ SEME350184SE	1.8	4	5	50
★ SEME350194SE	1.9	4	5	50
★ SEME350204SE	2.0	4	6	50
SEME350214SE	2.1	4	6	50
★ SEME350224SE	2.2	4	6	50
★ SEME350234SE	2.3	4	6	50
★ SEME350244SE	2.4	4	6	50
★ SEME350254SE	2.5	4	8	50
★ SEME350264SE	2.6	4	8	50
★ SEME350274SE	2.7	4	8	50
★ SEME350284SE	2.8	4	8	50
SEME350294SE	2.9	4	8	50
★ SEME350304SE	3.0	4	8	50
SEME350354SE	3.5	4	10	50
★ SEME350404SE	4.0	4	10	50
★ SEME350404S080E	4.0	4	10	80

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~ - 0.012	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○



Y-COATED SOLID CARBIDE END MILLS

2 FLUTE (3mm Shank)

SEME35 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ From a sharp edge geometry at the end tooth, cutting abilities at work process is increased.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME350013SE	0.1	3	0.2	40
★ SEME350023SE	0.2	3	0.4	40
★ SEME350033SE	0.3	3	0.6	40
★ SEME350043SE	0.4	3	0.8	40
★ SEME350053SE	0.5	3	1.0	40
★ SEME350063SE	0.6	3	1.2	40
★ SEME350073SE	0.7	3	1.4	40
★ SEME350083SE	0.8	3	1.6	40
★ SEME350093SE	0.9	3	1.8	40
★ SEME350103SE	1.0	3	2.5	50
★ SEME350123SE	1.2	3	3	50
★ SEME350153SE	1.5	3	4	50
★ SEME350203SE	2.0	3	6	50
★ SEME350253SE	2.5	3	7	50
★ SEME350303SE	3.0	3	8	50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~ - 0.012	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

Y-COATED SOLID CARBIDE END MILLS

2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7001003E	1.0	6	3	60
★ SEME7001004E	1.0	6	4	60
SEMSE7001005E	1.0	6	5	60
★ SEME7001006E	1.0	6	6	60
SEMSE7001007E	1.0	6	7	60
★ SEME7001008E	1.0	6	8	60
★ SEME7001010E	1.0	6	10	60
SEMSE7001012E	1.0	6	12	60
SEMSE7001204E	1.2	6	4	60
SEMSE7001206E	1.2	6	6	60
SEMSE7001208E	1.2	6	8	60
SEMSE7001210E	1.2	6	10	60
SEMSE7001212E	1.2	6	12	60
★ SEME7001506E	1.5	6	6	60
★ SEME7001508E	1.5	6	8	60
★ SEME7001510E	1.5	6	10	60
★ SEME7001512E	1.5	6	12	60
SEMSE7001514E	1.5	6	14	60
★ SEME7001516E	1.5	6	16	60
★ SEME7002008E	2.0	6	8	60
★ SEME7002010E	2.0	6	10	60
★ SEME7002012E	2.0	6	12	60
SEMSE7002014E	2.0	6	14	60
★ SEME7002016E	2.0	6	16	60

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7002510E	2.5	6	10	60
SEME7002512E	2.5	6	12	60
★ SEME7002516E	2.5	6	16	60
SEME7002520E	2.5	6	20	60
SEME7002526E	2.5	6	26	60
SEME70030163SE	3.0	3	16	100
★ SEME7003010E	3.0	6	10	70
★ SEME7003012E	3.0	6	12	70
★ SEME7003014E	3.0	6	14	70
★ SEME7003016E	3.0	6	16	70
★ SEME7003020E	3.0	6	20	70
★ SEME7003026E	3.0	6	26	70
SEME7003030E	3.0	6	30	70
SEME70040204SE	4.0	4	20	100
★ SEME7004012E	4.0	6	12	70
★ SEME7004016E	4.0	6	16	70
★ SEME7004020E	4.0	6	20	70
★ SEME7004026E	4.0	6	26	70
★ SEME7004030E	4.0	6	30	70
★ SEME7005020E	5.0	6	20	70
★ SEME7005025E	5.0	6	25	70
SEME7005025100E	5.0	6	25	100
★ SEME7005030E	5.0	6	30	80
SEME7005035E	5.0	6	35	90

★: Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎: Excellent ○: Good

ISO Material Description	P											M				K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	12	23	10	10	26	3	25	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7005040E	5.0	6	40	100
★ SEME7006015E	6.0	6	15	60
★ SEME7006015080E	6.0	6	15	80
★ SEME7006020E	6.0	6	20	70
★ SEME7006020090E	6.0	6	20	90
★ SEME7006025E	6.0	6	25	75
★ SEME7006030E	6.0	6	30	80
★ SEME7006030100E	6.0	6	30	100
★ SEME7006030150E	6.0	6	30	150
★ SEME7006035E	6.0	6	35	90
★ SEME7006040E	6.0	6	40	90
★ SEME7006040120E	6.0	6	40	120
★ SEME7006045E	6.0	6	45	150
★ SEME7008025E	8.0	8	25	80
★ SEME7008030E	8.0	8	30	80
★ SEME7008030100E	8.0	8	30	100
★ SEME7008035E	8.0	8	35	90
★ SEME7008040E	8.0	8	40	90
★ SEME7008040120E	8.0	8	40	120
SEME7008040150E	8.0	8	40	150
★ SEME7008045E	8.0	8	45	100
★ SEME7008050E	8.0	8	50	100
SEME7008050150E	8.0	8	50	150
★ SEME7010030E	10.0	10	30	80

★: Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎: Excellent ○: Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	12	23	10	10	26	3	25	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7010030100E	10.0	10	30	100
★ SEME7010035E	10.0	10	35	90
★ SEME7010040E	10.0	10	40	90
★ SEME7010040120E	10.0	10	40	120
★ SEME7010045E	10.0	10	45	100
★ SEME7010050E	10.0	10	50	100
★ SEME7010050150E	10.0	10	50	150
SEME7010050200E	10.0	10	50	200
SEME7010055E	10.0	10	55	150
★ SEME7010060E	10.0	10	60	110
SEME7010060200E	10.0	10	60	200
★ SEME7012035E	12.0	12	35	90
★ SEME7012040E	12.0	12	40	100
★ SEME7012040120E	12.0	12	40	120
★ SEME7012045E	12.0	12	45	130
★ SEME7012050E	12.0	12	50	100
★ SEME7012050150E	12.0	12	50	150
★ SEME7012055E	12.0	12	55	110
★ SEME7012060E	12.0	12	60	110
★ SEME7012060150E	12.0	12	60	150
SEME7012060200E	12.0	12	60	200
SEME7012065E	12.0	12	65	150
SEME7012070E	12.0	12	70	120
SEME7012070200E	12.0	12	70	200

★: Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

©: Excellent ○: Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
SEME7014050E	14.0	16	50	110
★ SEME7014060E	14.0	16	60	150
★ SEME7016040E	16.0	16	40	150
SEME7016050E	16.0	16	50	110
SEME7016050150E	16.0	16	50	150
SEME7016060E	16.0	16	60	120
SEME7016070E	16.0	16	70	130
★ SEME7016070150E	16.0	16	70	150
SEME7016070200E	16.0	16	70	200
SEME7016080E	16.0	16	80	150
SEME7016090E	16.0	16	90	150
SEME70160110E	16.0	16	110	200
SEME70160120E	16.0	16	120	250
SEME7018050E	18.0	20	50	120
SEME7018070E	18.0	20	70	130
SEME70180100E	18.0	20	100	200
SEME7020050E	20.0	20	50	110
SEME7020050150E	20.0	20	50	150
SEME7020060E	20.0	20	60	130
SEME7020070E	20.0	20	70	130
SEME7020080E	20.0	20	80	150
SEME7020090E	20.0	20	90	150
★ SEME7020090200E	20.0	20	90	200
★ SEME70200110E	20.0	20	110	200

★: Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

©: Excellent ○: Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH

SEME70 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Available in various lengths of cut and also overall lengths.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
SEME70200120E	20.0	20	120	250
SEME7022075E	22.0	20	75	150
SEME70220110E	22.0	20	110	200
SEME7025070E	25.0	25	70	150
SEME7025090E	25.0	25	90	150
SEME70250110E	25.0	25	110	200
SEME70250120E	25.0	25	120	250

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	130	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
2 FLUTE with EXTENDED NECK

SEM845 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ For 1.0mm and under 1.0mm diameter size products, it is designed with a double neck to increase tool rigidity and to minimize vibration.
- ▶ Available in several effective lengths of cut and also overall lengths to apply on various rib processing.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
SEM845001003E	0.1	4	0.15	0.3	40	0.085
★ SEM845001005E	0.1	4	0.15	0.5	40	0.085
SEM84500101E	0.1	4	0.15	1	40	0.085
SEM84500150035SE	0.15	4	0.2	0.35	40	0.13
★ SEM845002005E	0.2	4	0.3	0.5	40	0.17
★ SEM84500201E	0.2	4	0.3	1	40	0.17
★ SEM845002015E	0.2	4	0.3	1.5	40	0.17
★ SEM84500202E	0.2	4	0.3	2	40	0.17
★ SEM84500301E	0.3	4	0.5	1	40	0.27
★ SEM845003015E	0.3	4	0.5	1.5	40	0.27
★ SEM84500302E	0.3	4	0.5	2	40	0.27
SEM845003025E	0.3	4	0.5	2.5	40	0.27
★ SEM84500303E	0.3	4	0.5	3	40	0.27
★ SEM84500304E	0.3	4	0.5	4	40	0.27
SEM84500305E	0.3	4	0.5	5	40	0.27
★ SEM84500401E	0.4	4	0.6	1	40	0.37
★ SEM845004015E	0.4	4	0.6	1.5	40	0.37
★ SEM84500402E	0.4	4	0.6	2	40	0.37
★ SEM845004025E	0.4	4	0.6	2.5	40	0.37
★ SEM84500403E	0.4	4	0.6	3	40	0.37
★ SEM84500404E	0.4	4	0.6	4	40	0.37
★ SEM84500405E	0.4	4	0.6	5	40	0.37
SEM84500406E	0.4	4	0.6	6	40	0.37
SEM84500408E	0.4	4	0.6	8	40	0.37

★ : Stock Item

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0 - - 0.012	h5
over Ø6	0 - - 0.015	

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	130	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○











Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX

SEME36 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter end mills minimizing vibration and decreasing wear in cutting.



D<Ø3, 30°

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
SEME36008E	0.8	4	1.6	40	4mm Shank
SEME36009E	0.9	4	1.8	40	4mm Shank
SEME360104SE	1.0	4	2.5	50	4mm Shank
★ SEME36010E	1.0	6	2.5	50	-
SEME360124SE	1.2	4	3	50	4mm Shank
SEME36012E	1.2	6	3	50	-
SEME360154SE	1.5	4	4	50	4mm Shank
★ SEME36015E	1.5	6	4	50	-
SEME360204SE	2.0	4	6	50	4mm Shank
★ SEME36020E	2.0	6	6	50	-
SEME360254SE	2.5	4	7	50	4mm Shank
★ SEME36025E	2.5	6	7	50	-
★ SEME36030E	3.0	6	8	50	-
★ SEME36035E	3.5	6	10	50	-
★ SEME36040E	4.0	6	10	50	-
★ SEME36045E	4.5	6	14	50	-
★ SEME36050E	5.0	6	15	60	-
★ SEME36055E	5.5	6	15	60	-
★ SEME36060E	6.0	6	15	60	-
★ SEME36065E	6.5	8	18	60	-
★ SEME36070E	7.0	8	20	60	-
★ SEME36075E	7.5	8	20	60	-
★ SEME36080E	8.0	8	20	70	-
★ SEME36085E	8.5	10	22	70	-

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	35	20	23	10	10	26	17	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX

SEME36 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter end mills minimizing vibration and decreasing wear in cutting.



D<Ø3, 30°

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
★ SEME36090E	9.0	10	22	70	-
★ SEME36095E	9.5	10	24	70	-
★ SEME36100E	10.0	10	25	75	-
SEME36105E	10.5	12	26	75	-
★ SEME36110E	11.0	12	30	75	-
SEME36115E	11.5	12	30	80	-
★ SEME36120E	12.0	12	30	80	-
SEME36130E	13.0	12	35	100	-
SEME3614012SE	14.0	12	35	100	-
★ SEME3614014SE	14.0	14	35	100	-
★ SEME36140E	14.0	16	35	100	-
SEME36150E	15.0	16	38	100	-
★ SEME36160E	16.0	16	40	100	-
SEME36170E	17.0	16	42	100	-
★ SEME36180E	18.0	16	45	100	-
★ SEME3618018SE	18.0	18	45	100	-
SEME36190E	19.0	20	45	100	-
★ SEME36200E	20.0	20	45	100	-
SEME36210E	21.0	20	45	100	-
SEME36220E	22.0	20	45	100	-
SEME36230E	23.0	25	50	120	-
SEME36240E	24.0	25	50	120	-
SEME36250E	25.0	25	50	120	-

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	35	20	23	10	10	26	17	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX (Sharp Corner Removal)

SEME71 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
  - Equal index flutes design for long length and single helix (38°) end mills.
- ▶ Gash land geometry applied at the end tooth, achieving heavy duty cutting.
- ▶ Available various length products like short, regular and long length end mills etc.
- ▶ Available in short, regular and long shank end mills.

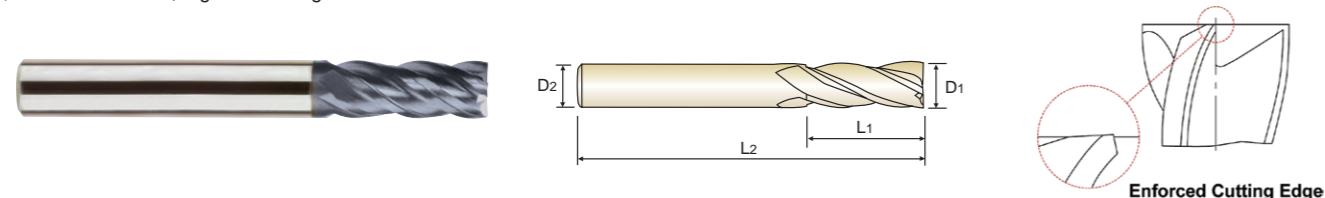

D<Ø3, Long Length 38°

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
SEME71010014SE	1.0	4	1	40	4mm Shank
SEME71010024SE	1.0	4	2	40	4mm Shank
SEME710104SE	1.0	4	2.5	50	4mm Shank
SEME71010034SE	1.0	4	3	50	4mm Shank
SEME71010044SE	1.0	4	4	50	4mm Shank
SEME71010064SE	1.0	4	6	50	4mm Shank
SEME7101001E	1.0	6	1	40	Short
SEME7101002E	1.0	6	2	40	Short
★ SEME71010E	1.0	6	2.5	50	Regular
SEME7101003E	1.0	6	3	50	Long
SEME7101004E	1.0	6	4	50	Long
SEME7101006E	1.0	6	6	50	Long
SEME71012024SE	1.2	4	2	40	4mm Shank
SEME710124SE	1.2	4	3	50	4mm Shank
SEME71012044SE	1.2	4	4	50	4mm Shank
SEME71012064SE	1.2	4	6	50	4mm Shank
SEME7101202E	1.2	6	2	40	Short
★ SEME71012E	1.2	6	3	50	Regular
SEME7101204E	1.2	6	4	50	Long
SEME7101206E	1.2	6	6	50	Long
SEME710150154SE	1.5	4	1.5	40	4mm Shank
SEME71015034SE	1.5	4	3	40	4mm Shank
SEME710154SE	1.5	4	4	50	4mm Shank
SEME71015064SE	1.5	4	6	50	4mm Shank

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

© : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	30	35	20	23	24	26	26	25	25	25	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N				S					H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed	Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX (Sharp Corner Removal)

SEME71 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
  - Equal index flutes design for long length and single helix (38°) end mills.
- ▶ Gash land geometry applied at the end tooth, achieving heavy duty cutting.
- ▶ Available various length products like short, regular and long length end mills etc.
- ▶ Available in short, regular and long shank end mills.

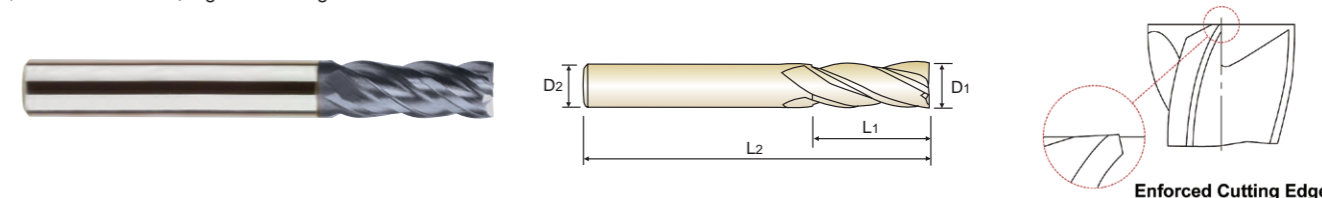

D<Ø3, Long Length 38°

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
SEME71015084SE	1.5	4	8	50	4mm Shank
SEME71015104SE	1.5	4	10	50	4mm Shank
SEME71015015E	1.5	6	1.5	40	Short
SEME7101503E	1.5	6	3	40	Short
★ SEME71015E	1.5	6	4	50	Regular
SEME7101506E	1.5	6	6	50	Long
SEME7101508E	1.5	6	8	50	Long
SEME7101510E	1.5	6	10	50	Long
SEME71020024SE	2.0	4	2	40	4mm Shank
SEME71020044SE	2.0	4	4	40	4mm Shank
SEME710204SE	2.0	4	6	50	4mm Shank
SEME71020084SE	2.0	4	8	50	4mm Shank
SEME71020104SE	2.0	4	10	50	4mm Shank
SEME71020124SE	2.0	4	12	50	4mm Shank
SEME7102002E	2.0	6	2	40	Short
SEME7102004E	2.0	6	4	40	Short
★ SEME71020E	2.0	6	6	50	Regular
SEME7102008E	2.0	6	8	50	Long
SEME7102010E	2.0	6	10	50	Long
SEME7102012E	2.0	6	12	50	Long
SEME710250254SE	2.5	4	2.5	40	4mm Shank
SEME71025054SE	2.5	4	5	40	4mm Shank
SEME710254SE	2.5	4	7	50	4mm Shank
SEME71025104SE	2.5	4	10	50	4mm Shank

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

© : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	30	35	20	23	24	26	26	25	25	25	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N				S					H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed	Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX (Sharp Corner Removal)

SEME71 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
  - Equal index flutes design for long length and single helix (38°) end mills.
- ▶ Gash land geometry applied at the end tooth, achieving heavy duty cutting.
- ▶ Available various length products like short, regular and long length end mills etc.
- ▶ Available in short, regular and long shank end mills.

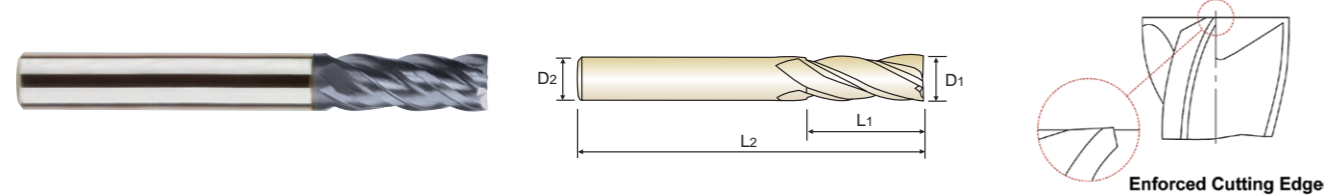

D<Ø3, Long Length 38°

Unit : mm

EDP No.	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Overall Length L2	Remark
SEME71025124SE	2.5	4	12	50	4mm Shank
SEME71025025E	2.5	6	2.5	40	Short
SEME7102505E	2.5	6	5	40	Short
★ SEME71025E	2.5	6	7	50	Regular
SEME7102510E	2.5	6	10	50	Long
SEME7102512E	2.5	6	12	50	Long
SEME7103003E	3.0	6	3	40	Short
SEME7103006E	3.0	6	6	40	Short
★ SEME71030E	3.0	6	8	50	Regular
SEME7103010E	3.0	6	10	50	Long
SEME7103012E	3.0	6	12	50	Long
SEME7103014E	3.0	6	14	50	Long
SEME7104004E	4.0	6	4	40	Short
SEME7104008E	4.0	6	8	40	Short
★ SEME71040E	4.0	6	10	50	Regular
SEME7104012E	4.0	6	12	50	Long
SEME7104014E	4.0	6	14	50	Long
SEME7104016E	4.0	6	16	50	Long
SEME7105005E	5.0	6	5	50	Short
SEME7105010E	5.0	6	10	50	Short
★ SEME71050E	5.0	6	15	60	Regular
SEME7105020E	5.0	6	20	60	Long
SEME7105025E	5.0	6	25	60	Long
SEME7106006E	6.0	6	6	50	Short

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N				S					H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE MULTIPLE HELIX (Sharp Corner Removal)

SEME71 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
  - Equal index flutes design for long length and single helix (38°) end mills.
- ▶ Gash land geometry applied at the end tooth, achieving heavy duty cutting.
- ▶ Available various length products like short, regular and long length end mills etc.
- ▶ Available in short, regular and long shank end mills.

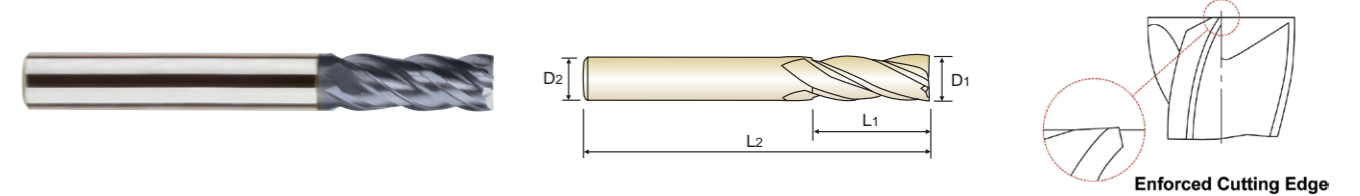

D<Ø3, Long Length 38°

Unit : mm

EDP No.	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Overall Length L2	Remark
SEME7106012E	6.0	6	12	50	Short
★ SEME71060E	6.0	6	15	60	Regular
SEME7106020E	6.0	6	20	60	Long
SEME7106025E	6.0	6	25	60	Long
SEME7108016E	8.0	8	16	60	Short
★ SEME71080E	8.0	8	20	70	Regular
SEME7108025E	8.0	8	25	70	Long
SEME7108030E	8.0	8	30	70	Long
★ SEME7110022E	10.0	10	22	65	Short
★ SEME71100E	10.0	10	25	75	Regular
★ SEME7110030E	10.0	10	30	75	Long
★ SEME7110035E	10.0	10	35	75	Long
SEME7112026E	12.0	12	26	70	Short
★ SEME71120E	12.0	12	30	80	Regular
★ SEME7112035E	12.0	12	35	80	Long
★ SEME7112040E	12.0	12	40	80	Long
SEME71140E	14.0	16	35	100	Regular
★ SEME7116032E	16.0	16	32	100	Short
★ SEME71160E	16.0	16	40	100	Regular
SEME71180E	18.0	20	45	100	Regular
★ SEME71200E	20.0	20	45	100	Regular

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



  

ISO Material Description	N				S					H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7201003E	1.0	6	3	60
★ SEME7201004E	1.0	6	4	60
★ SEME7201005E	1.0	6	5	60
★ SEME7201006E	1.0	6	6	60
SEME7201007E	1.0	6	7	60
★ SEME7201008E	1.0	6	8	60
SEME7201010E	1.0	6	10	60
SEME7201012E	1.0	6	12	60
SEME7201204E	1.2	6	4	60
SEME7201206E	1.2	6	6	60
SEME7201208E	1.2	6	8	60
SEME7201210E	1.2	6	10	60
SEME7201212E	1.2	6	12	60
★ SEME7201506E	1.5	6	6	60
★ SEME7201508E	1.5	6	8	60
SEME7201510E	1.5	6	10	60
SEME7201512E	1.5	6	12	60
SEME7201514E	1.5	6	14	60
SEME7201516E	1.5	6	16	60
★ SEME7202008E	2.0	6	8	60
★ SEME7202010E	2.0	6	10	60
★ SEME7202012E	2.0	6	12	60
★ SEME7202014E	2.0	6	14	60
★ SEME7202016E	2.0	6	16	60

★ : Stock Item ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	29	32	38	35	15	35	12	23	10	26	3	25	19	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7202510E	2.5	6	10	60
★ SEME7202512E	2.5	6	12	60
SEME7202516E	2.5	6	16	60
SEME7202520E	2.5	6	20	60
SEME7202526E	2.5	6	26	60
SEME72030163SE	3.0	3	16	100
★ SEME7203010E	3.0	6	10	70
★ SEME7203012E	3.0	6	12	70
★ SEME7203014E	3.0	6	14	70
★ SEME7203016E	3.0	6	16	70
★ SEME7203020E	3.0	6	20	70
★ SEME7203026E	3.0	6	26	70
★ SEME7203030E	3.0	6	30	70
★ SEME72040204SE	4.0	4	20	100
★ SEME7204012E	4.0	6	12	70
★ SEME7204016E	4.0	6	16	70
★ SEME7204020E	4.0	6	20	70
★ SEME7204026E	4.0	6	26	70
★ SEME7204030E	4.0	6	30	70
★ SEME7205020E	5.0	6	20	70
★ SEME7205025E	5.0	6	25	70
★ SEME7205025100E	5.0	6	25	100
★ SEME7205030E	5.0	6	30	80
★ SEME7205035E	5.0	6	35	90

★ : Stock Item ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	29	32	38	35	15	35	12	23	10	26	3	25	19	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7205040E	5.0	6	40	100
★ SEME7206015E	6.0	6	15	60
★ SEME7206015080E	6.0	6	15	80
★ SEME7206020E	6.0	6	20	70
★ SEME7206020090E	6.0	6	20	90
★ SEME7206025E	6.0	6	25	75
★ SEME7206030E	6.0	6	30	80
★ SEME7206030100E	6.0	6	30	100
SEME7206030150E	6.0	6	30	150
★ SEME7206035E	6.0	6	35	90
★ SEME7206040E	6.0	6	40	90
★ SEME7206040120E	6.0	6	40	120
★ SEME7206045E	6.0	6	45	150
★ SEME7208025E	8.0	8	25	80
★ SEME7208030E	8.0	8	30	80
★ SEME7208030100E	8.0	8	30	100
★ SEME7208035E	8.0	8	35	90
★ SEME7208040E	8.0	8	40	90
SEME7208040120E	8.0	8	40	120
SEME7208040150E	8.0	8	40	150
★ SEME7208045E	8.0	8	45	100
★ SEME7208050E	8.0	8	50	100
★ SEME7208050150E	8.0	8	50	150
★ SEME7210030E	10.0	10	30	80

★ : Stock Item ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	10	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7210030100E	10.0	10	30	100
★ SEME7210035E	10.0	10	35	90
★ SEME7210040E	10.0	10	40	90
★ SEME7210040120E	10.0	10	40	120
★ SEME7210045E	10.0	10	45	100
★ SEME7210050E	10.0	10	50	100
★ SEME7210050150E	10.0	10	50	150
SEME7210050200E	10.0	10	50	200
★ SEME7210055E	10.0	10	55	150
★ SEME7210060E	10.0	10	60	110
SEME7210060200E	10.0	10	60	200
★ SEME7212035E	12.0	12	35	90
★ SEME7212040E	12.0	12	40	100
★ SEME7212040120E	12.0	12	40	120
★ SEME7212045E	12.0	12	45	130
★ SEME7212050E	12.0	12	50	100
★ SEME7212050150E	12.0	12	50	150
★ SEME7212055E	12.0	12	55	110
★ SEME7212060E	12.0	12	60	110
★ SEME7212060150E	12.0	12	60	150
SEME7212060200E	12.0	12	60	200
SEME7212065E	12.0	12	65	150
SEME7212070E	12.0	12	70	120
SEME7212070200E	12.0	12	70	200

★ : Stock Item ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	10	15	35	12	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME7214050E	14.0	16	50	110
★ SEME7214060E	14.0	16	60	150
SEME7216040E	16.0	16	40	150
★ SEME7216050E	16.0	16	50	110
SEME7216050150E	16.0	16	50	150
★ SEME7216060E	16.0	16	60	120
★ SEME7216070E	16.0	16	70	130
★ SEME7216070150E	16.0	16	70	150
SEME7216070200E	16.0	16	70	200
SEME7216080E	16.0	16	80	150
SEME7216090E	16.0	16	90	150
SEME72160110E	16.0	16	110	200
SEME72160120E	16.0	16	120	250
SEME7218050E	18.0	20	50	120
SEME7218070E	18.0	20	70	130
SEME72180100E	18.0	20	100	200
★ SEME7220050E	20.0	20	50	110
SEME7220050150E	20.0	20	50	150
★ SEME7220060E	20.0	20	60	130
★ SEME7220070E	20.0	20	70	130
SEME7220080E	20.0	20	80	150
★ SEME7220090E	20.0	20	90	150
★ SEME7220090200E	20.0	20	90	200
SEME72200110E	20.0	20	110	200

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	10	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE LONG LENGTH

SEME72 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRc55 and machine parts.
- ▶ Available in short, regular and long shank end mills.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
★ SEME72200120E	20.0	20	120	250
SEME7222075E	22.0	20	75	150
SEME72220110E	22.0	20	110	200
SEME7225070E	25.0	25	70	150
★ SEME7225090E	25.0	25	90	150
SEME72250110E	25.0	25	110	200
SEME72250120E	25.0	25	120	250

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	10	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE with EXTENDED NECK

SEME73 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in several effective lengths of cut and also overall lengths than previous standard products.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
SEME7301002E	1.0	4	1.5	2	50	0.95
SEME7301003E	1.0	4	1.5	3	50	0.95
★ SEME7301004E	1.0	4	1.5	4	50	0.95
★ SEME7301005E	1.0	4	1.5	5	50	0.95
★ SEME7301006E	1.0	4	1.5	6	50	0.95
SEME7301007E	1.0	4	1.5	7	50	0.95
★ SEME7301008E	1.0	4	1.5	8	50	0.95
★ SEME7301010E	1.0	4	1.5	10	50	0.95
★ SEME7301012E	1.0	4	1.5	12	50	0.95
SEME7301014E	1.0	4	1.5	14	50	0.95
SEME7301016E	1.0	4	1.5	16	50	0.95
SEME7301018E	1.0	4	1.5	18	50	0.95
SEME7301020E	1.0	4	1.5	20	50	0.95
SEME7301022E	1.0	4	1.5	22	60	0.95
SEME7301026E	1.0	4	1.5	26	60	0.95
SEME7301030E	1.0	4	1.5	30	70	0.95
SEME7301040E	1.0	4	1.5	40	80	0.95
SEME7301050E	1.0	4	1.5	50	100	0.95
SEME7301204E	1.2	4	1.8	4	50	1.15
SEME7301206E	1.2	4	1.8	6	50	1.15
SEME7301208E	1.2	4	1.8	8	50	1.15
SEME7301210E	1.2	4	1.8	10	50	1.15
SEME7301212E	1.2	4	1.8	12	50	1.15
SEME7301214E	1.2	4	1.8	14	50	1.15
SEME7301216E	1.2	4	1.8	16	50	1.15
SEME7301220E	1.2	4	1.8	20	50	1.15

★ : Stock Item  
Mill Dia. Tolerance (mm): 0 ~ - 0.03  
Shank Dia. Tolerance: h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	23	10	26	3	25		13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE with EXTENDED NECK

SEME73 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in several effective lengths of cut and also overall lengths than previous standard products.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
SEME7301226E	1.2	4	1.8	26	60	1.15
SEME7301230E	1.2	4	1.8	30	70	1.15
SEME7301504E	1.5	4	2.3	4	50	1.45
SEME7301505E	1.5	4	2.3	5	50	1.45
★ SEME7301506E	1.5	4	2.3	6	50	1.45
SEME7301507E	1.5	4	2.3	7	50	1.45
★ SEME7301508E	1.5	4	2.3	8	50	1.45
★ SEME7301510E	1.5	4	2.3	10	50	1.45
★ SEME7301512E	1.5	4	2.3	12	50	1.45
SEME7301514E	1.5	4	2.3	14	50	1.45
★ SEME7301516E	1.5	4	2.3	16	50	1.45
SEME7301518E	1.5	4	2.3	18	50	1.45
SEME7301520E	1.5	4	2.3	20	50	1.45
SEME7301522E	1.5	4	2.3	22	60	1.45
SEME7301526E	1.5	4	2.3	26	60	1.45
SEME7301530E	1.5	4	2.3	30	70	1.45
★ SEME7302006E	2.0	4	3	6	50	1.95
★ SEME7302008E	2.0	4	3	8	50	1.95
★ SEME7302010E	2.0	4	3	10	50	1.95
★ SEME7302012E	2.0	4	3	12	50	1.95
★ SEME7302014E	2.0	4	3	14	50	1.95
★ SEME7302016E	2.0	4	3	16	50	1.95
SEME7302018E	2.0	4	3	18	50	1.95
★ SEME7302020E	2.0	4	3	20	50	1.95
SEME7302022E	2.0	4	3	22	60	1.95
★ SEME7302026E	2.0	4	3	26	60	1.95

★ : Stock Item  
Mill Dia. Tolerance (mm): 0 ~ - 0.03  
Shank Dia. Tolerance: h5

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	23	10	26	3	25		13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE with EXTENDED NECK

**SEME73** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in several effective lengths of cut and also overall lengths than previous standard products.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
SEME7302030E	2.0	4	3	30	70	1.95
SEME7302035E	2.0	4	3	35	70	1.95
SEME7302040E	2.0	4	3	40	80	1.95
SEME7302045E	2.0	4	3	45	90	1.95
SEME7302050E	2.0	4	3	50	100	1.95
SEME7302060E	2.0	4	3	60	110	1.95
SEME7302508E	2.5	4	4	8	50	2.40
★ SEME7302510E	2.5	4	4	10	50	2.40
★ SEME7302512E	2.5	4	4	12	50	2.40
SEME7302514E	2.5	4	4	14	50	2.40
SEME7302516E	2.5	4	4	16	50	2.40
SEME7302518E	2.5	4	4	18	50	2.40
SEME7302520E	2.5	4	4	20	50	2.40
SEME7302522E	2.5	4	4	22	60	2.40
SEME7302526E	2.5	4	4	26	60	2.40
SEME7302530E	2.5	4	4	30	70	2.40
SEME7302535E	2.5	4	4	35	70	2.40
SEME7302540E	2.5	4	4	40	80	2.40
SEME7302545E	2.5	4	4	45	90	2.40
SEME7302550E	2.5	4	4	50	100	2.40
SEME7303006E	3.0	6	4.5	6	50	2.85
★ SEME7303008E	3.0	6	4.5	8	50	2.85
★ SEME7303010E	3.0	6	4.5	10	50	2.85
SEME7303012E	3.0	6	4.5	12	50	2.85
★ SEME7303014E	3.0	6	4.5	14	60	2.85
SEME7303016E	3.0	6	4.5	16	60	2.85

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	42	15	23	25	30	10	26	3	25	25	30
HB	125	190	250	270	300	180	275	300	350	400	200	240	180	180	260	160	250	130	230	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE with EXTENDED NECK

**SEME73** SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in several effective lengths of cut and also overall lengths than previous standard products.



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
★ SEME7303018E	3.0	6	4.5	18	60	2.85
SEME7303020E	3.0	6	4.5	20	60	2.85
★ SEME7303022E	3.0	6	4.5	22	65	2.85
★ SEME7303026E	3.0	6	4.5	26	65	2.85
SEME7303030E	3.0	6	4.5	30	70	2.85
SEME7303035E	3.0	6	4.5	35	70	2.85
SEME7303040E	3.0	6	4.5	40	80	2.85
SEME7303045E	3.0	6	4.5	45	90	2.85
SEME7303050E	3.0	6	4.5	50	100	2.85
SEME7303060E	3.0	6	4.5	60	100	2.85
SEME7304008E	4.0	6	6	8	50	3.85
★ SEME7304010E	4.0	6	6	10	50	3.85
SEME7304012E	4.0	6	6	12	50	3.85
★ SEME7304014E	4.0	6	6	14	60	3.85
SEME7304016E	4.0	6	6	16	60	3.85
★ SEME7304018E	4.0	6	6	18	60	3.85
SEME7304020E	4.0	6	6	20	60	3.85
★ SEME7304022E	4.0	6	6	22	65	3.85
SEME7304025E	4.0	6	6	25	65	3.85
★ SEME7304026E	4.0	6	6	26	65	3.85
SEME7304030E	4.0	6	6	30	70	3.85
★ SEME7304035E	4.0	6	6	35	70	3.85
SEME7304040E	4.0	6	6	40	80	3.85
SEME7304045E	4.0	6	6	45	90	3.85
SEME7304050E	4.0	6	6	50	100	3.85
SEME7304060E	4.0	6	6	60	100	3.85

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	42	15	23	25	30	10	26	3	25	25	30
HB	125	190	250	270	300	180	275	300	350	400	200	240	180	180	260	160	250	130	230	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○



Y-COATED SOLID CARBIDE END MILLS  
4 FLUTE with EXTENDED NECK

SEME73 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent for cutting prehardened steels, carbon steels, alloy steels of molds and dies, up to HRC55 and machine parts.
- ▶ Available in several effective lengths of cut and also overall lengths than previous standard products.

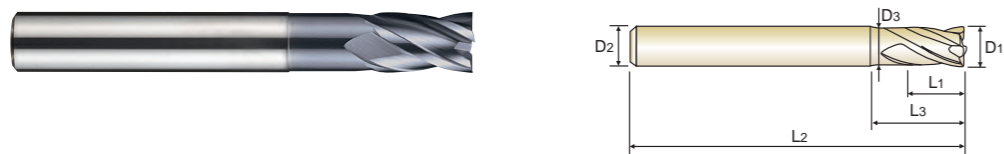

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
★ SEME7305016E	5.0	6	8	16	60	4.85
SEME7305020E	5.0	6	8	20	60	4.85
SEME7305026E	5.0	6	8	26	65	4.85
SEME7305030E	5.0	6	8	30	70	4.85
★ SEME7305035E	5.0	6	8	35	75	4.85
SEME7305040E	5.0	6	8	40	80	4.85
SEME7305050E	5.0	6	8	50	90	4.85
★ SEME7305060E	5.0	6	8	60	100	4.85
★ SEME7306015E	6.0	6	9	15	60	5.85
★ SEME7306020E	6.0	6	9	20	60	5.85
★ SEME7306030E	6.0	6	9	30	70	5.85
★ SEME7306032E	6.0	6	9	32	90	5.85
SEME7308025E	8.0	8	12	25	70	7.70
★ SEME7308030E	8.0	8	12	30	80	7.70
★ SEME7308042E	8.0	8	12	42	100	7.70
★ SEME7310030E	10.0	10	15	30	75	9.70
★ SEME7310035E	10.0	10	15	35	80	9.70
★ SEME7310045E	10.0	10	15	45	100	9.70
SEME7312035E	12.0	12	20	35	80	11.70
★ SEME7312040E	12.0	12	20	40	90	11.70
SEME7312050E	12.0	12	20	50	110	11.70

★ : Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	12	23	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
6 FLUTE 45° HELIX (Regular, Long Shank)

SEME75 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ From the 45 helix angle, better surface roughness can be achieved at side cutting.
- ▶ Available in several effective lengths of cut and also overall lengths



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
★ SEME75060E	6.0	6	15	60	Regular
SEME7506020E	6.0	6	20	70	Long
★ SEME7506030E	6.0	6	30	80	Long
SEME7506030110E	6.0	6	30	110	Long
★ SEME75080E	8.0	8	20	70	Regular
★ SEME7508030E	8.0	8	30	80	Long
SEME7508035E	8.0	8	35	90	Long
★ SEME7508040E	8.0	8	40	90	Long
SEME7508040130E	8.0	8	40	130	Long
★ SEME75100E	10.0	10	25	75	Regular
SEME7510030E	10.0	10	30	80	Long
★ SEME7510040E	10.0	10	40	90	Long
SEME7510050E	10.0	10	50	100	Long
SEME7510050150E	10.0	10	50	150	Long
★ SEME75120E	12.0	12	30	80	Regular
★ SEME7512040E	12.0	12	40	90	Long
★ SEME7512050E	12.0	12	50	100	Long
SEME7512060E	12.0	12	60	110	Long
SEME7512060150E	12.0	12	60	150	Long
★ SEME75160E	16.0	16	40	100	Regular
SEME7516050E	16.0	16	50	110	Long
★ SEME7516060E	16.0	16	60	120	Long
SEME7516090E	16.0	16	90	150	Long
SEME75160110E	16.0	16	110	200	Long

★ : Stock Item

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M				K				
	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	12	23	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

Y-COATED SOLID CARBIDE END MILLS  
6 FLUTE 45° HELIX (Regular, Long Shank)

SEME75 SERIES

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ From the 45 helix angle, better surface roughness can be achieved at side cutting.
- ▶ Available in several effective lengths of cut and also overall lengths



EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	D1	D2	L1	L2	
SEME75160110250E	16.0	16	110	250	Long
★ SEME75200E	20.0	20	45	100	Regular
★ SEME7520060E	20.0	20	60	120	Long
SEME7520070E	20.0	20	70	130	Long
SEME75200110E	20.0	20	110	200	Long
SEME75200110250E	20.0	20	110	250	Long
SEME75200110300E	20.0	20	110	300	Long


★: Stock Item

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 -- 0.03	h5

X-COATED SOLID CARBIDE END MILLS  
4&5 FLUTE MULTIPLE HELIX CORNER RADIUS

PLAIN SHANK G9D75 G9D76  
FLAT SHANK G9D67 G9D68

- ▶ Unique flute design for excellent chip evacuation and vibration reduction.
- ▶ Optimal roughing tooth profile to reduce cutting forces.
- ▶ Special tool geometry for high feed rate and heavy cutting.
- ▶ Strong end tooth design for plunge and pocket milling.
- ▶ Custom engineered coating to allow long tool life and excellent chip evacuation.

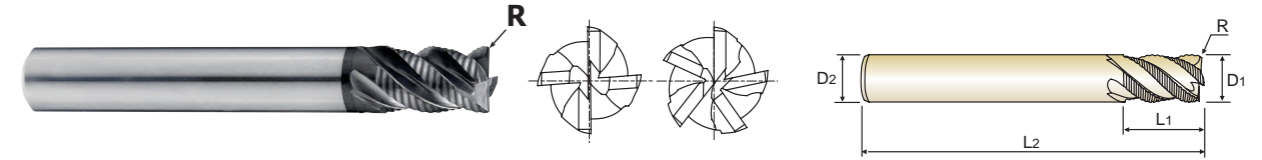

SHORT LENGTH

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
PLAIN	FLAT	R	D1	D2	L1	L2	
G9D75060	G9D67060	R0.5	6.0	6	9	57	4
G9D75080	G9D67080	R0.5	8.0	8	12	63	4
G9D75100	G9D67100	R0.5	10.0	10	15	72	4
G9D75120	G9D67120	R0.5	12.0	12	18	83	4
G9D75160	G9D67160	R1.0	16.0	16	24	92	5
G9D75200	G9D67200	R1.0	20.0	20	30	104	5

LONG LENGTH

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
PLAIN	FLAT	R	D1	D2	L1	L2	
G9D76060	G9D68060	R0.5	6.0	6	12	57	4
G9D76080	G9D68080	R0.5	8.0	8	16	63	4
G9D76100	G9D68100	R0.5	10.0	10	20	72	4
G9D76120	G9D68120	R0.5	12.0	12	24	83	4
G9D76160	G9D68160	R1.0	16.0	16	32	92	5
G9D76200	G9D68200	R1.0	20.0	20	40	104	5

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 -- 0.05	h5

◎: Excellent ○: Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎: Excellent ○: Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	◎	◎	◎	◎	◎	◎


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**X-COATED SOLID CARBIDE END MILLS**  
**4&5 FLUTE MULTIPLE HELIX LONG REACH CORNER RADIUS**

PLAIN SHANK **G9D77** SERIES  
FLAT SHANK **G9D69** SERIES

- ▶ Unique flute design for excellent chip evacuation and vibration reduction.
- ▶ Optimal roughing tooth profile to reduce cutting forces.
- ▶ Special tool geometry for high feed rate and heavy cutting.
- ▶ Strong end tooth design for plunge and pocket milling.
- ▶ Custom engineered coating to allow long tool life and excellent chip evacuation.

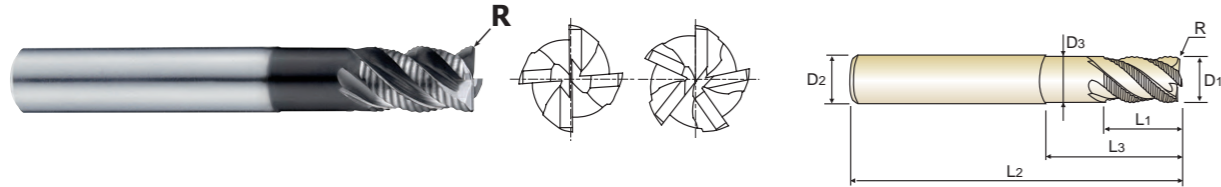



EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	No. of Flute
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3	
G9D77060	G9D69060	R0.5	6.0	6	9	18	57	5.50	4
G9D77080	G9D69080	R0.5	8.0	8	12	24	63	7.50	4
G9D77100	G9D69100	R0.5	10.0	10	15	30	72	9.50	4
G9D77120	G9D69120	R0.5	12.0	12	18	36	83	11.50	4
G9D77160	G9D69160	R1.0	16.0	16	24	48	100	15.50	5
G9D77200	G9D69200	R1.0	20.0	20	30	60	110	19.20	5

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 - - 0.05	h5

**X-COATED HSS-PM END MILLS**  
**4&5 FLUTE MULTIPLE HELIX SHORT LENGTH CORNER RADIUS**

FLAT SHANK **GAE53** SERIES

- ▶ Unique flute design for excellent chip evacuation and vibration reduction.
- ▶ Optimal roughing tooth profile to reduce cutting forces.
- ▶ Special tool geometry for high feed rate and heavy cutting.
- ▶ Strong end tooth design for plunge and pocket milling.
- ▶ Custom engineered coating to allow long tool life and excellent chip evacuation.

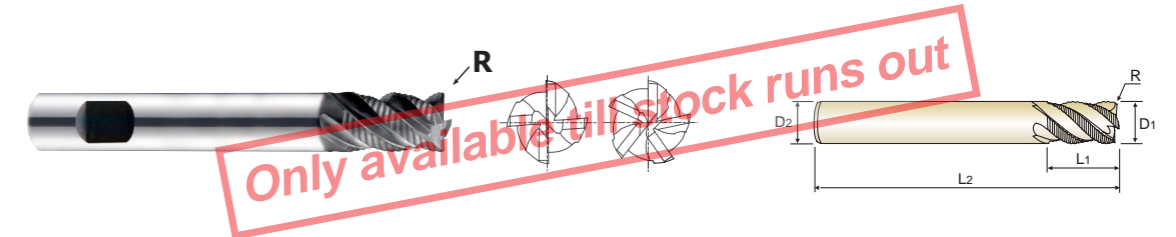

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
FLAT	R	D1(js12)	D2(h6)	L1	L2	
▲ GAE53060	R0.5	6.0	6	13	57	4
▲ GAE53070	R0.5	7.0	10	16	66	4
▲ GAE53080	R0.5	8.0	10	19	69	4
▲ GAE53090	R0.5	9.0	10	19	69	4
▲ GAE53100	R0.5	10.0	10	22	72	4
▲ GAE53120	R0.5	12.0	12	26	83	4
▲ GAE53140	R1.0	14.0	16	26	83	5
▲ GAE53160	R1.0	16.0	16	32	92	5
▲ GAE53180	R1.0	18.0	20	32	92	5
▲ GAE53200	R1.0	20.0	20	38	104	5

▲ : Only available till stock runs out

**Tolerances according to DIN 7160 & 7161**

	Tolerance range in μm					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	± 50	± 60	± 75	± 90	± 105	± 125
h6	0	0	0	0	0	0
	- 6	- 8	- 9	- 11	- 13	- 16

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	◎	◎	◎	◎	◎	◎

ISO Material Description	N				S						H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron									
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	26	3	25	19	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230		
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N				S						H											
	Aluminum-wrought alloy	Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron									
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○










SEM846 SERIES 2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for ISO, VDI 3323, Parameter, Diameter (Ø), and rows for Vc, fz, RPM, FEED, Ap across various ISO grades (P, K, H) and diameters.

▶ NEXT PAGE

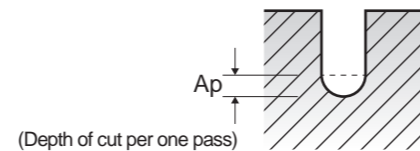


SEM846 SERIES 2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for VDI 3323, Parameter, Diameter (Ø), and rows for Vc, fz, RPM, FEED, Ap across various diameters.

▶ NEXT PAGE

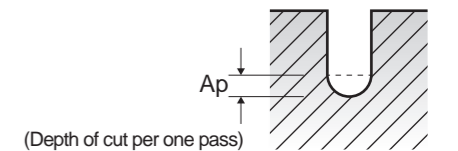






SEM846 SERIES 2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for ISO (P, K, H), VDI 3323, Parameter (Vc, fz, RPM, FEED, Ap), and Diameter (Ø) with various size options (4.0, 5.0, 6.0, 8.0, 10.0, 12.0).


▶ NEXT PAGE

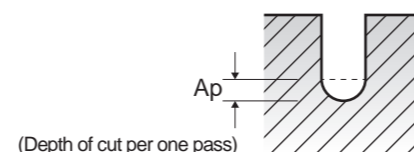

SEM846 SERIES 2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for VDI 3323, Parameter (Vc, fz, RPM, FEED, Ap), and Diameter (Ø) with various size options (5.0, 6.0, 8.0, 10.0, 12.0).

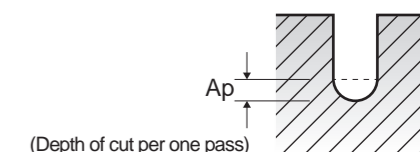




SEME61 SERIES 2 FLUTE CORNER RADIUS - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns: ISO, VDI 3323, Material Description, Parameter, Diameter (Ø), and cutting parameters (Vc, fz, RPM, FEED, Ap) for materials like Non-alloy steel, Low alloy steel, High alloyed steel, Grey cast iron, etc.

▶ NEXT PAGE

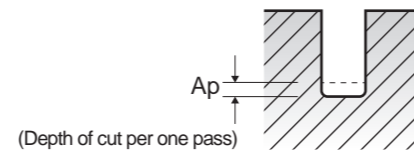


SEME61 SERIES 2 FLUTE CORNER RADIUS - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns: VDI 3323, Parameter, and cutting parameters (Vc, fz, RPM, FEED, Ap) for materials like Non-alloy steel, Low alloy steel, High alloyed steel, Grey cast iron, etc.

▶ NEXT PAGE

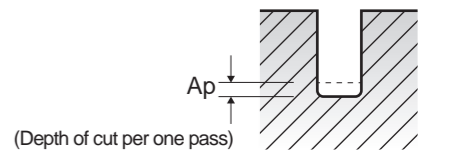






SEME61 SERIES 2 FLUTE CORNER RADIUS - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns: ISO, VDI 3323, Parameter, Diameter (Ø), Vc, fz, RPM, FEED, Ap. Rows include ISO P (1-5, 6-8, 9, 10-11.1, 11.2), ISO K (15-20), and ISO H (38.1-38.2, 40, 41).


▶ NEXT PAGE

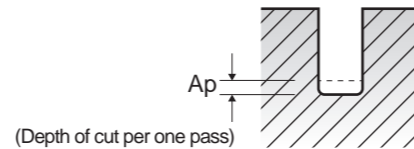

SEME61 SERIES 2 FLUTE CORNER RADIUS - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns: VDI 3323, Parameter, Diameter (Ø), Vc, fz, RPM, FEED, Ap. Rows include VDI 3323 (1-5, 6-8, 9, 10-11.1, 11.2, 15-20, 38.1-38.2, 40, 41).

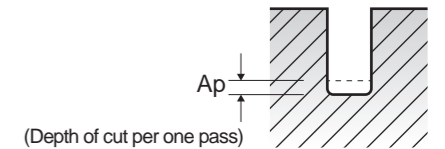


SEME01 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

Table with columns for ISO, VDI 3323, Material Description, Ae, Ap, Parameter, and Diameter (Ø) ranging from 1.0 to 4.0. Rows include material groups P (1-5, 6-8, 9, 10-11.1, 11.2), K (15-20), and H (38.1, 38.2, 40, 41).

▶ NEXT PAGE




\* 1.5XD Axial cutting depth should be for diameter over 16mm

SEME01 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

Table with columns for VDI 3323, Parameter, and Diameter (Ø) ranging from 4.5 to 20.0. Rows include material groups 1-5, 6-8, 9, 10-11.1, 11.2, and 15-20.



\* 1.5XD Axial cutting depth should be for diameter over 16mm








**SEME35 SERIES** 2 FLUTE - SLOTTING

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)												
						0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0			
<b>P</b>	1-5	Non-alloy steel	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	13	26	37	49	57	60	62	63	66	68			
					fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.004	0.004			
	RPM	41380	41380	39258	38993	36287	31831	28193	25067	23343	21645							
	FEED	83	83	79	78	145	127	169	150	187	173							
	6-8	Low alloy steel	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	13	26	37	49	57	60	62	63	66	68			
fz					0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.004	0.004				
9	Low alloy steel	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	8	16	22	29	34	36	37	38	40	41				
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.003	0.004				
10-11.1	High alloyed steel, and tool steel	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	13	26	37	49	57	60	62	63	66	68				
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.004	0.004				
11.2	High alloyed steel, and tool steel	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	8	16	22	29	34	36	37	38	40	41				
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.003	0.004				
<b>M</b>	14.1	Stainless steel	1.0D	0.5D (up to Ø1: 0.02D)	Vc	7	13	18	25	28	30	31	31	33	34			
					fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.003	0.004			
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	0.5D (up to Ø3: 0.2D) (up to Ø1: 0.15D)	Vc	13	26	37	49	57	60	62	63	66	68			
					fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.004	0.004			
<b>H</b>	38.1-38.2	Hardened steel	1.0D	0.05D (up to Ø1: 0.02D)	Vc	5	11	15	20	23	24	25	25	27	27			
					fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002			
40	Chilled Cast Iron	1.0D	0.05D (up to Ø1: 0.02D)	Vc	8	16	22	29	34	36	37	38	40	41				
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.003	0.004				
41	Hardened Cast Iron	1.0D	0.05D (up to Ø1: 0.02D)	Vc	5	11	15	20	23	24	25	25	27	27				
				fz	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002				

▶ NEXT PAGE




**SEME35 SERIES** 2 FLUTE - SLOTTING

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)												
		1.2	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0
1-5	Vc	68	71	73	80	84	91	95	98	99	102	105	107	107
	fz	0.005	0.006	0.009	0.01	0.012	0.016	0.021	0.023	0.027	0.03	0.033	0.036	0.039
6-8	Vc	68	71	73	80	84	91	95	98	99	102	105	107	107
	fz	0.005	0.006	0.009	0.01	0.012	0.016	0.021	0.023	0.027	0.03	0.033	0.036	0.039
9	Vc	41	42	48	52	52	56	58	59	59	62	63	64	65
	fz	0.005	0.006	0.008	0.01	0.013	0.017	0.021	0.023	0.026	0.03	0.034	0.036	0.037
10-11.1	Vc	68	71	73	80	84	91	95	98	99	102	105	107	107
	fz	0.005	0.006	0.009	0.01	0.012	0.016	0.021	0.023	0.027	0.03	0.033	0.036	0.039
11.2	Vc	41	42	48	52	52	56	58	59	59	62	63	64	65
	fz	0.005	0.006	0.008	0.01	0.013	0.017	0.021	0.023	0.026	0.03	0.034	0.036	0.037
14.1	Vc	34	35	40	43	44	47	49	50	50	52	54	54	54
	fz	0.005	0.006	0.008	0.01	0.014	0.016	0.021	0.023	0.027	0.03	0.033	0.036	0.038
15-20	Vc	68	71	73	80	84	91	95	98	99	102	105	107	107
	fz	0.005	0.006	0.009	0.01	0.012	0.016	0.021	0.023	0.027	0.03	0.033	0.036	0.039
38.1-38.2	Vc	27	28	32	33	32	35	37	37	36	37	38	39	40
	fz	0.002	0.003	0.004	0.005	0.006	0.007	0.007	0.009	0.011	0.013	0.015	0.016	0.018
40	Vc	41	42	48	52	52	56	58	59	59	62	63	64	65
	fz	0.005	0.006	0.008	0.01	0.013	0.017	0.021	0.023	0.026	0.03	0.034	0.036	0.037
41	Vc	27	28	32	33	32	35	37	37	36	37	38	39	40
	fz	0.002	0.003	0.004	0.005	0.006	0.007	0.007	0.009	0.011	0.013	0.015	0.016	0.018

▶ NEXT PAGE








SEME70 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth  
RPM = rev./min. FEED = mm/min.  
LOC = Length of Cut

Table with columns: ISO, VDI 3323, Ae, Ap, Parameter, LOC, Diameter (Ø) (3.0, 4.0, 5.0, 6.0), and rows for ISO P (1-5, 6-8, 9, 10-11.1, 11.2), ISO K (15-20), and ISO H (38.1-38.2, 40, 41).

▶ NEXT PAGE




SEME70 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth  
RPM = rev./min. FEED = mm/min.  
LOC = Length of Cut

Table with columns: VDI 3323, Parameter, LOC, Diameter (Ø) (6.0, 8.0, 10.0, 12.0), and rows for VDI 3323 (1-5, 6-8, 9, 10-11.1, 11.2, 15-20, 38.1-38.2, 40, 41).

▶ NEXT PAGE






SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for ISO, VDI 3323, Material Description, Parameter (LBS), and Diameter (Ø) with values for Vc, fz, RPM, FEED, and Ap across various material groups like Non-alloy steel, Low alloy steel, High alloyed steel, Grey cast iron, etc.

▶ NEXT PAGE

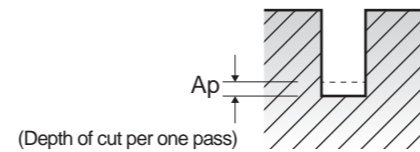


SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for VDI 3323, Parameter (LBS), and Diameter (Ø) with values for Vc, fz, RPM, FEED, and Ap across various material groups like Non-alloy steel, Low alloy steel, High alloyed steel, Grey cast iron, etc.

▶ NEXT PAGE

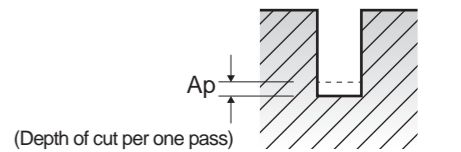








SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for ISO, VDI 3323, Parameter, Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different tool sizes and materials.

▶ NEXT PAGE

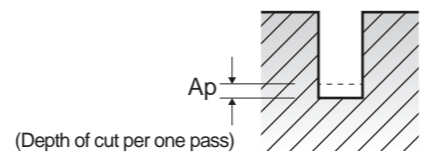


SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for VDI 3323, Parameter, Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ap) for different tool sizes and materials.

▶ NEXT PAGE

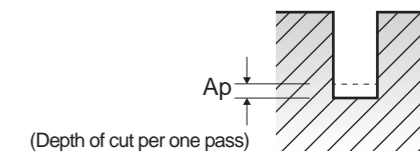


### SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min.    fz = mm/tooth  
RPM = rev./min.    FEED = mm/min.  
Ap = mm             LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (∅)																							
			3.0	3.0	3.0	3.0	3.0	3.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0					
			LBS	30	35	40	45	50	60	8	10	12	14	16	18	20	22	26	30	35	40	45	50			
P	1-5	Vc	92	82	82	82	62	62	101	101	101	101	101	101	101	90	90	90	90	90	80	80				
		6-8	Vc	92	82	82	82	62	62	101	101	101	101	101	101	101	90	90	90	90	90	80	80			
			9	Vc	87	78	78	78	58	58	96	96	96	96	96	96	96	86	86	86	86	86	76	76		
				10-11.1	Vc	92	82	82	82	62	62	101	101	101	101	101	101	101	90	90	90	90	90	80	80	
					11.2	Vc	87	78	78	78	58	58	96	96	96	96	96	96	96	86	86	86	86	86	76	76
	K 15-20					Vc	92	82	82	82	62	62	101	101	101	101	101	101	101	90	90	90	90	90	80	80
		H				38.1-38.2	Vc	56	50	50	50	37	37	84	84	84	84	84	84	76	76	76	76	76	67	67
			40				Vc	87	78	78	78	58	58	96	96	96	96	96	96	96	86	86	86	86	86	76
				41			Vc	56	50	50	50	37	37	84	84	84	84	84	84	76	76	76	76	76	76	67


▶ NEXT PAGE

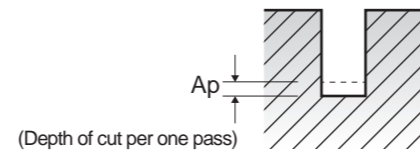

### SEM845 SERIES 2 FLUTE - SLOTTING

Vc = m/min.    fz = mm/tooth  
RPM = rev./min.    FEED = mm/min.  
Ap = mm             LBS = Length Below Shank

VDI 3323	Parameter	Diameter (∅)																							
		4.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	6.0	6.0	6.0	8.0	8.0	8.0	10.0	10.0	10.0	12.0	12.0	12.0			
		LBS	60	16	20	26	30	35	40	50	60	15	20	30	32	25	30	42	30	35	45	35	40	50	
1-5	Vc	80	101	101	90	90	90	90	90	90	100	100	100	90	101	101	90	101	101	101	100	100	100		
	fz	0.065	0.09	0.09	0.081	0.081	0.081	0.081	0.081	0.081	0.072	0.1	0.1	0.1	0.09	0.119	0.107	0.141	0.141	0.151	0.151	0.151	0.151		
	RPM	6366	6430	6430	5730	5730	5730	5730	5730	5730	5093	5305	5305	4775	4019	4019	3581	3215	3215	3215	2653	2653	2653		
	FEED	828	1157	1157	928	928	928	928	928	928	733	1061	1061	859	956	956	766	907	907	907	801	801	801		
	Ap	0.054	0.315	0.315	0.18	0.18	0.18	0.18	0.18	0.18	0.113	0.113	0.54	0.378	0.378	0.216	0.504	0.504	0.288	0.9	0.63	0.63	1.08	0.756	0.756
15-20	Vc	80	101	101	90	90	90	90	90	90	100	100	100	90	101	101	90	101	101	101	100	100	100		

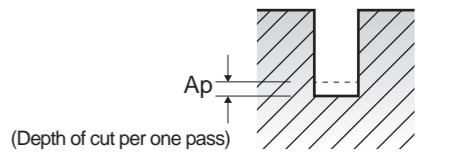













### SEME72 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth  
 RPM = rev./min. FEED = mm/min.  
 LOC = Length of Cut

ISO	VDI 3323	Ae	Ap	Parameter	Diameter (Ø)																			
					10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0	14.0	16.0	16.0	16.0	16.0	16.0	16.0				
					LOC	60	35	40	45	50	55	60	65	70	50	60	40	50	60	70	80			
P	1-5	0.05D	2.5D	Vc	80	87	87	87	87	87	87	87	78	78	93	93	98	98	98	98	98	98		
				fz	0.037	0.047	0.047	0.04	0.04	0.04	0.035	0.035	0.035	0.041	0.041	0.05	0.05	0.042	0.042	0.042	0.037			
				RPM	2546	2308	2308	2308	2308	2308	2308	2069	2069	2114	2114	1950	1950	1950	1950	1950	1950	1950		
				FEED	377	434	434	369	369	369	323	290	290	347	347	390	390	328	328	328	289			
				Vc	80	87	87	87	87	87	87	78	78	93	93	98	98	98	98	98	98	98		
	fz	0.037	0.047	0.047	0.04	0.04	0.04	0.035	0.035	0.035	0.041	0.041	0.05	0.05	0.042	0.042	0.042	0.037						
	RPM	2546	2308	2308	2308	2308	2308	2308	2069	2069	2114	2114	1950	1950	1950	1950	1950	1950	1950					
	FEED	377	434	434	369	369	369	323	290	290	347	347	390	390	328	328	328	289						
	fz	0.024	0.034	0.034	0.03	0.03	0.03	0.026	0.026	0.026	0.029	0.029	0.035	0.035	0.03	0.03	0.03	0.027						
	RPM	1464	1379	1379	1379	1379	1379	1379	1247	1247	1228	1228	1074	1074	1074	1074	1074	1074	1074					
	FEED	141	188	188	166	166	166	143	130	130	142	142	150	150	129	129	129	116						
	fz	0.037	0.047	0.047	0.04	0.04	0.04	0.035	0.035	0.035	0.041	0.041	0.05	0.05	0.042	0.042	0.042	0.037						
	RPM	2546	2308	2308	2308	2308	2308	2308	2069	2069	2114	2114	1950	1950	1950	1950	1950	1950	1950					
	FEED	377	434	434	369	369	369	323	290	290	347	347	390	390	328	328	328	289						
	fz	0.024	0.034	0.034	0.03	0.03	0.03	0.026	0.026	0.026	0.029	0.029	0.035	0.035	0.03	0.03	0.03	0.027						
RPM	1464	1379	1379	1379	1379	1379	1379	1247	1247	1228	1228	1074	1074	1074	1074	1074	1074	1074						
FEED	141	188	188	166	166	166	143	130	130	142	142	150	150	129	129	129	116							
K	15-20	0.05D	2.5D	Vc	80	87	87	87	87	87	87	78	78	93	93	98	98	98	98	98				
				fz	0.037	0.047	0.047	0.04	0.04	0.04	0.035	0.035	0.035	0.041	0.041	0.05	0.05	0.042	0.042	0.037				
				RPM	2546	2308	2308	2308	2308	2308	2308	2069	2069	2114	2114	1950	1950	1950	1950	1950	1950			
				FEED	377	434	434	369	369	369	323	290	290	347	347	390	390	328	328	328	289			
H	38.1-38.2	0.02D	2.0D	Vc	29	32	32	32	32	32	29	29	33	33	34	34	34	34	34	34				
				fz	0.021	0.025	0.025	0.021	0.021	0.021	0.019	0.018	0.018	0.021	0.021	0.026	0.026	0.022	0.022	0.021				
	RPM	923	849	849	849	849	849	849	769	769	750	750	676	676	676	676	676	676	676					
	FEED	78	85	85	71	71	71	65	55	55	63	63	70	70	60	60	60	57						
	Vc	46	52	52	52	52	52	52	47	47	54	54	54	54	54	54	54	54						
	fz	0.024	0.034	0.034	0.03	0.03	0.03	0.026	0.026	0.026	0.029	0.029	0.035	0.035	0.03	0.03	0.03	0.027						
	RPM	1464	1379	1379	1379	1379	1379	1379	1247	1247	1228	1228	1074	1074	1074	1074	1074	1074	1074					
FEED	141	188	188	166	166	166	143	130	130	142	142	150	150	129	129	129	116							
Vc	29	32	32	32	32	32	29	29	33	33	34	34	34	34	34	34	34							
fz	0.021	0.025	0.025	0.021	0.021	0.021	0.019	0.018	0.018	0.021	0.021	0.026	0.026	0.022	0.022	0.021								
RPM	923	849	849	849	849	849	849	769	769	750	750	676	676	676	676	676	676	676						
FEED	78	85	85	71	71	71	65	55	55	63	63	70	70	60	60	60	57							

▶ NEXT PAGE






SEME73 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev/min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

Table with ISO (P, K, H), VDI 3323, Parameter, and Diameter (Ø) columns. Contains cutting parameters Vc, fz, RPM, FEED, Ae for various diameters and ISO codes.

▶ NEXT PAGE




SEME73 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev/min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

Table with VDI 3323, Parameter, and Diameter (Ø) columns. Contains cutting parameters Vc, fz, RPM, FEED, Ae for various diameters and ISO codes.

▶ NEXT PAGE




SEME73 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

Table with columns for ISO, VDI 3323, Parameter, Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ae) for different tool types (P, K, H) and sizes.

▶ NEXT PAGE



SEME73 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

Table with columns for VDI 3323, Parameter, Diameter (Ø), and various cutting parameters (Vc, fz, RPM, FEED, Ae) for different tool types and sizes.



G9D75 G9D67, G9D76 G9D68, G9D77 G9D69

4&5 FLUTE CORNER RADIUS ROUGHING



Vc = m/min, fz = mm/tooth, RPM = rev./min, FEED = mm/min.

SLOTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) [6.0, 8.0, 10.0, 12.0, 16.0, 20.0]. Rows for ISO P (1-11) and ISO K (15-20) across materials like Non-alloy steel, Low alloy steel, and High alloyed steel.

SIDE CUTTING

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) [6.0, 8.0, 10.0, 12.0, 16.0, 20.0]. Rows for ISO P (1-11) and ISO K (15-20) across materials like Non-alloy steel, Low alloy steel, and High alloyed steel.

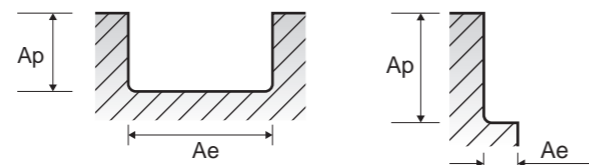

GAE53 SERIES

4&5 FLUTE CORNER RADIUS ROUGHING(HSS-PM) - SIDE CUTTING

Vc = m/min, fz = mm/tooth, RPM = rev./min, FEED = mm/min.

Table with columns: ISO, VDI 3323, Material Description, Ae, Ap, Parameter, Diameter (Ø) [6.0, 8.0, 10.0, 12.0, 14.0, 16.0, 18.0, 20.0]. Rows for ISO P (1-11) and ISO M (14.1), ISO K (15-20) across materials like Non-alloy steel, Low alloy steel, High alloyed steel, and Stainless steel.





P	VDI 3323 2		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.45% C, Annealed					190	13		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0501	S35C	C35	1035	080A32		1C35	1572	C35	F.113	G10350	35	
1.0503	S45C	C45	1045	060A47		XC42H1TS	1672	C45	F.114	G10450	45	
1.0511	S40C	C40	1040	080M40		1C40		C40	F.114.A	G10400	40	
1.0540	S 50 C	C50					1674	C50		G10500		
1.0551		GS-52	A2770-36	A2		280-480M	1505					
1.0553	SM 520 M	St52-3U	A14880-40	4360-50C		320-560M	1606	Fe510C				
1.0577		S 355 J 2 G 4	A738	Fe 510 D 2 FF		A52FP	2107					
1.0726		35S20	1140	212M36	8M	35MF6	1957			G11400	40	
1.0727		45S20	1146			45MF4	1973			G11460		
1.1157		40Mn4	1039	150M36	15	40M5				G10390	40G	
1.1158	S25C	C25E	1025	070M25		XC25		C25	F.1120	G10250	25	
1.1166	SMn433H	34Mn5	1536						TO.B	G15360		
1.1167	SMn438(H)	36Mn5	1335	150M36		40M5	2120	36Mn6	F.1203	G13350	35G2	
1.1170	SCMn1	28Mn6	1330	150M28	14A	20M5		C28Mn	28Mn6	G13300	30G	
1.1178	S 30 C	C30E		080M30		XC32		C30	2C30	G10300		
1.1180		C35R	1035	080A35		3C35	1572		F.1135	G10350		
1.1181	S35C	C35E	1035	080A35		XC38	1572	C36	F.1130	G10340	35	
1.1191	S45C	CK45	1045	080A46		XC45	1672	C45	F.1140		45	
1.1206	S 50 C	C50E	1050	080M50		2C50	1674	C50		G10500	50	
1.1213	S50C	Cf53	1050	070M55		XC48HTS	1674	C53		G10500	50	

P	VDI 3323 3		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.45% C, Annealed					250	25		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0481	SG365	17 Mn 4/P 295 GH	A516 Gr. 70	224-460B	P 295 GH	A 48 CP	2102	Fe E 295	A47RCl	K03501	14G2	
1.0501	S35C	C35	1035	080A32		1C35	1572	C35	F.1130	G10350	35	
1.0503	S45C	C45	1045	060A47		XC42H1TS	1672	C45	F.1140	G10450	45	
1.0614		C76D	1074			XC75				G10750		
1.0616		C86D	1086			XC80		C85		G10860		
1.0618		C92D	1095			XC90				G10950		
1.0726		35S20	1140	212M36	8M	35MF6	1957			G11400	40	
1.1157		40Mn4	1039	150M36	15	40M5				G10390	40G	
1.1165	SMn433H	30Mn5	1036	120M36		35M5		30Mn5	F.8211	K13300	30G2	
1.1167	SMn438(H)	36Mn5	1335	150M36		40M5	2120	36Mn6	F.1203	G13350	35G2	
1.1186	S40C	C40E	1040	060A40		2C40		C40		G10400		
1.1191	S45C	CK45	1045	080M46		2C45	1672	C45	F.1140		45	
1.1201	S50C	C45R	1049	080M46		3C45	1660	C45	F.1145		38HM	
1.1213	S50C	Cf53	1050	070M55		XC48HTS	1674	C53		G10500	50	
1.7242	SCM418 H	18CrMo4										
1.7337		16CrMo4-4	A387 Gr.12					A18CrMo45KW		K11564	15CM	
1.7362	SCMV6	12CrMo195		3606-625		Z10CD5-05		16CrMo205		K41545		
		17MnV6	A572-60	436055E		NFA35-501E36	2142					

P	VDI 3323 4		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.75% C, Annealed					270	28		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0603	S70C-CSP	C67	107	080A67		XC65		C67		G10700		
1.0605		C75	1075	144980HS				C75		G10740	75	
1.1203	S55C	CK55	1055	060A57		2C55	1655	C55	F.1150	G10550	55	
1.1209		C55R	1055	070M55		3C55		C55	F.1155	G10550		
1.1221	S58C	CK60	1060	060A62	43D	2C60	1678	C60	F.1150	G10640	60	
1.1231	S70C-CSP	C67E	1070	060A67		XC68	1770	C70	F5103	G10700	65GA	
1.1248	C 75	C75E	1074	060A78		XC75	1774	C75	F5107	G10800	75(A)	
1.1269	SK 5 -CSP	C85E	1086			XC90		C90		G10900	85(A)	
1.1274	SUP4	CK 101	1095	060 A 96	C 100S	XC100	1870	C100	F5117	G10950		
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F5118		U10A	
1.1663	SK 2	C 125 W	W112			Y2120					U13	

P	VDI 3323 5		Material Description			Composition / Structure / Heat Treatment					HB	HRC
	Non-alloyed steel			About 0.75% C, Quenched & Tempered					300	32		
Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
1.0070		St 70-2	1055	Fe690-2FN	-	A70-2	1655	Fe 690	F.1150		55	
1.0535	S55C	C55	1055	070M55		1C55	1655	C55		J05000	55	
1.0601	S58C	C60	1060	060A62	43D	1C60		C60		G10600	60(G)	
1.1203	S55C	CK55	1055	060A57		2C55	1655	C55	F.1150	G10550	55	
1.1221	S58C	CK60	1060	060A62	43D	2C60	1678	C60	F.1150	G10640	60	
1.1274	SUP4	CK 101	1095	060 A 96	C 100S	XC100	1870	C100	F5117	G10950		
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F5118		U10A	
1.1663	SK 2	C 125 W	W112			Y2120					U13	
1.5120		38MnSi4										
1.5710	SNC236	36NiCr6	3135	640A35	111A	35NC6						
1.7701		51CrMoV4						51CrMoV4				











Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 15 Grey cast iron Pearlitic / Ferritic HB 180 HRc 10</p>												
0.6010	FC100	GG10	A48 20 B	Grade 100	GJL-100	Ft 10 D	0100	G10	FG10		Sc 10	
0.6015	FC150	GG15	A48 25 B	Grade 150	GJL-150	Ft 15 D	0115	G15	FG15		Sc 15	
0.6020	FC200	GG20	A48 30 B	Grade 220	GJL-200	Ft 20 D	0120	G20	FG20	W06020	Sc 20	
0.6025	FC250	GG25	A48 40 B	Grade 260	GJL-250	Ft 25 D	0125	G25	FG25		Sc 25	
0.6660		GGL-NiCr 202	1050/700/7	Grade F2	GJLA-XNiCr 20-2	L-NC 202	0523	-		F41002	Ni-Resist 2	
1.4449	SUS317	X5CrNiMo17133	317	317S16				X5CrNiMo1815		S31700	ATI 317	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 19 Malleable cast iron Ferritic HB 130 HRc</p>												
0.8135	FCMW330	GTS-35	32510	B 340-12	GJMB350-10	MN 35-10	0815	GMN 35	GTS35		Kc 35-10	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 16 Grey cast iron Pearlitic (Martensitic) HB 260 HRc 26</p>												
0.6025	FC250	GG25	A48 40 B	Grade 260	GJL-250	Ft 25 D	0125	G25	FG25		Sc 25	
0.6030	FC300	GG30	A48 45 B	Grade 300	GJL-300	Ft 30 D	0130	G30	FG30		Sc 30	
0.6035	FC350	GG35	A48 50 B	Grade 350	GJL-350	Ft 35 D	0135	G35	FG35		Sc 35	
0.6040	FC400	GG40	A48 60 B	Grade 400	GJL-400	Ft 40 D	0140	G40	FC40		Sc 40	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 20 Malleable cast iron Pearlitic HB 230 HRc 21</p>												
0.8145	FCMW370	GTS-45	A220-40010	P 440-7	GJMB450-6	MN 450	0852	GMN 45				
0.8155	FCMP490	GTS-55	50005	P 510-4	GJMB-550-4	MP 50-5	0854	GMN 55			Kc 60-3	
0.8165	FCMP590	GTS-65	70003	P 570-3	GJMB-650-2	MN 650-3	0856	GMN 65				
0.8170	FCMP690	GTS-70	90001	P 690-2	GJMB-700-2	MN 700-2	0862	GMN 70			Kc 70-2	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 17 Nodular cast iron Ferritic HB 160 HRc 3</p>												
0.7033	FCD350-22L	GGG353	-	350/22L40	GJS-350-22-LT	FGS 370-17	0717-15	-				
0.7040	FCD400	GGG40	60-40-18	SNG 420-12	GJS-400-15	FCS 400-12	0717-02	GS 400-12	FG E38-17	F32800	Vc 42-12	
0.7043	FCD 370	GGG403	60-40-18	SNG 370-17	GJS-400-18-LT	FGS 370-17	0717-12	GSO 42-17			Vc 42-12	
0.6040	FC400	GG40	A48 60 B	Grade 400	GJL-400	Ft 40 D	0140	G40	FC40		Sc 40	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<p><b>K</b> VDI 3323 18 Nodular cast iron Pearlitic HB 250 HRc 25</p>												
0.7050	FCD500	GGG50	80-55-06	SNG 500-7	GJS-500-7	FGS 500-7	0727-02	GS 500-7	FG E50-7	F33100	Vc 50-2	
0.7060	FCD600	GGG60	80-55-06	SNG 600-3	GJS-600-3	FGS 600-3	0732-03	GS 600-3	FG E60-2		Vc 60-2	
0.7070	FCD700	GGG70	100-70-03	SNG 700-2	GJS-700-2	FGS 700-2	0737-01	GS 700-2	FG S70-2	F34800	Vc 70-2	
0.7652	FCDA-NiMn 137	GGG NiMn 13-7	-	Grade S6	GJSA-XNiMn 13-7	FGS Ni13 Mn7	0772	-			Nodumag	
0.7660		GGG NiCr 20-2	A436 D2	Grade S2	GJSA-XNiCr 20-2	FGS Ni20 Cr2	0776	-			Ni-Resist D-2	



Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 21</b> Material Description: Aluminum-wrought alloy; Composition / Structure / Heat Treatment: Not Curable; HB: 60; HRc:												
3.0205		A199	A199									
3.0255	(A1050)	A199.5	1000	L31		A59050C					D1	
3.3315		AlMg1										

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 24</b> Material Description: Aluminum-cast, alloyed; Composition / Structure / Heat Treatment: ≤ 12% Si, Curable, Hardened; HB: 90; HRc:												
2.1871		G-AlCu4TiMg										
3.1754		G-AlCu5Ni1,5										
3.2371		G-AlSi7Mg	4218B									AK8
3.2373	C4BS	G-AlSi9MgWA	SC64D				A-57G	4251				AK9
3.2381		G-AlSi10Mg										AK12
3.5106		G-MgAg3SEZr1	QE22	mag12								
		G-ALMG5	GD-AISI12	LM5			A-SU12	4252				

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 22</b> Material Description: Aluminum-wrought alloy; Composition / Structure / Heat Treatment: Curable, Hardened; HB: 100; HRc:												
3.1325		AlCuMg1									AD35	
3.1655	A2011	AlCuSiPb										
3.2315		AlMgSi1										AK9
3.4345		AlZnMgCuO,5	7050	L86		AZ4GU/9051		811-04				
3.4365	7075	AlZnMgCu1,5	7075	7075		7075		AlZn5.8MgCuCr			B95	

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 26</b> Material Description: Copper and Copper Alloys (Bronze / Brass); Composition / Structure / Heat Treatment: Cutting alloys, PB>1%; HB: 110; HRc:												
2.0375		CuZn36Pb3										LS60-2
2.1090		G-CuSn75pb	C93200					U-EZ5pb4				
2.1096		G-CuSn5ZnPB	c83600	LG2								
2.1098		G-CuSn2Znpb	C83600									
2.1182		G-CuPb15Sn	C23000	LB1				U-pb15E8				

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 23</b> Material Description: Aluminum-cast, alloyed; Composition / Structure / Heat Treatment: ≤ 12% Si, Not Curable; HB: 75; HRc:												
3.2163		G-AlSi9Cu3									VAL8	
3.2382		GD-AISI10Mg										
3.2383		G-AISI0Mg(Cu)	A360.2	LM9				4253				
3.2581		G-AISI12										
3.3561		G-AlMg5										
3.5101		G-MgZn4sE1Zr1	ZE41	MAG5								
3.5103		MgSE3Zn27r1	EZ33	MAG6		G-TR3Z2						
3.5812		G-MgAl8Zn1	AZ81	NMAG1								
3.5912		G-MgAl9Zn1	AZ91	MAG7								
			A356-72	2789		NFA32-201						
A5052			356.1	LM25				4244				AK7
		G-AISI12	A413.2	LM6				4261				
ADC12		G-AISI12(Cu)	A413.1	LM20				4260				AK12
A6061		GD-AISI12	A413.0					4247				
A7075		GD-AISI8Cu3	A380.1	LM24				4250				

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 27</b> Material Description: Copper and copper alloys (Bronze / Brass); Composition / Structure / Heat Treatment: CuZn, CuSnZn (Brass); HB: 90; HRc:												
2.0240	C2300	CuZn15										L90
2.0321		CuZn37	C27200	cz108				CuZn36,CuZn37	C2700			L63
2.0590		G-CuZn40Fe										
2.0592		G-CuZn35Al1	C86500	U-Z36N3				HTB1				
2.0596		G-CuZn34Al2	C86200	HTB1				U-Z36N3				LTs23AD
2.1293		CuCrZr	C18200	CC102				U-Cr0-8Zr				

Mat'l No.	JIS	DIN	AISI/ASTM/SAE	BS	EN	Composition / Structure / Heat Treatment					HB	HRc
						AFNOR	SS	UNI	UNE / IHA	UNS		
<b>N</b> <b>VDI 3323 28</b> Material Description: Copper and copper alloys (Bronze / Brass); Composition / Structure / Heat Treatment: CuSn, lead-free copper and electrolytic copper; HB: 100; HRc:												
2.0060		E-Cu57										
2.0966		CuAl10Ni5Fe4	C63000	Ca104				U-A10N				BrAD
2.0975		G-CuAl10Ni	B-148-52									
2.1050		G-CuSn10	c90700	CT1								
2.1052		G-CuSn12	C90800	pb2				UE12P				
2.1292		G-CuCrF35	C81500	CC1-FF								



Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 31</b> Heat resistant super alloys    Fe Based, Annealed    HB 200    HRc 15												
1.4558	NCF 800TB	X2NiCrAlTi3220	N08800	NA15								
1.4562		X1NiCrMoCu32287	N08031									
1.4563		X1NiCrMoCuN31274	N08028			Z1NCUDU31-27-03	2584				EK77	
1.4864	SUH330	X12NiCrSi36-16	330	NA17		Z12NCS37-18					N08330	
1.4865	SCH15	GX40NiCrSi38-18		330C40				XG50NiCr3919			J94605	
1.4958		X5NiCrAlTi3120										

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 32</b> Heat resistant super alloys    Fe Based, Aged    HB 280    HRc 30												
1.4977		X40CoCrNi2020				Z42CNKDWNb						

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 33</b> Heat resistant super alloys    Ni or Co Based, Annealed    HB 250    HRc 25												
2.4360		NiCu30Fe		NA13		NU30					N04400	Monel400
2.4603		NiCr 30 FeMo	5390A			NC22FeD						Hastelloy G-30
2.4610		NiMo16Cr16Ti									N26455	HastelloyC-4
2.4630		NiCr20Ti		HR5,203-4		NC20T					N06075	Nimonic75
2.4631	NCF 80A	NiCr20TiAl		HR40		NC20TA					N07080	KHN77YrR Nimonic 80A
2.4642	NCF 690	NiCr29Fe				Nnc30Fe					N06690	Inconel 690
2.4856		NiCr22Mo9Nb		NA21		NC22FeDNb					N06625	Inconel 625
2.4858		NiCr21Mo		NA16		NC21FeDU					N08825	KHN38VT Incoloy 825

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 34</b> Heat resistant super alloys    Ni or Co Based, Aged    HB 350    HRc 38												
2.4375		NiCu30Al	4676	NA18		NU30AT					N05500	MonelK500
2.4662		NiFe35Cr14MoTi	5660			ZSNCDT42					N09901	Incoloy 901
2.4668		NiCr19Fe19NbMo	5383	HR8		NC19eNB					N07718	Inconel 718
2.4670		S-NiCr13Al16MoNb	5391	Mar-46		NC12AD						Nimocast 713
2.4694		NiCr16Fe7TiAl									N07751	Inconel 751
2.4955		NiFe25Cr20NbTi										
2.4964		CoCr20W15Ni	5772			KC20WN						Haynes 25
		CoCr22W14Ni	AMS 5772			KC22WN						

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 35</b> Heat resistant super alloys    Ni or Co Based, Cast    HB 320    HRc 34												
2.4669		NiCr15Fe7TiAl				NC15TNbA					N07750	Inconel X750
2.4685		G-NiMo28									N10665	Hastelloy B
2.4810		G-NiMo30										Hastelloy C
2.4973		NiCr19Co11MoTi	AMS 5399			NC19KDT					VT5-1	
3.7115		TiAl5Sn2									R54520	VT1-00 ATI Grade 6

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 36</b> Titanium alloys    Pure Titanium    HB 400 Rm												
2.4674		NiCo15Cr10MoAlTi	AMS 5397								N13100	IN 100
3.7025		Ti1	R50250	2TA1							R50250	ATI 30 CP Gr. 1
3.7225		Ti1pd	R52250	TP1							R52250	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS		
<b>S</b> <b>VDI 3323 37</b> Titanium alloys    Alpha + Beta Alloys, Hardened    HB 1050 Rm												
3.7124		TiCu2		2TA21-24								
3.7145		TiAl6Sn2Zr4Mo2Si	R54620								R54620	
3.7165		TiAl6V4	AMS R56400	TA10-13		T-A6V						VT6
3.7185		TiAl4Mo4Sn2		TA45-51								
3.7195		TiAl3V2.5									R56320	ATI 3-2.5
		TiAl4Mo4Sn4Si0.5										
		TiAl5Sn2.5	AMS R54520	TA14/17		T-A5E						
		Ti6Al4VELI	AMS R56401	TA11								




Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 2em; font-weight: bold;">H</div> <div style="text-align: center;">                     VDI 3323 <b>38</b> </div> <div style="text-align: center;">                     Material Description Hardened steel                 </div> <div style="text-align: center;">                     Composition / Structure / Heat Treatment Hardened                 </div> <div style="text-align: center;">                     HB 550                 </div> <div style="text-align: center;">                     HRc 55                 </div> </div>												
1.1231	S 70 C-CSP	Ck 67	1070	060 A 67	C 67S	XC 68	1770	C 70	F 5103		70	
1.1248	C 75	Ck 75	1078, 1080	060 A 78	C 75S	XC 75	1774	C 75	F 5107		75	
1.1274	SUP 4	Ck 101	1095	060 A 96	C 100S	XC 100	1870	C 100	F 5117			
1.1545	SK 3	C 105 W1	W1	BW 2	C 105U	Y1 105	1880	C 100 KU	F 5118		U10A	
1.2762		75CrMoNiW67	-	-	-	-	-	-	-			
1.3401	SCMnH1	GX120Mn12	A128(A)			Z120M12	2183	GX120Mn12	F 8251		110G13L	
1.4021	SUS 420 J1	X 20 Cr 13	420	420 S 37	X 20 Cr 13	Z 20 C 13	2303	X 20 Cr 13	F 5261		20KH13	ATI 420
1.4109	SUS 440 A	X 65 CrMo 14	440 A	-	X 70 CrMo 15	Z 70 D 14	-	-				ATI 440A
1.4112	SUS 440 B	X 90 CrMoV 18	440 B	409 S 19	X 90 CrMoV 18	Z 2 CND 18 05	2327	X CrTi 12				
1.4125	SUS 440 C	X 105 CrMo 17	440 C	-	X 105 CrMo 17	Z 100 CD 17	-	X 105 CrMo 17			95KH18	ATI 440C
1.6746		32NiCrMo14-5	-	832M31	32NiCrMo145	35NCD14	-	-				
1.7176	SUP9(A)	55Cr3	5155	527A60	48	55C3	2253	55Cr3				
1.7225	SCM 440 (H)	42CrMo4	4140	708 M 40	42 CrMo 4	42 CD 4	2244	42 CrMo 4	F 1252		38HM	

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 2em; font-weight: bold;">H</div> <div style="text-align: center;">                     VDI 3323 <b>40</b> </div> <div style="text-align: center;">                     Material Description Chilled cast iron                 </div> <div style="text-align: center;">                     Composition / Structure / Heat Treatment Cast                 </div> <div style="text-align: center;">                     HB 400                 </div> <div style="text-align: center;">                     HRc 42                 </div> </div>												
0.9620		GX260NiCr42	A532 IB	Grade 2 A	GJN-HV520	FB Ni4 Cr2 BC	0512	-		F45001		Ni-Hard2
0.9625		GX330NiCr42	A532 IA	Grade 2 B	GJN-HV550	FB Ni4 Cr2 HC	0513	-		F45000		Ni-Hard1
0.9630		GX300CrNiSi9.5.2	A532 ID	Grade 2 C	GJN-HV600	FB Cr9 Ni5	0457	-		F45003		Ni-Hard 4
0.9640		GX300CrMoNi1.5.21	-	-	-	-	-	-		F45005		
0.9650		GX260Cr27	-	Grade 3 D	-	-	0466	-				
0.9655		GX300CrNiMo271	-	Grade 3 E	-	-	-	-			20C 25N20S2	
1.4841	SUH 310	X15CrNiSi25-20	310	314S31	X 15 CrNiSi 25 20	Z15CNS25-20	-	-		S31400		Cronifer 2520

Mat'l No.	JIS	DIN	Material Description			Composition / Structure / Heat Treatment					HB	HRc
			AISI/ASTM/SAE	BS	EN	AFNOR	SS	UNI	UNE / IHA	UNS	GOST	Brands
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 2em; font-weight: bold;">H</div> <div style="text-align: center;">                     VDI 3323 <b>41</b> </div> <div style="text-align: center;">                     Material Description Hardened cast iron                 </div> <div style="text-align: center;">                     Composition / Structure / Heat Treatment Hardened                 </div> <div style="text-align: center;">                     HB 550                 </div> <div style="text-align: center;">                     HRc 55                 </div> </div>												
0.9635		GX300CrMo 15 3	-	-	-	-	-	-				
0.9645		GX260CrMoNi 20 21	-	-	-	-	-	-		F45007		

MEMO



Large grid area for notes or memos.



## HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

### EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

### ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA	THAILAND		

### AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

### AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

**YG-1 CO., LTD.**

\* For more information on sales network, please contact the head office as below;

#### YG-1 HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

E-mail: yg1@yg1.kr

www.yg1.kr