

YE-ML20



MULTI-1 DRILLS

TiAlN Coated HSS-PM Drills

Wide range of work materials;
Carbon Steels, Alloy Steels, Structural Steels,
Hardened Steels(HRc 30-45), Cast Iron, Stainless
Steels, Aluminum and Titanium




MULTI-1 DRILLS

FEATURES & CUTTING CONDITION

Wide range of work materials




Carbon Steels, Alloy Steels, Structural Steels, Hardened Steels(HRc 30-45), Cast Iron, Stainless Steels, Aluminum and Titanium




Point Shape to Maximize Self-centering

► Excellent positioning - bushing is not necessary



Flute Design for the Best Chip Evacuation

► Prevent chip clogging and reduce axial thrust



Premium Powder Material with Excellent Toughness


► Improve cutting edge strength with higher stability and rigidity

RPM = rev./min.
FEED = mm/rev.


ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)							
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1	Non-alloy steel	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060
				FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30
			35	RPM	5570	3710	2790	2230	1860	1390	1110	930
	FEED			0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30	
	35		RPM	5570	3710	2790	2230	1860	1390	1110	930	
			FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30	
	6	Low alloy steel	35	RPM	5570	3710	2790	2230	1860	1390	1110	930
				FEED	0.03-0.06	0.08-0.12	0.09-0.15	0.12-0.18	0.14-0.20	0.18-0.24	0.18-0.28	0.20-0.30
			30	RPM	4770	3180	2390	1910	1590	1190	950	800
FEED	0.03-0.05			0.06-0.10	0.07-0.13	0.10-0.16	0.12-0.18	0.14-0.20	0.14-0.24	0.16-0.26		
25	RPM		3980	2650	1990	1590	1330	990	800	660		
	FEED		0.02-0.05	0.03-0.07	0.04-0.10	0.06-0.12	0.07-0.13	0.10-0.20	0.12-0.22	0.14-0.24		
20	RPM	3180	2120	1590	1270	1060	800	640	530			
	FEED	0.02-0.05	0.03-0.07	0.04-0.10	0.06-0.12	0.07-0.13	0.10-0.20	0.12-0.22	0.14-0.24			
M	12	Stainless steel	20	RPM	3180	2120	1590	1270	1060	800	640	530
				FEED	0.03-0.07	0.05-0.09	0.06-0.12	0.09-0.15	0.12-0.18	0.18-0.24	0.20-0.30	0.26-0.36
15	RPM		2390	1590	1190	950	800	600	480	400		
	FEED		0.02-0.05	0.03-0.07	0.04-0.10	0.06-0.12	0.07-0.13	0.10-0.20	0.12-0.22	0.14-0.24		
K	15	Grey cast iron	40	RPM	6370	4240	3180	2550	2120	1590	1270	1060
				FEED	0.04-0.10	0.07-0.13	0.09-0.15	0.12-0.18	0.13-0.19	0.18-0.24	0.20-0.30	0.22-0.32
N	21	Aluminum-wrought alloy	90	RPM	14320	9550	7160	5730	4770	3580	2860	2390
				FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73
	90		RPM	14320	9550	7160	5730	4770	3580	2860	2390	
			FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73	
	23	Aluminum-cast, alloyed	80	RPM	12730	8490	6370	5090	4240	3180	2550	2120
				FEED	0.13-0.17	0.23-0.27	0.27-0.33	0.33-0.39	0.40-0.46	0.45-0.51	0.51-0.61	0.63-0.73
70	RPM		11140	7430	5570	4460	3710	2790	2230	1860		
	FEED		0.10-0.14	0.15-0.19	0.20-0.26	0.24-0.30	0.28-0.34	0.30-0.36	0.34-0.44	0.36-0.46		
S	36	Titanium Alloys	5	RPM	800	530	400	320	270	200	160	130
				FEED	0.02-0.05	0.03-0.07	0.04-0.08	0.06-0.12	0.07-0.13	0.09-0.15	0.12-0.22	0.14-0.24

▶ Ø8.0mm, Steel

Tool	YG-1 CDRA03080	Competitor
O.D Size	Ø8.0	
Work Material	DIN: X155CrVMo121 AISI: D2 JIS: SKD11(HRc20)	
Cutting Speed	15 m/min. (49.2 ft/min.)	
RPM	600 rev./min.	
Feed	0.18 mm/rev. (0.0071 in/rev.)	
Drilling Method	Blind Hole / without Pecking	
Drilling Depth	24.0 mm (3XD)	
Cooling Method	External Cooling Water Soluble (9% Emulsion)	
Machine	Machining Center	

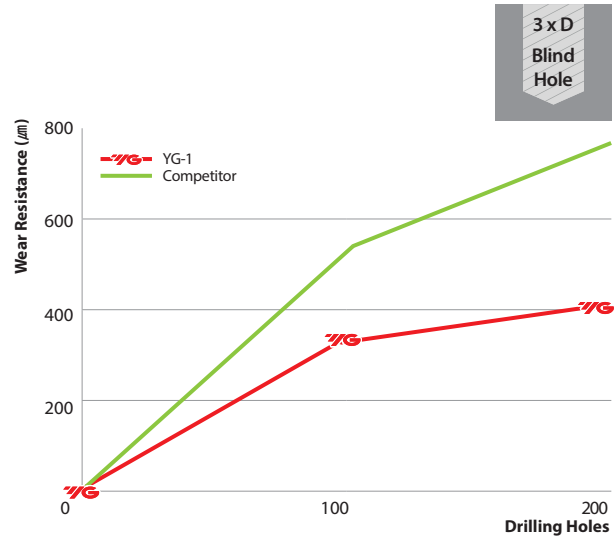

YG-1

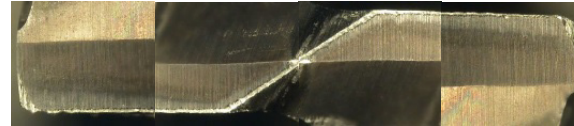


Competitor




▶ Ø8.0mm, Stainless Steel

Tool	YG-1 CDRA03080	Competitor
O.D Size	Ø8.0	
Work Material	DIN: X5CrNiMo17-12-2 AISI: 316 JIS: SUS316(HRc10)	
Cutting Speed	15 m/min. (49.2 ft/min.)	
RPM	600 rev./min.	
Feed	0.18 mm/rev. (0.0071 in/rev.)	
Drilling Method	Blind Hole / without Pecking	
Drilling Depth	24.0 mm (3XD)	
Cooling Method	External Cooling Water Soluble (9% Emulsion)	
Machine	Machining Center	

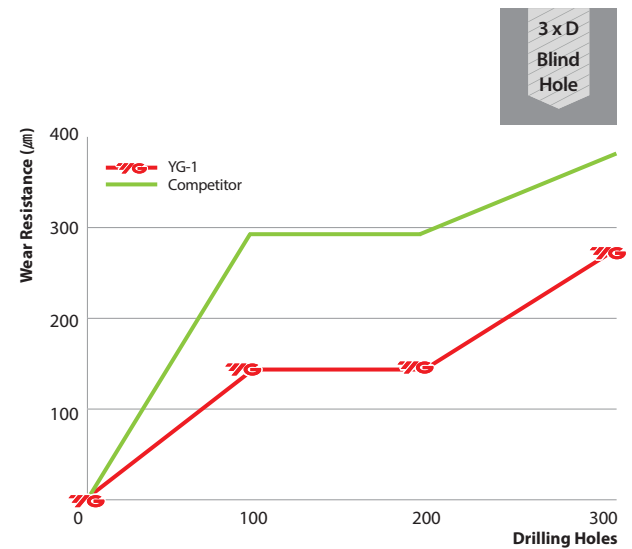

YG-1

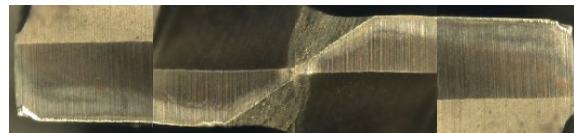


Competitor



HSS-PM MULTI-1 DRILLS

STUB CDRA03 SERIES

- ▶ **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc 30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.
- ▶ **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

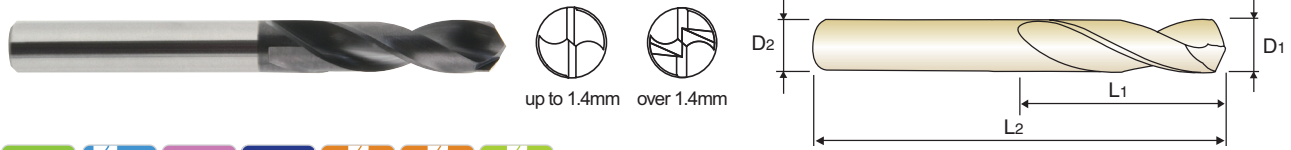

up to 1.9mm over 1.9mm

Unit: mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2
CDRA03010	1.00	3	6	38	CDRA03025	2.50	3	14	46	CDRA03040	4.00	4	22	54
CDRA03910	1.05	3	6	38	CDRA03925	2.55	3	14	46	CDRA03940	4.05	6	22	66
CDRA03011	1.10	3	7	39	CDRA03026	2.60	3	14	46	CDRA03041	4.10	6	22	66
CDRA03911	1.15	3	7	39	CDRA03926	2.65	3	14	46	CDRA03941	4.15	6	22	66
CDRA03012	1.20	3	8	40	CDRA03027	2.70	3	16	48	CDRA03042	4.20	6	22	66
CDRA03912	1.25	3	8	40	CDRA03927	2.75	3	16	48	CDRA03942	4.25	6	22	66
CDRA03013	1.30	3	8	40	CDRA03028	2.80	3	16	48	CDRA03043	4.30	6	24	68
CDRA03913	1.35	3	9	41	CDRA03928	2.85	3	16	48	CDRA03943	4.35	6	24	68
CDRA03014	1.40	3	9	41	CDRA03029	2.90	3	16	48	CDRA03044	4.40	6	24	68
CDRA03914	1.45	3	9	41	CDRA03929	2.95	3	16	48	CDRA03944	4.45	6	24	68
CDRA03015	1.50	3	9	41	CDRA03030	3.00	3	16	48	CDRA03045	4.50	6	24	68
CDRA03915	1.55	3	10	42	CDRA03930	3.05	4	18	50	CDRA03945	4.55	6	24	68
CDRA03016	1.60	3	10	42	CDRA03031	3.10	4	18	50	CDRA03046	4.60	6	24	68
CDRA03916	1.65	3	10	42	CDRA03931	3.15	4	18	50	CDRA03946	4.65	6	24	68
CDRA03017	1.70	3	10	42	CDRA03032	3.20	4	18	50	CDRA03047	4.70	6	24	68
CDRA03917	1.75	3	11	43	CDRA03932	3.25	4	18	50	CDRA03947	4.75	6	24	68
CDRA03018	1.80	3	11	43	CDRA03033	3.30	4	18	50	CDRA03048	4.80	6	26	70
CDRA03918	1.85	3	11	43	CDRA03933	3.35	4	18	50	CDRA03948	4.85	6	26	70
CDRA03019	1.90	3	11	43	CDRA03034	3.40	4	20	52	CDRA03049	4.90	6	26	70
CDRA03919	1.95	3	12	44	CDRA03934	3.45	4	20	52	CDRA03949	4.95	6	26	70
CDRA03020	2.00	3	12	44	CDRA03035	3.50	4	20	52	CDRA03050	5.00	6	26	70
CDRA03920	2.05	3	12	44	CDRA03935	3.55	4	20	52	CDRA03950	5.05	6	26	70
CDRA03021	2.10	3	12	44	CDRA03036	3.60	4	20	52	CDRA03051	5.10	6	26	70
CDRA03921	2.15	3	13	45	CDRA03936	3.65	4	20	52	CDRA03951	5.15	6	26	70
CDRA03022	2.20	3	13	45	CDRA03037	3.70	4	20	52	CDRA03052	5.20	6	26	70
CDRA03922	2.25	3	13	45	CDRA03937	3.75	4	20	52	CDRA03952	5.25	6	26	70
CDRA03023	2.30	3	13	45	CDRA03038	3.80	4	22	54	CDRA03053	5.30	6	26	70
CDRA03923	2.35	3	13	45	CDRA03938	3.85	4	22	54	CDRA03953	5.35	6	28	72
CDRA03024	2.40	3	14	46	CDRA03039	3.90	4	22	54	CDRA03054	5.40	6	28	72
CDRA03924	2.45	3	14	46	CDRA03939	3.95	4	22	54	CDRA03954	5.45	6	28	72


▶ NEXT PAGE

ISO	P																			M					K				
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron									
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20									
VDI 3323																													
HRc																													
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230									
Recommended	⊙	⊙	○			⊙	○	○	○			○		⊙	○														
ISO	N										S						H												
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron										
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41								
VDI 3323																													
HRc																													
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550								
Recommended	⊙	⊙	○	○												○													

HSS-PM MULTI-1 DRILLS

STUB CDRA03 SERIES

- ▶ **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc 30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.
- ▶ **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

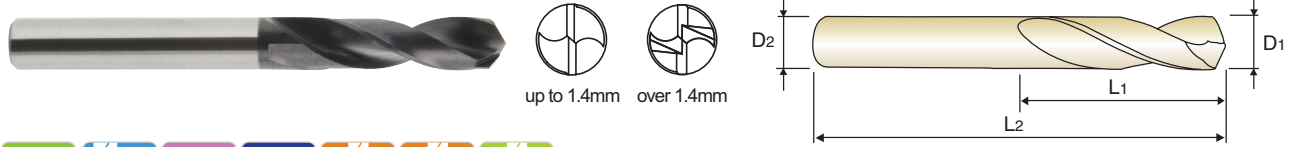

up to 1.9mm over 1.9mm

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2	TiAlN	D1	D2	L1	L2
CDRA03055	5.50	6	28	72	CDRA03080	8.00	8	37	81	CDRA03110	11.00	12	47	104
CDRA03955	5.55	6	28	72	CDRA03081	8.10	10	37	87	CDRA03111	11.10	12	47	104
CDRA03056	5.60	6	28	72	CDRA03082	8.20	10	37	87	CDRA03112	11.20	12	47	104
CDRA03956	5.65	6	28	72	CDRA03083	8.30	10	37	87	CDRA03113	11.30	12	47	104
CDRA03057	5.70	6	28	72	CDRA03084	8.40	10	37	87	CDRA03114	11.40	12	47	104
CDRA03957	5.75	6	28	72	CDRA03085	8.50	10	37	87	CDRA03115	11.50	12	47	104
CDRA03058	5.80	6	28	72	CDRA03086	8.60	10	40	90	CDRA03116	11.60	12	47	104
CDRA03958	5.85	6	28	72	CDRA03087	8.70	10	40	90	CDRA03117	11.70	12	47	104
CDRA03059	5.90	6	28	72	CDRA03088	8.80	10	40	90	CDRA03118	11.80	12	47	104
CDRA03959	5.95	6	28	72	CDRA03089	8.90	10	40	90	CDRA03119	11.90	12	51	108
CDRA03060	6.00	6	28	72	CDRA03090	9.00	10	40	90	CDRA03120	12.00	12	51	108
CDRA03061	6.10	8	31	75	CDRA03091	9.10	10	40	90	CDRA03121	12.10	12	51	108
CDRA03062	6.20	8	31	75	CDRA03092	9.20	10	40	90	CDRA03122	12.20	12	51	108
CDRA03063	6.30	8	31	75	CDRA03093	9.30	10	40	90	CDRA03123	12.30	12	51	108
CDRA03064	6.40	8	31	75	CDRA03094	9.40	10	40	90	CDRA03124	12.40	12	51	108
CDRA03065	6.50	8	31	75	CDRA03095	9.50	10	40	90	CDRA03125	12.50	12	51	108
CDRA03066	6.60	8	31	75	CDRA03096	9.60	10	43	93	CDRA03126	12.60	12	51	108
CDRA03067	6.70	8	31	75	CDRA03097	9.70	10	43	93	CDRA03127	12.70	12	51	108
CDRA03068	6.80	8	34	78	CDRA03098	9.80	10	43	93	CDRA03128	12.80	12	51	108
CDRA03069	6.90	8	34	78	CDRA03099	9.90	10	43	93	CDRA03129	12.90	12	51	108
CDRA03070	7.00	8	34	78	CDRA03100	10.00	10	43	93	CDRA03130	13.00	12	51	108
CDRA03071	7.10	8	34	78	CDRA03101	10.10	12	43	100					
CDRA03072	7.20	8	34	78	CDRA03102	10.20	12	43	100					
CDRA03073	7.30	8	34	78	CDRA03103	10.30	12	43	100					
CDRA03074	7.40	8	34	78	CDRA03104	10.40	12	43	100					
CDRA03075	7.50	8	34	78	CDRA03105	10.50	12	43	100					
CDRA03076	7.60	8	37	81	CDRA03106	10.60	12	43	100					
CDRA03077	7.70	8	37	81	CDRA03107	10.70	12	47	104					
CDRA03078	7.80	8	37	81	CDRA03108	10.80	12	47	104					
CDRA03079	7.90	8	37	81	CDRA03109	10.90	12	47	104					


◎ : Excellent ○ : Good

ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	○			◎	○	○	○					◎	○	○							
ISO	N										S					H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	◎	◎	○	○												○							

HSS-PM MULTI-1 DRILLS

JOBBER CDRA04 SERIES

- ▶ **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc 30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.
- ▶ **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

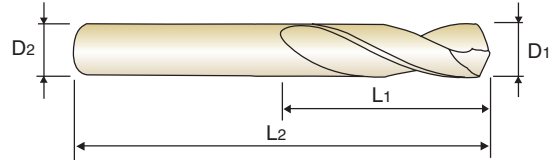

P. 2

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA04020	2.0	3	24	56
CDRA04021	2.1	3	24	56
CDRA04022	2.2	3	25	56
CDRA04023	2.3	3	25	56
CDRA04024	2.4	3	30	61
CDRA04025	2.5	3	30	61
CDRA04026	2.6	3	30	61
CDRA04027	2.7	3	33	64
CDRA04028	2.8	3	33	64
CDRA04029	2.9	3	33	64
CDRA04030	3.0	3	33	64
CDRA04031	3.1	4	36	68
CDRA04032	3.2	4	36	68
CDRA04033	3.3	4	36	68
CDRA04034	3.4	4	39	71
CDRA04035	3.5	4	39	71
CDRA04036	3.6	4	39	71
CDRA04037	3.7	4	39	71
CDRA04038	3.8	4	43	75
CDRA04039	3.9	4	43	75
CDRA04040	4.0	4	43	75
CDRA04041	4.1	6	43	85
CDRA04042	4.2	6	43	85
CDRA04043	4.3	6	47	89
CDRA04044	4.4	6	47	89
CDRA04045	4.5	6	47	89
CDRA04046	4.6	6	47	89
CDRA04047	4.7	6	47	89
CDRA04048	4.8	6	52	94
CDRA04049	4.9	6	52	94

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
CDRA04050	5.0	6	52	94
CDRA04051	5.1	6	52	94
CDRA04052	5.2	6	52	94
CDRA04053	5.3	6	52	94
CDRA04054	5.4	6	57	99
CDRA04055	5.5	6	57	99
CDRA04056	5.6	6	57	99
CDRA04057	5.7	6	57	99
CDRA04058	5.8	6	57	99
CDRA04059	5.9	6	57	99
ZCDRA04060	6.0	6	57	99
CDRA04061	6.1	8	63	107
CDRA04062	6.2	8	63	107
CDRA04063	6.3	8	63	107
CDRA04064	6.4	8	63	107
CDRA04065	6.5	8	63	107
CDRA04066	6.6	8	63	107
CDRA04067	6.7	8	63	107
CDRA04068	6.8	8	69	113
CDRA04069	6.9	8	69	113
CDRA04070	7.0	8	69	113
CDRA04071	7.1	8	69	113
CDRA04072	7.2	8	69	113
CDRA04073	7.3	8	69	113
CDRA04074	7.4	8	69	113
CDRA04075	7.5	8	69	113
CDRA04076	7.6	8	75	119
CDRA04077	7.7	8	75	119
CDRA04078	7.8	8	75	119
CDRA04079	7.9	8	75	119


▶ NEXT PAGE

ISO	P										M				K											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron							
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						
VDI 3323	13	25	28	32	10	29	32	38	10	11	15	23	10	10	26	3	25	21	21	21						
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230						
Recommended	◎	◎	○			◎	○	○	○				◎	○												
ISO	N										S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○												○										

HSS-PM MULTI-1 DRILLS

JOBBER CDRA04 SERIES

- ▶ **Application** : Structural steels, Carbon steels, Alloy steels, Pre-hardened steels, Mold steels, Stainless steels, Hardened steels(HRc 30-45), Cast iron, Aluminum alloys, Nonferrous alloys, Titanium.
- ▶ **Advantage** : Point shape to maximize self-centering.
Flute design for the best chip evacuation.
Premium powder materials with excellent toughness.

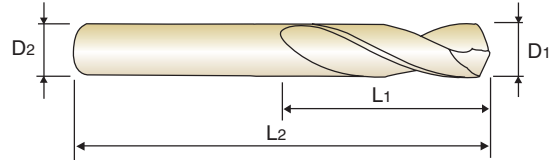

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA04080	8.0	8	75	119
CDRA04081	8.1	10	75	125
CDRA04082	8.2	10	75	125
CDRA04083	8.3	10	75	125
CDRA04084	8.4	10	75	125
CDRA04085	8.5	10	75	125
CDRA04086	8.6	10	81	131
CDRA04087	8.7	10	81	131
CDRA04088	8.8	10	81	131
CDRA04089	8.9	10	81	131
CDRA04090	9.0	10	81	131
CDRA04091	9.1	10	81	131
CDRA04092	9.2	10	81	131
CDRA04093	9.3	10	81	131
CDRA04094	9.4	10	81	131
CDRA04095	9.5	10	81	131
CDRA04096	9.6	10	87	137
CDRA04097	9.7	10	87	137
CDRA04098	9.8	10	87	137
CDRA04099	9.9	10	87	137
CDRA04100	10.0	10	87	137
CDRA04101	10.1	12	87	144
CDRA04102	10.2	12	87	144
CDRA04103	10.3	12	87	144
CDRA04104	10.4	12	87	144
CDRA04105	10.5	12	87	144

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
CDRA04106	10.6	12	87	144
CDRA04107	10.7	12	94	151
CDRA04108	10.8	12	94	151
CDRA04109	10.9	12	94	151
CDRA04110	11.0	12	94	151
CDRA04111	11.1	12	94	151
CDRA04112	11.2	12	94	151
CDRA04113	11.3	12	94	151
CDRA04114	11.4	12	94	151
CDRA04115	11.5	12	94	151
CDRA04116	11.6	12	94	151
CDRA04117	11.7	12	94	151
CDRA04118	11.8	12	94	151
CDRA04119	11.9	12	101	158
CDRA04120	12.0	12	101	158
CDRA04121	12.1	12	101	158
CDRA04122	12.2	12	101	158
CDRA04123	12.3	12	101	158
CDRA04124	12.4	12	101	158
CDRA04125	12.5	12	101	158
CDRA04126	12.6	12	101	158
CDRA04127	12.7	12	101	158
CDRA04128	12.8	12	101	158
CDRA04129	12.9	12	101	158
CDRA04130	13.0	12	101	158

◎ : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
VDI 3323																						
HRc																						
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	○			◎	○	○	○			○		◎	○	○						

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○												○					

YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice. Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application. YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets

YG1ML200108003