

YE-VP24

EUROPE



W G

V7 Plus

**HIGH PERFORMANCE
SOLID CARBIDE END MILLS
For Steels, Cast Iron and Stainless Steels**

PRODUCT FEATURES



- Chatter and Harmonics Reduced for **Improved Stability and Better Finishing**
- Special Design of Flute Geometry for **Optimal Chip Formation and Chip Evacuation**
- Engineered Coating Technology to **Reduced Wear and Increase Heat Resistance**
- Enhanced Corner Geometry for **Longer Tool Life**

PRODUCT GEOMETRY

Corner Geometries

YG-1's High Performance Corner Geometries Including Corner Radius, applied for Longer Tool Life with Higher Cutting Speed and Heavy Cutting

Unequal Index

Exclusively Designed Unique Geometry applied to Reduce Vibration and also to achieve Excellent Chip Evacuation with Better Surface Finish

Multiple Helix

Multiple Helix Designed for Optimal Chip Formation and Chip Evacuation Concluding Faster and Heavier Cutting making Higher Productivity

Ultra Micro grain Carbide

Premium Carbide Substrate Achieving Exceptional Wear Resistance


V7 PLUS 6 FLUTE END MILLS



THE BEST CHATTER FREE TOOL FOR HIGH SPEED

- Unique geometry of the variable pitch provides the best chatter free tool for high speed and also trochoidal milling
- Several slot widths can be used with the same tool diameter in an efficient way
- Provides longer tool life and higher productivity on most materials
- Trochoidal milling is a programming technique applying a small radial width of cut with also higher cutting speed and feed per tooth

Trochoidal Milling performs better than conventional ways because it has..

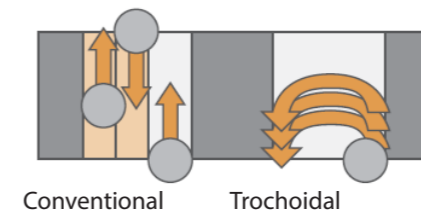

- Lower Cutting Force from smaller arc engagement
- Longer Tool Life from more flutes, and deeper cutting depth
- Higher Stability, Lower Vibration and Excellent Chip Evacuation

V7 PLUS 6 FLUTE CHIP SPLITTER

Corner Geometries

YG-1's High Performance Corner Geometries Including Corner Radius, applied for Longer Tool Life with Higher Cutting Speed

Unequal Index

Exclusively Designed Unique Geometry applied to Reduce Vibration and also to achieve Excellent Surface Finish

Chip Splitters



Special Chip Splitter Design Shorter Chip Length at High Axial Machining, improving Chip Removal from both the Component and the Machine

GUIDE TO ICONS

CARBIDE The tool is made of Nanograin carbide	4 5 6 No. of Flutes	35°/37° 35°/37° 45° 41°~45° Helix Angle	PLAIN FLAT Type of Shank
R ±0.02 Tolerance of Ball Radius	C x 45° Chamfer Angle	Y Coating AITiN Type of Coating	Cutting Condition

CASE STUDY



TEST I 4 Flute

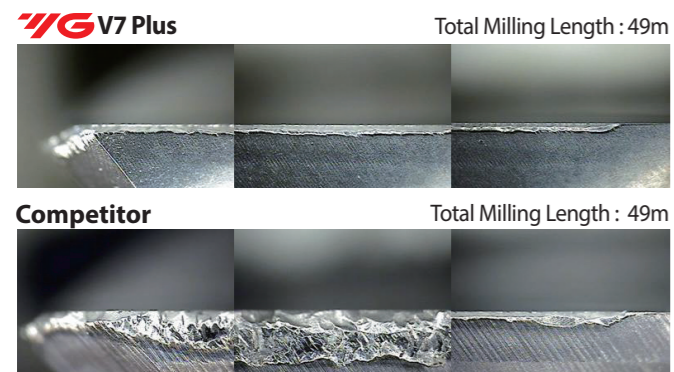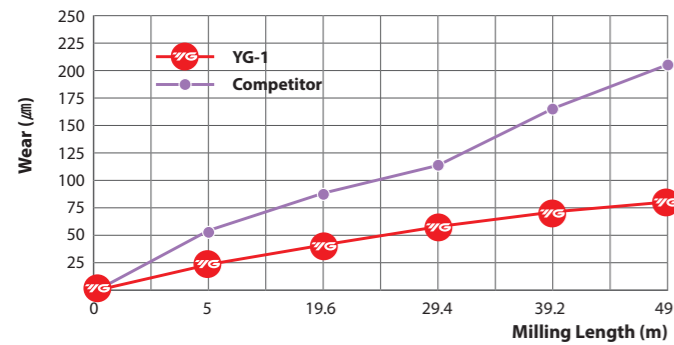

Cutting Condition (Side Cutting)

Tool	V7 Plus	Competitor
Size	Ø10 x Ø10 x 22 x 72	
Work Material	- DIN : C45 - WR : 1.0503 - JIS : S45C(HRc30)	
Vc (m/min.)	230.09	
RPM (rev./min.)	7,324	
Feed (mm/min.)	1,464	
Feed per tooth (mm/tooth)	0.05	
Milling Depth (mm)	Axial: 10 / Radial : 3	
Coolant	Wet Cut	
Overhang (mm)	34	
Machine	Machining Center	



TEST III 6 Flute Chip Splitter

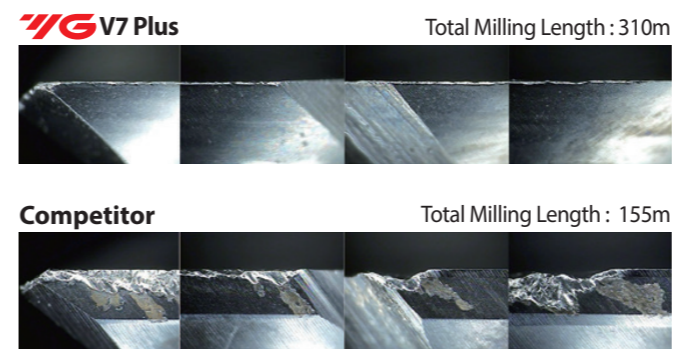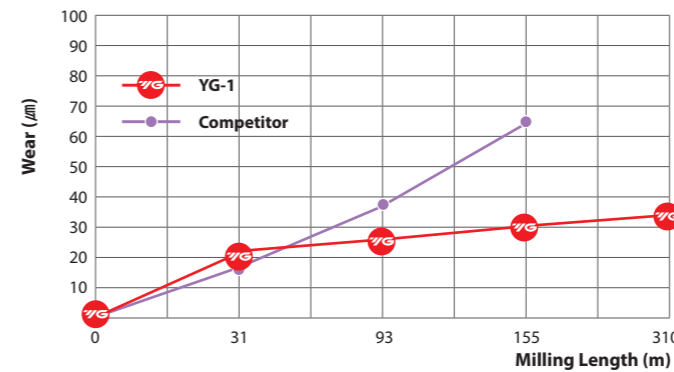

Cutting Condition (Trochoidal Cutting)

Tool	V7 Plus Chip Splitter	Competitor
Size	Ø12 x Ø12 x 48 x 120	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRc 30 /HB 286)	
Vc (m/min.)	220.01	
RPM (rev./min.)	5,836	
Feed (mm/min.)	3,151	
Feed per tooth (mm/tooth)	Trochoidal Cutting	
Milling Depth (mm)	Axial: 36 Radial: 0.6	
Coolant	Wet Cut	
Overhang (mm)	56	
Machine	Machining Center	



TEST II 4 Flute

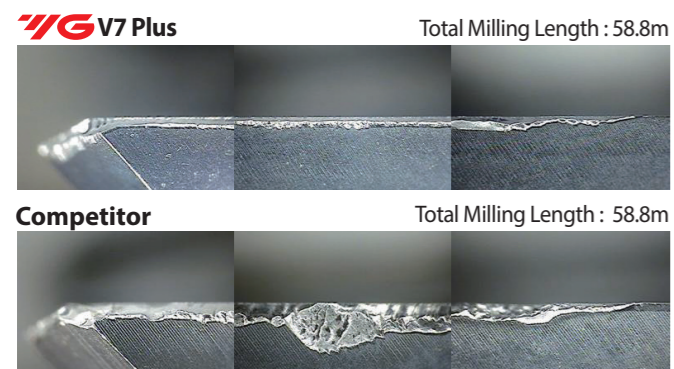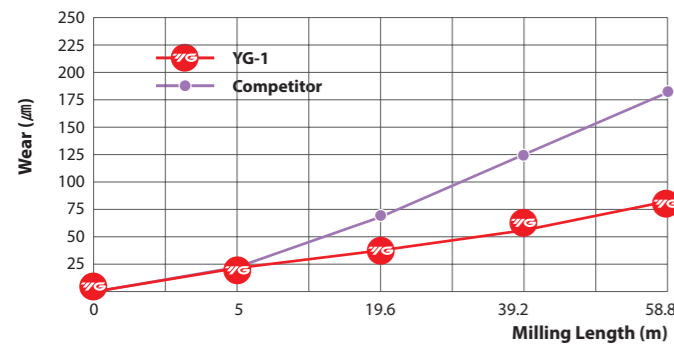

Cutting Condition (Side Cutting)

Tool	V7 Plus	Competitor
Size	Ø16 x Ø16 x 32 x 92	
Work Material	-DIN: C45 -WR: 1.0503 -JIS: S45C (HRc 30 / HB 286)	
Vc (m/min.)	160.00	
RPM (rev./min.)	3,183	
Feed (mm/min.)	573	
Feed per tooth (mm/tooth)	0.05	
Milling Depth (mm)	Axial: 14, Radial: 3	
Coolant	Wet Cut	
Overhang (mm)	45	
Machine	Machining Center	

TEST IV 6 Flute

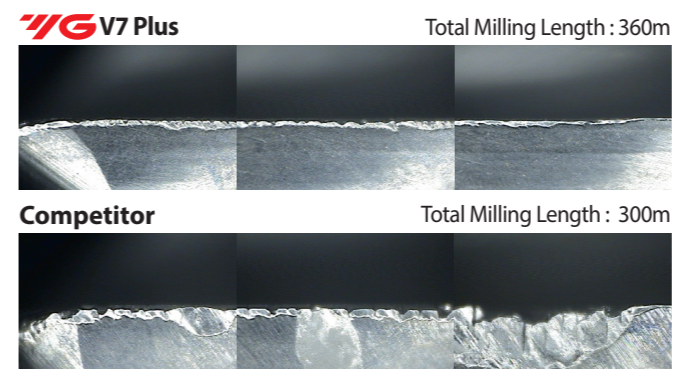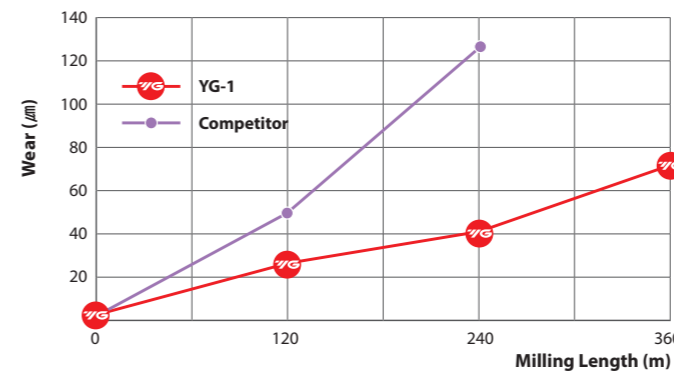


Cutting Condition (Trochoidal Cutting)

Tool	V7 Plus	Competitor
Size	Ø12(R1) x Ø12 x 26 x 83	
Work Material	- DIN : C45 - WR : 1.0503 - JIS : S45C(HRc30)	
Vc (m/min.)	278.67	
RPM (rev./min.)	7,392	
Feed (mm/min.)	7,495	
Feed per tooth (mm/tooth)	0.17	
Milling Depth (mm)	Axial: 24(2D) Radial: 0.6(0.05D)	
Coolant	Wet Cut	
Overhang (mm)	36	
Machine	Machining Center	

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE BALL NOSE LONG LENGTH**

SERIES
PLAIN SHANK **GMG55**
FLAT SHANK **GMG56**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

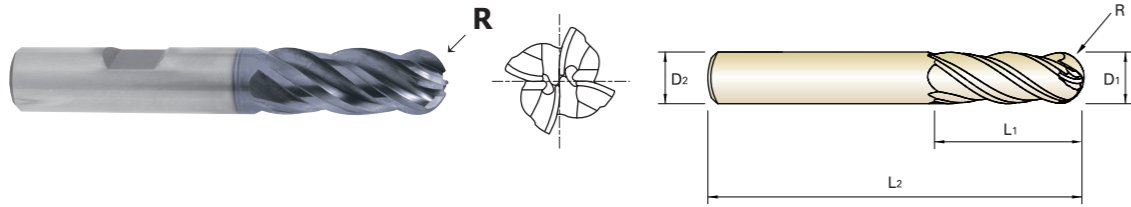

Unit : mm


EDP No.		Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG55030	GMG56030	R1.5	3.0	6	8	57
GMG55040	GMG56040	R2.0	4.0	6	11	57
GMG55050	GMG56050	R2.5	5.0	6	13	57
GMG55060	GMG56060	R3.0	6.0	6	13	57
GMG55080	GMG56080	R4.0	8.0	8	19	63
GMG55100	GMG56100	R5.0	10.0	10	22	72
GMG55120	GMG56120	R6.0	12.0	12	26	83
GMG55160	GMG56160	R8.0	16.0	16	32	92
GMG55200	GMG56200	R10.0	20.0	20	38	104
GMG55250	GMG56250	R12.5	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12 : h6

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE CORNER RADIUS SHORT LENGTH**

SERIES
PLAIN SHANK **GMF54**
FLAT SHANK **GMF55**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

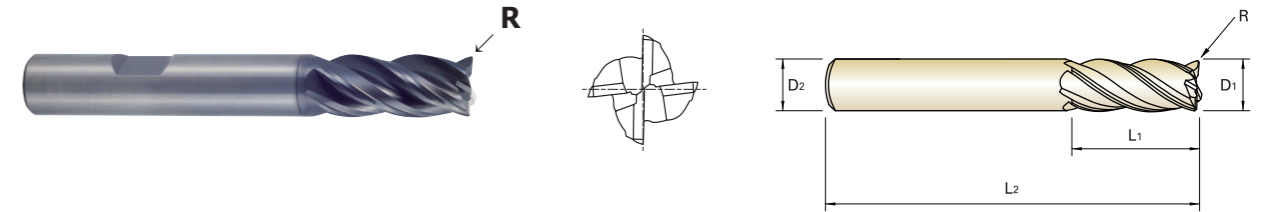

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF54030	GMF55030	R0.3	3.0	6	7	54
GMF54901	GMF55901	R0.5	3.0	6	7	54
GMF54040	GMF55040	R0.3	4.0	6	8	54
GMF54902	GMF55902	R0.5	4.0	6	8	54
GMF54050	GMF55050	R0.3	5.0	6	10	54
GMF54903	GMF55903	R0.5	5.0	6	10	54
GMF54060	GMF55060	R0.3	6.0	6	10	54
GMF54904	GMF55904	R0.5	6.0	6	10	54
GMF54905	GMF55905	R1.0	6.0	6	10	54
GMF54080	GMF55080	R0.5	8.0	8	12	58
GMF54906	GMF55906	R1.0	8.0	8	12	58
GMF54100	GMF55100	R0.5	10.0	10	14	66
GMF54907	GMF55907	R1.0	10.0	10	14	66
GMF54120	GMF55120	R0.5	12.0	12	16	73
GMF54908	GMF55908	R1.0	12.0	12	16	73
GMF54909	GMF55909	R2.0	12.0	12	16	73
GMF54140	GMF55140	R0.5	14.0	14	18	75
GMF54160	GMF55160	R1.0	16.0	16	22	82
GMF54912	GMF55912	R2.0	16.0	16	22	82
GMF54913	GMF55913	R3.0	16.0	16	22	82
GMF54180	GMF55180	R1.0	18.0	18	24	84
GMF54200	GMF55200	R1.0	20.0	20	26	92
GMF54916	GMF55916	R2.0	20.0	20	26	92
GMF54917	GMF55917	R3.0	20.0	20	26	92

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	10	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC						15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	10	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC						15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE CORNER RADIUS LONG LENGTH**

SERIES
PLAIN SHANK **GMF58**
FLAT SHANK **GMF59**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

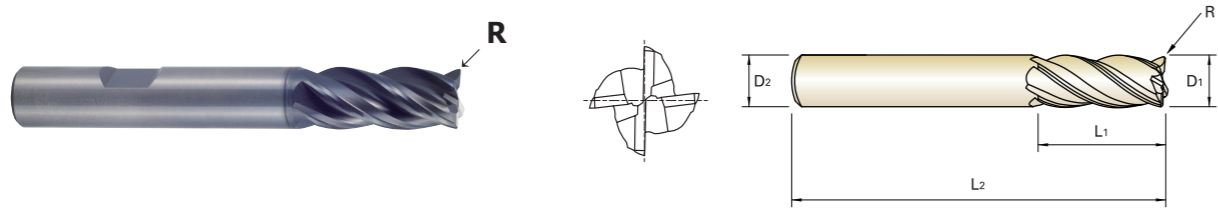

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF58030	GMF59030	R0.3	3.0	6	8	57
GMF58901	GMF59901	R0.5	3.0	6	8	57
GMF58040	GMF59040	R0.3	4.0	6	11	57
GMF58902	GMF59902	R0.5	4.0	6	11	57
GMF58050	GMF59050	R0.3	5.0	6	13	57
GMF58903	GMF59903	R0.5	5.0	6	13	57
GMF58060	GMF59060	R0.3	6.0	6	13	57
GMF58904	GMF59904	R0.5	6.0	6	13	57
GMF58905	GMF59905	R1.0	6.0	6	13	57
GMF58080	GMF59080	R0.5	8.0	8	19	63
GMF58906	GMF59906	R1.0	8.0	8	19	63
GMF58100	GMF59100	R0.5	10.0	10	22	72
GMF58907	GMF59907	R1.0	10.0	10	22	72
GMF58120	GMF59120	R0.5	12.0	12	26	83
GMF58908	GMF59908	R1.0	12.0	12	26	83
GMF58909	GMF59909	R2.0	12.0	12	26	83
GMF58140	GMF59140	R0.5	14.0	14	26	83
GMF58160	GMF59160	R1.0	16.0	16	32	92
GMF58912	GMF59912	R2.0	16.0	16	32	92
GMF58913	GMF59913	R3.0	16.0	16	32	92
GMF58180	GMF59180	R1.0	18.0	18	32	92
GMF58200	GMF59200	R1.0	20.0	20	38	104
GMF58916	GMF59916	R2.0	20.0	20	38	104
GMF58917	GMF59917	R3.0	20.0	20	38	104
GMF58250	GMF59250	R1.0	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	60	42	55	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE CORNER RADIUS WITH EXTENDED NECK**

SERIES
PLAIN SHANK **GMF62**
FLAT SHANK **GMF63**

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

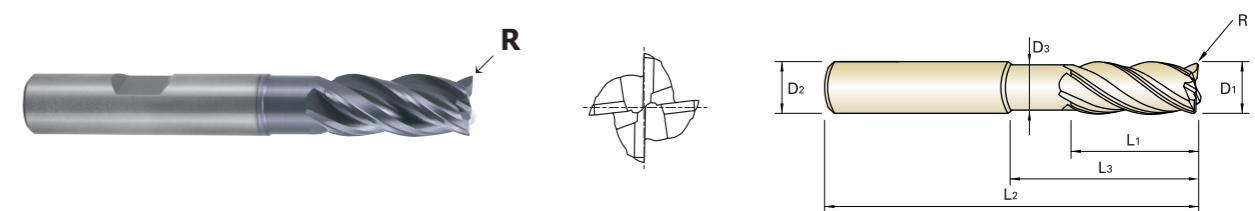

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62030	GMF63030	R0.3	3.0	6	7	12	54	2.7
GMF62901	GMF63901	R0.5	3.0	6	7	12	54	2.7
GMF62902	GMF63902	R0.3	3.0	6	7	17	57	2.7
GMF62903	GMF63903	R0.5	3.0	6	7	17	57	2.7
GMF62040	GMF63040	R0.3	4.0	6	8	15	57	3.7
GMF62904	GMF63904	R0.5	4.0	6	8	15	57	3.7
GMF62905	GMF63905	R0.3	4.0	6	8	22	63	3.7
GMF62906	GMF63906	R0.5	4.0	6	8	22	63	3.7
GMF62050	GMF63050	R0.3	5.0	6	10	17	57	4.7
GMF62907	GMF63907	R0.5	5.0	6	10	17	57	4.7
GMF62908	GMF63908	R0.3	5.0	6	10	27	67	4.7
GMF62909	GMF63909	R0.5	5.0	6	10	27	67	4.7
GMF62060	GMF63060	R0.3	6.0	6	10	15	57	5.5
GMF62910	GMF63910	R0.5	6.0	6	10	15	57	5.5
GMF62911	GMF63911	R1.0	6.0	6	10	15	57	5.5
GMF62912	GMF63912	R0.3	6.0	6	10	20	62	5.5
GMF62913	GMF63913	R0.5	6.0	6	10	20	62	5.5
GMF62914	GMF63914	R1.0	6.0	6	10	20	62	5.5
GMF62915	GMF63915	R0.3	6.0	6	10	32	74	5.5
GMF62916	GMF63916	R0.5	6.0	6	10	32	74	5.5
GMF62917	GMF63917	R1.0	6.0	6	10	32	74	5.5
GMF62080	GMF63080	R0.5	8.0	8	12	20	63	7.5
GMF62918	GMF63918	R1.0	8.0	8	12	20	63	7.5
GMF62919	GMF63919	R0.5	8.0	8	12	30	73	7.5

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	55	60	42	55	55	60	42	55	55	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

PLAIN SHANK **GMF62**
FLAT SHANK **GMF63**

Y-COATED SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS WITH EXTENDED NECK

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

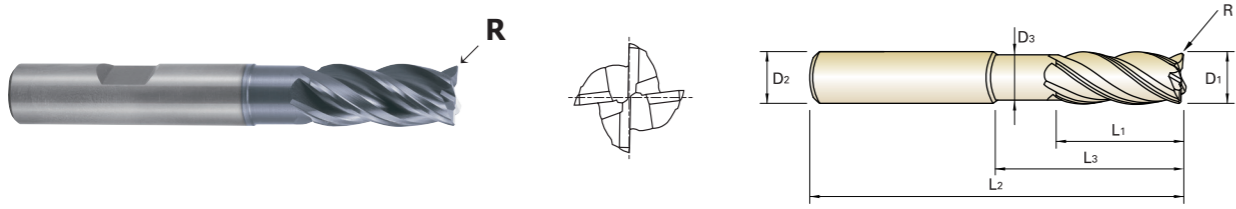

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62920	GMF63920	R1.0	8.0	8	12	30	73	7.5
GMF62921	GMF63921	R0.5	8.0	8	12	46	90	7.5
GMF62922	GMF63922	R1.0	8.0	8	12	46	90	7.5
GMF62100	GMF63100	R0.5	10.0	10	14	25	72	9.2
GMF62923	GMF63923	R1.0	10.0	10	14	25	72	9.2
GMF62924	GMF63924	R0.5	10.0	10	14	35	82	9.2
GMF62925	GMF63925	R1.0	10.0	10	14	35	82	9.2
GMF62926	GMF63926	R0.5	10.0	10	14	55	102	9.2
GMF62927	GMF63927	R1.0	10.0	10	14	55	102	9.2
GMF62120	GMF63120	R0.5	12.0	12	16	30	83	11.0
GMF62928	GMF63928	R1.0	12.0	12	16	30	83	11.0
GMF62929	GMF63929	R2.0	12.0	12	16	30	83	11.0
GMF62930	GMF63930	R0.5	12.0	12	16	40	93	11.0
GMF62931	GMF63931	R1.0	12.0	12	16	40	93	11.0
GMF62932	GMF63932	R2.0	12.0	12	16	40	93	11.0
GMF62933	GMF63933	R0.5	12.0	12	16	64	117	11.0
GMF62934	GMF63934	R1.0	12.0	12	16	64	117	11.0
GMF62935	GMF63935	R2.0	12.0	12	16	64	117	11.0
GMF62160	GMF63160	R1.0	16.0	16	22	38	92	15.0
GMF62936	GMF63936	R2.0	16.0	16	22	38	92	15.0
GMF62937	GMF63937	R3.0	16.0	16	22	38	92	15.0
GMF62938	GMF63938	R1.0	16.0	16	22	55	109	15.0
GMF62939	GMF63939	R2.0	16.0	16	22	55	109	15.0
GMF62940	GMF63940	R3.0	16.0	16	22	55	109	15.0

▶ NEXT PAGE

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ -0.02	h5
Over Ø12	0 ~ -0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron	Nodular cast iron	Malleable cast iron																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	13	25	28	32	38	10	29	32	38	45	10	26	30	36	10	26	30	36	42	55	55	60	60	60	60	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
HB	125	190	250	270	300	180	275	300	350	200	240	180	180	260	160	250	130	230																							
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎				

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

PLAIN SHANK **GMF62**
FLAT SHANK **GMF63**

Y-COATED SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS WITH EXTENDED NECK

- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

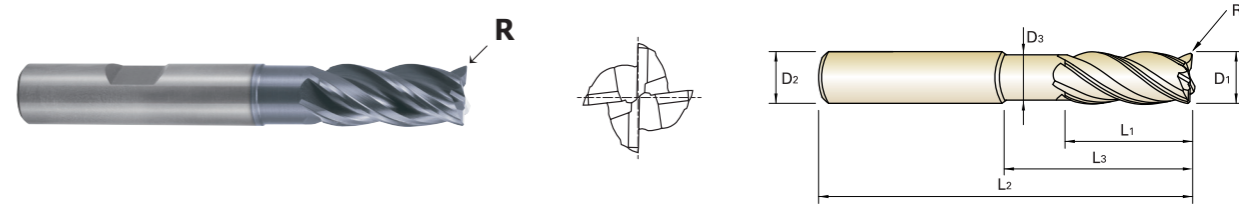

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62941	GMF63941	R1.0	16.0	16	22	87	141	15.0
GMF62942	GMF63942	R2.0	16.0	16	22	87	141	15.0
GMF62943	GMF63943	R3.0	16.0	16	22	87	141	15.0
GMF62200	GMF63200	R1.0	20.0	20	26	50	104	19.0
GMF62944	GMF63944	R2.0	20.0	20	26	50	104	19.0
GMF62945	GMF63945	R3.0	20.0	20	26	50	104	19.0
GMF62946	GMF63946	R1.0	20.0	20	26	70	124	19.0
GMF62947	GMF63947	R2.0	20.0	20	26	70	124	19.0
GMF62948	GMF63948	R3.0	20.0	20	26	70	124	19.0
GMF62949	GMF63949	R1.0	20.0	20	26	110	164	19.0
GMF62950	GMF63950	R2.0	20.0	20	26	110	164	19.0
GMF62951	GMF63951	R3.0	20.0	20	26	110	164	19.0

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ -0.02	h5
Over Ø12	0 ~ -0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron	Nodular cast iron	Malleable cast iron																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	13	25	28	32	38	10	29	32	38	45	10	26	30	36	10	26	30	36	42	55	55	60	60	60	60	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550					
HB	125	190	250	270	300	180	275	300	350	200	240	180	180	260	160	250	130	230																							
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Y-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

SERIES
PLAIN SHANK **GMF52**
FLAT SHANK **GMF53**


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

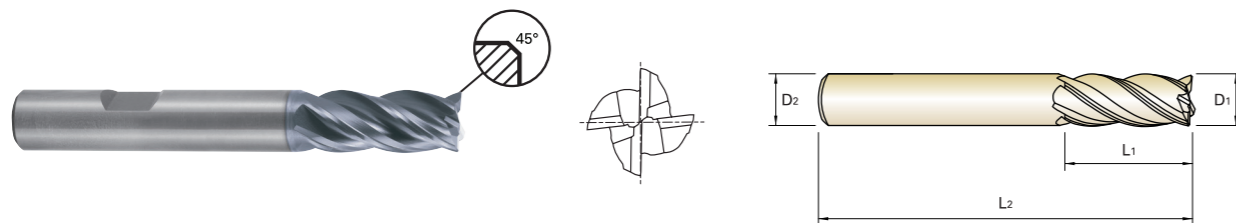

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF52030	GMF53030	3.0	6	7	54	0.10
GMF52040	GMF53040	4.0	6	8	54	0.15
GMF52050	GMF53050	5.0	6	10	54	0.15
GMF52060	GMF53060	6.0	6	10	54	0.20
GMF52080	GMF53080	8.0	8	12	58	0.20
GMF52100	GMF53100	10.0	10	14	66	0.30
GMF52120	GMF53120	12.0	12	16	73	0.35
GMF52140	GMF53140	14.0	14	18	75	0.40
GMF52160	GMF53160	16.0	16	22	82	0.40
GMF52180	GMF53180	18.0	18	24	84	0.50
GMF52200	GMF53200	20.0	20	26	92	0.50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02 h5
Over Ø12	0 ~ - 0.03 * Shank Dia. ≥ Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P										M					K																											
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	13	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S										H																										
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys					Hardened steel					Chilled Cast Iron					Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62					
HRc	60	100	75	90	130	110	90	100	100	100	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400				
HB	60	100	75	90	130	110	90	100	100	100	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400			
Recommend																																															

Y-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

SERIES
PLAIN SHANK **GMF56**
FLAT SHANK **GMF57**


- Special flute geometry and multiple helix eliminate vibrations
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

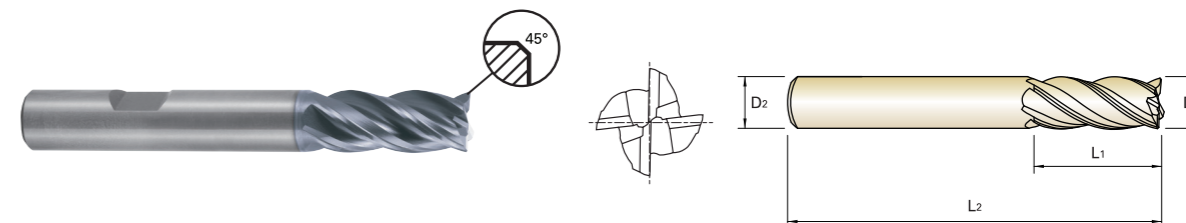

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF56030	GMF57030	3.0	6	8	57	0.10
GMF56040	GMF57040	4.0	6	11	57	0.15
GMF56050	GMF57050	5.0	6	13	57	0.15
GMF56060	GMF57060	6.0	6	13	57	0.20
GMF56080	GMF57080	8.0	8	19	63	0.20
GMF56100	GMF57100	10.0	10	22	72	0.30
GMF56120	GMF57120	12.0	12	26	83	0.35
GMF56140	GMF57140	14.0	14	26	83	0.40
GMF56160	GMF57160	16.0	16	32	92	0.40
GMF56180	GMF57180	18.0	18	32	92	0.50
GMF56200	GMF57200	20.0	20	38	104	0.50
GMF56250	GMF57250	25.0	25	38	104	0.50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02 h5
Over Ø12	0 ~ - 0.03 * Shank Dia. ≥ Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO	P										M					K																														
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41					
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	13	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S										H																											
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials					Heat Resistant Super Alloys					Titanium Alloys					Hardened steel					Chilled Cast Iron					Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62						
HRc	60	100	75	90	130	110	90	100	100	100	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400			
HB	60	100	75	90	130	110	90	100	100	100	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400	400			
Recommend																																																

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE WITH EXTENDED NECK**

SERIES
PLAIN SHANK **GMF60**
FLAT SHANK **GMF61**


- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

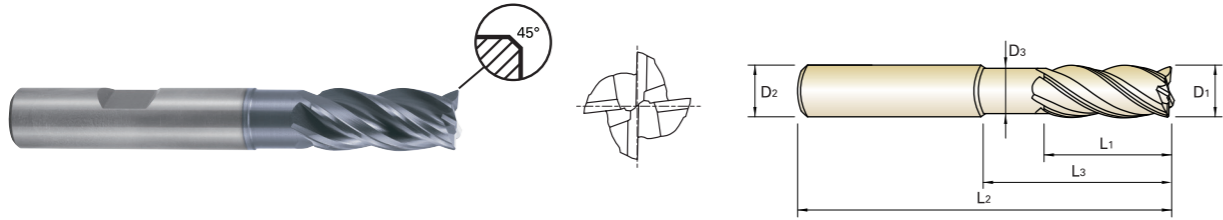

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60030	GMF61030	3.0	6	7	12	54	2.7	0.10
GMF60901	GMF61901	3.0	6	7	17	57	2.7	0.10
GMF60902	GMF61902	3.0	6	8	14	57	2.7	0.10
GMF60040	GMF61040	4.0	6	8	15	57	3.7	0.15
GMF60903	GMF61903	4.0	6	8	22	63	3.7	0.15
GMF60904	GMF61904	4.0	6	11	16	57	3.7	0.15
GMF60050	GMF61050	5.0	6	10	17	57	4.7	0.15
GMF60905	GMF61905	5.0	6	10	27	67	4.7	0.15
GMF60906	GMF61906	5.0	6	13	18	57	4.7	0.15
GMF60060	GMF61060	6.0	6	10	15	57	5.5	0.20
GMF60907	GMF61907	6.0	6	10	20	62	5.5	0.20
GMF60908	GMF61908	6.0	6	10	32	74	5.5	0.20
GMF60909	GMF61909	6.0	6	13	21	57	5.5	0.20
GMF60080	GMF61080	8.0	8	12	20	63	7.5	0.20
GMF60910	GMF61910	8.0	8	12	30	73	7.5	0.20
GMF60911	GMF61911	8.0	8	12	46	90	7.5	0.20
GMF60912	GMF61912	8.0	8	19	27	63	7.5	0.20
GMF60100	GMF61100	10.0	10	14	25	72	9.2	0.30
GMF60913	GMF61913	10.0	10	14	35	82	9.2	0.30
GMF60914	GMF61914	10.0	10	14	55	102	9.2	0.30
GMF60915	GMF61915	10.0	10	22	32	72	9.2	0.30

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02 h5
Over Ø12	0 ~ - 0.03 * Shank Dia. ≥ Ø12 : h6



▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
4 FLUTE WITH EXTENDED NECK**

SERIES
PLAIN SHANK **GMF60**
FLAT SHANK **GMF61**


- ▶ Special flute geometry and multiple helix eliminate vibrations
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

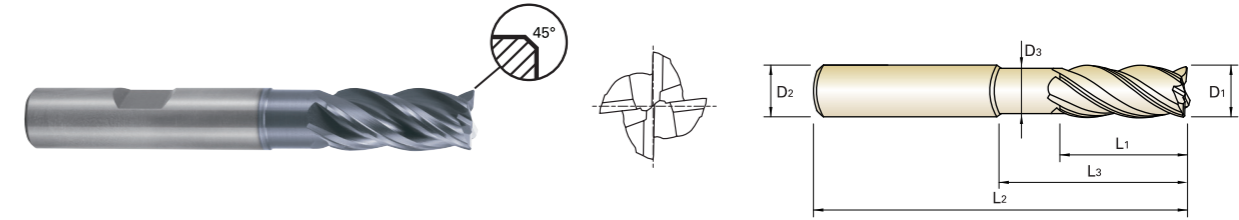

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60120	GMF61120	12.0	12	16	30	83	11.0	0.35
GMF60916	GMF61916	12.0	12	16	40	93	11.0	0.35
GMF60917	GMF61917	12.0	12	16	64	117	11.0	0.35
GMF60918	GMF61918	12.0	12	26	38	83	11.0	0.35
GMF60160	GMF61160	16.0	16	22	38	92	15.0	0.40
GMF60919	GMF61919	16.0	16	22	55	109	15.0	0.40
GMF60920	GMF61920	16.0	16	22	87	141	15.0	0.40
GMF60921	GMF61921	16.0	16	32	44	92	15.0	0.40
GMF60200	GMF61200	20.0	20	26	50	104	19.0	0.50
GMF60922	GMF61922	20.0	20	26	70	124	19.0	0.50
GMF60923	GMF61923	20.0	20	26	110	164	19.0	0.50
GMF60924	GMF61924	20.0	20	38	54	104	19.0	0.50

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02 h5
Over Ø12	0 ~ - 0.03 * Shank Dia. ≥ Ø12 : h6

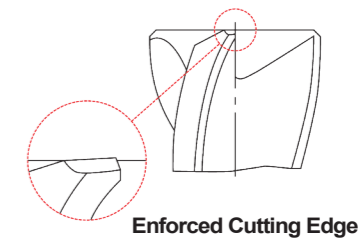

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S				H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE CORNER RADIUS LONG LENGTH**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

SERIES
PLAIN SHANK **GMG16**
FLAT SHANK **GMG17**

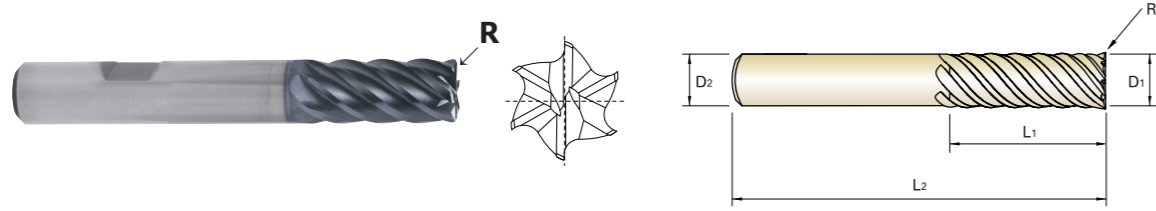

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT					
GMG16060	GMG17060	R0.5	6.0	6	13	57
GMG16901	GMG17901	R1.0	6.0	6	13	57
GMG16080	GMG17080	R0.5	8.0	8	19	63
GMG16902	GMG17902	R1.0	8.0	8	19	63
GMG16100	GMG17100	R0.5	10.0	10	22	72
GMG16903	GMG17903	R1.0	10.0	10	22	72
GMG16904	GMG17904	R1.5	10.0	10	22	72
GMG16905	GMG17905	R2.0	10.0	10	22	72
GMG16120	GMG17120	R0.5	12.0	12	26	83
GMG16906	GMG17906	R1.0	12.0	12	26	83
GMG16907	GMG17907	R1.5	12.0	12	26	83
GMG16908	GMG17908	R2.0	12.0	12	26	83
GMG16909	GMG17909	R3.0	12.0	12	26	83
GMG16160	GMG17160	R1.0	16.0	16	32	92
GMG16910	GMG17910	R1.5	16.0	16	32	92
GMG16911	GMG17911	R2.0	16.0	16	32	92
GMG16912	GMG17912	R3.0	16.0	16	32	92
GMG16200	GMG17200	R1.0	20.0	20	38	104
GMG16913	GMG17913	R1.5	20.0	20	38	104
GMG16914	GMG17914	R2.0	20.0	20	38	104
GMG16915	GMG17915	R3.0	20.0	20	38	104
GMG16250	GMG17250	R1.0	25.0	25	44	104
GMG16916	GMG17916	R1.5	25.0	25	44	104
GMG16917	GMG17917	R2.0	25.0	25	44	104
GMG16918	GMG17918	R3.0	25.0	25	44	104

	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to Ø12	0 ~ -0.02	h5
Over Ø12	0 ~ -0.03	* Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P											M					K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE CORNER RADIUS EXTRA LONG LENGTH**

- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

SERIES
PLAIN SHANK **GMG18**
FLAT SHANK **GMG19**

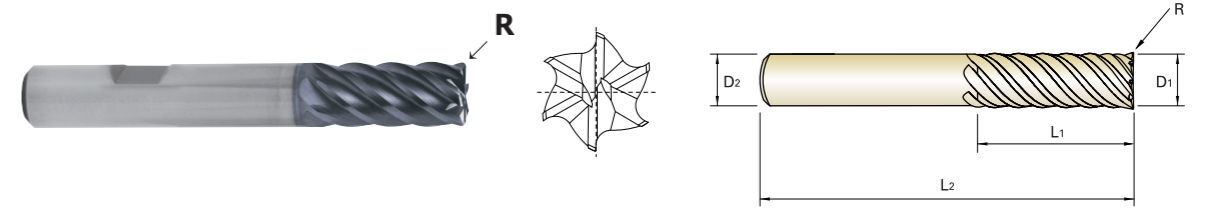

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT					
GMG18060	GMG19060	R0.5	6.0	6	24	75
GMG18901	GMG19901	R1.0	6.0	6	24	75
GMG18080	GMG19080	R0.5	8.0	8	32	75
GMG18902	GMG19902	R1.0	8.0	8	32	75
GMG18903	GMG19903	R2.0	8.0	8	32	75
GMG18100	GMG19100	R0.5	10.0	10	40	100
GMG18904	GMG19904	R1.0	10.0	10	40	100
GMG18905	GMG19905	R1.5	10.0	10	40	100
GMG18906	GMG19906	R2.0	10.0	10	40	100
GMG18120	GMG19120	R0.5	12.0	12	48	120
GMG18907	GMG19907	R1.0	12.0	12	48	120
GMG18908	GMG19908	R1.5	12.0	12	48	120
GMG18909	GMG19909	R2.0	12.0	12	48	120
GMG18910	GMG19910	R3.0	12.0	12	48	120
GMG18160	GMG19160	R1.0	16.0	16	64	140
GMG18911	GMG19911	R1.5	16.0	16	64	140
GMG18912	GMG19912	R2.0	16.0	16	64	140
GMG18913	GMG19913	R3.0	16.0	16	64	140
GMG18200	GMG19200	R1.0	20.0	20	80	150
GMG18914	GMG19914	R1.5	20.0	20	80	150
GMG18915	GMG19915	R2.0	20.0	20	80	150
GMG18916	GMG19916	R3.0	20.0	20	80	150
GMG18917	GMG19917	R4.0	20.0	20	80	150
GMG18918	GMG19918	R5.0	20.0	20	80	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5 * Shank Dia. ≥ Ø12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P											M					K				
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

PLAIN SHANK **GMG18**
 FLAT SHANK **GMG19**

Y-COATED SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

- The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

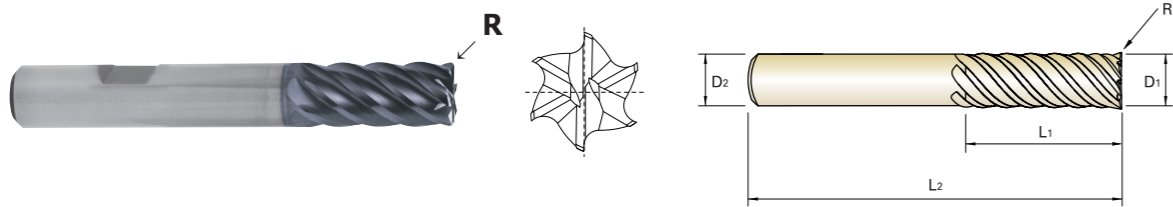

Unit : mm


EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT		D1	D2	L1	L2
GMG18250	GMG19250	R1.0	25.0	25	100	170
GMG18919	GMG19919	R1.5	25.0	25	100	170
GMG18920	GMG19920	R2.0	25.0	25	100	170
GMG18921	GMG19921	R3.0	25.0	25	100	170
GMG18922	GMG19922	R4.0	25.0	25	100	170
GMG18923	GMG19923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12 : h6

PLAIN SHANK **GMH58**
 FLAT SHANK **GMH59**

Y-COATED SOLID CARBIDE END MILLS 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

- Special chip splitter design for better chip removal shortened chip length at high axial machining
- High Performance for Steels, Stainless Steels and Cast Iron

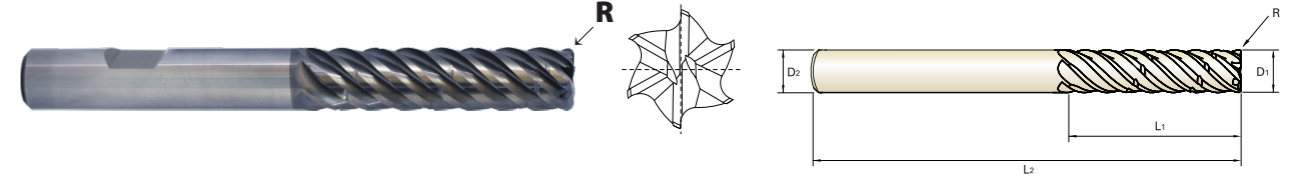

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT		D1	D2	L1	L2
GMH58060	GMH59060	R0.5	6.0	6	24	75
GMH58901	GMH59901	R1.0	6.0	6	24	75
GMH58080	GMH59080	R0.5	8.0	8	32	75
GMH58902	GMH59902	R1.0	8.0	8	32	75
GMH58903	GMH59903	R2.0	8.0	8	32	75
GMH58100	GMH59100	R0.5	10.0	10	40	100
GMH58904	GMH59904	R1.0	10.0	10	40	100
GMH58905	GMH59905	R1.5	10.0	10	40	100
GMH58906	GMH59906	R2.0	10.0	10	40	100
GMH58120	GMH59120	R0.5	12.0	12	48	120
GMH58907	GMH59907	R1.0	12.0	12	48	120
GMH58908	GMH59908	R1.5	12.0	12	48	120
GMH58909	GMH59909	R2.0	12.0	12	48	120
GMH58910	GMH59910	R3.0	12.0	12	48	120
GMH58160	GMH59160	R1.0	16.0	16	64	140
GMH58911	GMH59911	R1.5	16.0	16	64	140
GMH58912	GMH59912	R2.0	16.0	16	64	140
GMH58913	GMH59913	R3.0	16.0	16	64	140

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12 : h6

► NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO Material Description	N					S							H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100													
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


◎ : Excellent ○ : Good

ISO Material Description	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO Material Description	N					S							H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100													
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER**

SERIES
PLAIN SHANK **GMH58**
FLAT SHANK **GMH59**

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron

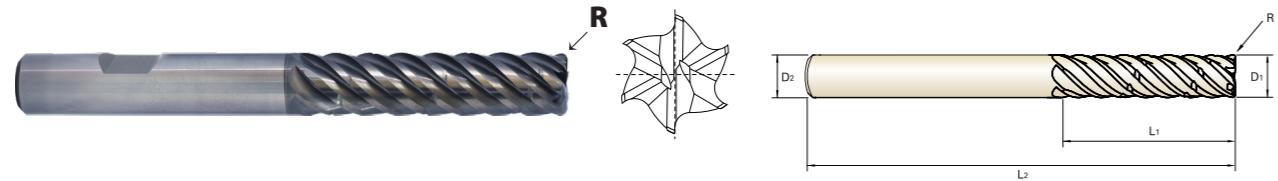

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT					
GMH58200	GMH59200	R1.0	20.0	20	80	150
GMH58914	GMH59914	R1.5	20.0	20	80	150
GMH58915	GMH59915	R2.0	20.0	20	80	150
GMH58916	GMH59916	R3.0	20.0	20	80	150
GMH58917	GMH59917	R4.0	20.0	20	80	150
GMH58918	GMH59918	R5.0	20.0	20	80	150
GMH58250	GMH59250	R1.0	25.0	25	100	170
GMH58919	GMH59919	R1.5	25.0	25	100	170
GMH58920	GMH59920	R2.0	25.0	25	100	170
GMH58921	GMH59921	R3.0	25.0	25	100	170
GMH58922	GMH59922	R4.0	25.0	25	100	170
GMH58923	GMH59923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ φ12 : h6

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc						15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE LONG LENGTH**

SERIES
PLAIN SHANK **GMG12**
FLAT SHANK **GMG13**


- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

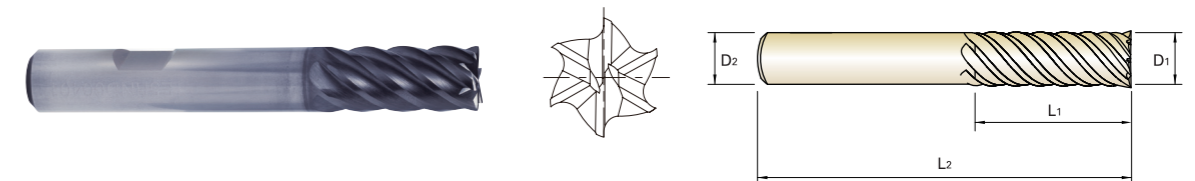

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT				
GMG12060	GMG13060	6.0	6	13	57
GMG12080	GMG13080	8.0	8	19	63
GMG12100	GMG13100	10.0	10	22	72
GMG12120	GMG13120	12.0	12	26	83
GMG12160	GMG13160	16.0	16	32	92
GMG12200	GMG13200	20.0	20	38	104
GMG12250	GMG13250	25.0	25	44	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Up to φ12 : 0 ~ - 0.02	h5
Over φ12 : 0 ~ - 0.03	* Shank Dia. ≥ φ12 : h6

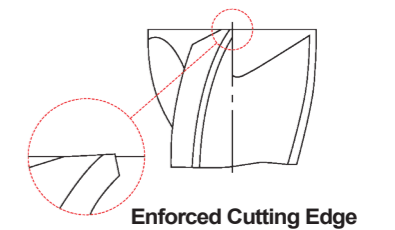

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	15	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc						15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE EXTRA LONG LENGTH**

SERIES
PLAIN SHANK **GMG14**
FLAT SHANK **GMG15**


- ▶ The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶ Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRC40

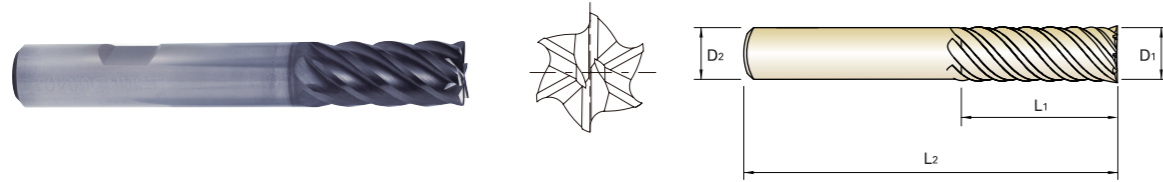

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	D1	D2	L1	L2	
GMG14060	GMG15060	6.0	6	24	75	
GMG14080	GMG15080	8.0	8	32	75	
GMG14100	GMG15100	10.0	10	40	100	
GMG14120	GMG15120	12.0	12	48	120	
GMG14160	GMG15160	16.0	16	64	140	
GMG14200	GMG15200	20.0	20	80	150	
GMG14250	GMG15250	25.0	25	100	170	

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12 : h6

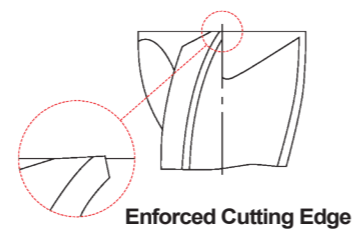

Enforced Cutting Edge

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○			○	○	○	○	○	○	○	○	○	○	○

**Y-COATED SOLID CARBIDE END MILLS
6 FLUTE EXTRA LONG LENGTH CHIP SPLITTER**

SERIES
PLAIN SHANK **GMH56**
FLAT SHANK **GMH57**


- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron

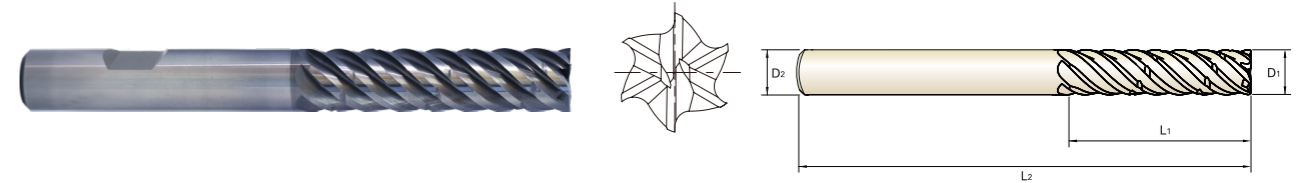

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	D1	D2	L1	L2	
GMH56060	GMH57060	6.0	6	24	75	
GMH56080	GMH57080	8.0	8	32	75	
GMH56100	GMH57100	10.0	10	40	100	
GMH56120	GMH57120	12.0	12	48	120	
GMH56160	GMH57160	16.0	16	64	140	
GMH56200	GMH57200	20.0	20	80	150	
GMH56250	GMH57250	25.0	25	100	170	

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ Ø12 : h6

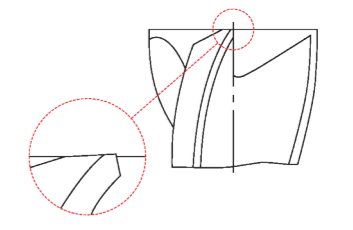

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S						H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○			○	○	○	○	○	○	○	○	○	○	○

**AITiN-COATED SOLID CARBIDE END MILLS
5 FLUTE LONG LENGTH**

SERIES
PLAIN SHANK **EMB72**
FLAT SHANK **EMB73**


- ▶ Special flute geometry eliminates vibrations
- ▶ Designed for mild steels, stainless steels, cast iron, tool steels, titanium alloys, prehardened steels and low hardness materials under HRC40
- ▶ Excellent finished work piece
- ▶ Higher speeds, deeper cuts and excellent metal removal rates



Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT					
EMB72060	EMB73060	6.0	6	13	57	0.1
EMB72080	EMB73080	8.0	8	19	63	0.1
EMB72100	EMB73100	10.0	10	22	72	0.1
EMB72120	EMB73120	12.0	12	26	83	0.1
EMB72140	EMB73140	14.0	14	26	83	0.2
EMB72160	EMB73160	16.0	16	32	92	0.2
EMB72180	EMB73180	18.0	18	32	92	0.2
EMB72200	EMB73200	20.0	20	38	104	0.2
EMB72250	EMB73250	25.0	25	38	104	0.2


Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia. ≥ φ12 : h6



GMG55, GMG56 SERIES 4 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)												
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	18.0	20.0	25.0		
P	1-4	Non-alloy steel	0.5D	1.0D	Vc	162	162	162	162	162	162	162	162	162	162	162	162	162
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.075	0.08	0.09	0.099		
	RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063						
	FEED	1719	1392	1238	1375	1547	1341	1203	967	917	928	817						
	5	Low alloy steel	0.5D	1.0D	Vc	113	113	113	113	113	113	113	113	113	113	113	113	
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.074	0.079	0.09	0.099		
					RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439		
	FEED	1199	971	863	959	1079	935	839	665	631	647	570						
	6-7	Low alloy steel	0.5D	1.0D	Vc	162	162	162	162	162	162	162	162	162	162	162	162	
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.075	0.08	0.09	0.099		
					RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063		
	FEED	1719	1392	1238	1375	1547	1341	1203	967	917	928	817						
8-9	Low alloy steel	0.5D	1.0D	Vc	113	113	113	113	113	113	113	113	113	113	113			
				fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.074	0.079	0.09	0.099			
				RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439			
FEED	1199	971	863	959	1079	935	839	665	631	647	570							
10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	Vc	68	68	68	68	68	68	68	68	68	68	68			
				fz	0.017	0.019	0.021	0.028	0.042	0.045	0.049	0.052	0.056	0.063	0.07			
				RPM	7215	5411	4329	3608	2706	2165	1804	1353	1203	1082	866			
FEED	491	411	364	404	455	390	354	281	269	273	242							
M	12-13	Stainless steel	0.5D	1.0D	Vc	77	77	77	77	77	77	77	77	77	77	77		
					fz	0.015	0.015	0.025	0.03	0.04	0.045	0.05	0.054	0.059	0.058	0.059		
					RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980		
	FEED	490	368	490	490	490	441	408	331	321	284	231						
	14.1	Stainless steel	0.5D	1.0D	Vc	85	85	85	85	85	85	85	85	85	85	85		
					fz	0.02	0.02	0.025	0.041	0.045	0.05	0.055	0.06	0.064	0.065	0.068		
					RPM	9019	6764	5411	4509	3382	2706	2255	1691	1503	1353	1082		
	FEED	722	541	541	740	609	541	496	406	385	352	294						
	14.2	Stainless steel	0.5D	1.0D	Vc	77	77	77	77	77	77	77	77	77	77	77		
					fz	0.02	0.02	0.025	0.041	0.045	0.05	0.055	0.06	0.064	0.065	0.068		
					RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980		
	FEED	654	490	490	670	551	490	449	368	349	319	267						
K	15-20	Grey cast iron	0.5D	1.0D	Vc	119	119	119	119	119	119	119	119	119	119	119		
					fz	0.031	0.033	0.037	0.05	0.074	0.081	0.087	0.093	0.099	0.112	0.124		
					RPM	12626	9470	7576	6313	4735	3788	3157	2367	2104	1894	1515		
FEED	1566	1250	1121	1263	1402	1227	1098	881	833	848	752							
S	31-35	Heat Resistant Super Alloys	0.2D	0.3D	Vc	21	21	21	21	21	21	21	21	21	21	21		
					fz	0.014	0.014	0.017	0.028	0.031	0.035	0.038	0.042	0.045	0.045	0.048		
					RPM	2228	1671	1337	1114	836	668	557	418	371	334	267		
	FEED	125	94	91	125	104	94	85	70	67	60	51						
	36-37	Titanium Alloys	0.5D	0.3D	Vc	47	47	47	47	47	47	47	47	47	47	47		
					fz	0.018	0.018	0.022	0.037	0.04	0.045	0.049	0.054	0.058	0.058	0.061		
RPM					4987	3740	2992	2493	1870	1496	1247	935	831	748	598			
FEED	359	269	263	369	299	269	244	202	193	174	146							



◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	45	15	23	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	○	○	○	◎	◎	○	○	○	◎	◎	◎	◎	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	◎	○	○	○	○

GMH58 GMH59 GMH56 GMH57 6 FLUTE CHIP SPLITTER - **SIDE CUTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13	Stainless steel	0.05D	3.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	3.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2	Stainless steel	0.05D	3.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	3.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	3.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	3.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028



EMB72, EMB73 SERIES 5 FLUTE - **SIDE CUTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1-2	Non-alloy steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	6	High alloyed steel, and tool steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	10	High alloyed steel, and tool steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
M	12-13	Stainless steel	0.25D	1.25D	Vc	105	105	105	145	105	105	105
					fz	0.030	0.032	0.038	0.043	0.064	0.068	0.076
					RPM	5570	4178	3342	3846	2387	2089	1671
					FEED	836	668	635	827	764	710	635
	14.1	Stainless steel	0.25D	1.25D	Vc	115	115	115	115	115	115	115
					fz	0.030	0.032	0.038	0.063	0.065	0.069	0.076
					RPM	6101	4576	3661	3050	2615	2288	1830
					FEED	915	732	696	961	850	789	696
K	15-20	Grey cast iron	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
S	31-35	Heat Resistant Super Alloys	0.25D	1.0D	Vc	25	25	25	25	25	25	25
					fz	0.017	0.020	0.025	0.036	0.045	0.048	0.060
					RPM	1326	995	796	663	568	497	398
					FEED	113	99	99	119	128	119	119
	36-37	Titanium Alloys	0.25D	1.25D	Vc	85	85	85	85	85	85	85
					fz	0.030	0.031	0.038	0.050	0.057	0.063	0.075
					RPM	4509	3382	2706	2255	1933	1691	1353
					FEED	676	524	514	564	551	533	507



MEMO



A large grid of small squares for writing notes, occupying the main body of the page.

MEMO



A large grid of small squares for writing notes, occupying the main body of the page.

MEMO



HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TÜRKIYE
CZECH REPUBLIC	GERMANY	NORWAY	SWEDEN	UNITED KINGDOM	DENMARK
HUNGARY	POLAND	SERBIA	SWITZERLAND	AUSTRIA	GREECE
ALBANIA	BOSNIA AND HERZEGOVINA	UKRAINE	UZBEKISTAN	BULGARIA	
ESTONIA					

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SOUTH KOREA	VIETNAM
CHINA	ISRAEL	PAKISTAN	TAIWAN	
HONG KONG	JAPAN	PHILIPPINES	THAILAND	
INDIA	SAUDI ARABIA	SINGAPORE	UNITED ARAB EMIRATES	

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------

YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea
Phone: +82-32-526-0909
www.yg1.solutions
E-mail: yg1@yg1.solutions



YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

www.yg1.solutions

E-mail: yg1@yg1.solutions

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1Y EVP2405005